



Motor/Pump Units

Direct Drive Pump/Motor Units — Long Coupled Design —


Direct-Drive Pump & Motor Units featuring *CAT Pumps®* plunger pumps close-coupled to *Baldor C-Face* motors.

High quality, economical components in a compact, space saving design!! Eliminates the need for cumbersome belts, guards and pulleys.

All Pumps Feature: Triplex plunger design • Bronze or Chrome-plated bronze manifolds for corrosion resistance • Polished ceramic plungers for longer service life • Unitized valves • Lubricated packing design cooled by pumped liquid for longer seal life.

All motors are Totally Enclosed, Fan Cooled. Single phase motors are standard with Capacitor Start feature. Three phase motors are 230/460 volt. Single phase motors are 115/230 volts.

**240C33C
(Long Coupled)**

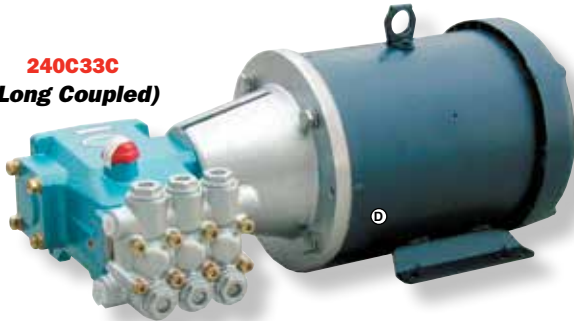

Specifications: Inlet ports on all pumps are 1/2" FPT. Outlet ports on all pumps are 3/8" FPT. Maximum operating temperature is 160° F. Maximum operating RPM is 1725. Maximum inlet pressure is 60 PSI.

Pump & Motor Combinations

Part No.	Pump Model	Maximum		HP	Phase	Wt. Lbs.
		GPM	PSI			
DU 240C31C	Cat 3CP	3.6	1200	3	1	125
DU 240C33C	Cat 3CP	3.6	1200	3	3	120
DU 340C31C	Cat 5CP	4.0	1100	3	1	135
DU 340C33C	Cat 5CP	4.0	1100	3	3	110
DU 340C51C	Cat 5CP	4.0	1800	5	1	115
DU 340C53C	Cat 5CP	4.0	1800	5	3	115

Giant Pump/Motor Combinations also available !

Oil Drain Kit For CAT PUMPS




Easily change pump oil when needed with **Oil Drain Kits** from *CAT Pumps®*. Designed to be mounted to flat surface or panel mounted. Kits include hose, angle plate, panel nut, plug and o-ring.

34334 Kits fit all piston pumps up to 60FR series and plunger pumps up to 35FR series. Does not fit 2SF, 2DX, 2SFX, 3DNX, 3DX, 3SP and 4DNX.

990394 Kits fit 2DX, 2SF, 2SFX, 3DNX, 3DX, 3SP, 3SPX, 4DNX and 4SF pumps.

34314 Kits fit piston pumps 6020 through 6041, plunger pumps 3501 through 3560, 3801 through 3841K, 6747 through 6777 and 6801 through 6861K.

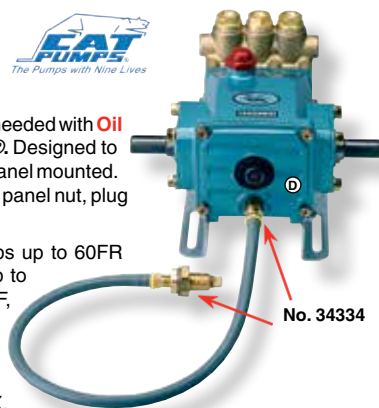

Part No.	Description
CC 34334	Oil Drain Kit for Pumps Shown Above
CC 990394	Oil Drain Kit for Pumps Shown Above
CC 34314	Oil Drain Kit for Pumps Shown Above



BD Series Close-Coupled Pump & Motor Units

Close-Coupled Pump and Motor Units from *CAT Pumps®* eliminate cumbersome belts and pulleys as well as clumsy belt guards. Direct-drive design allows pumps to run at a faster RPM which smooths pump discharge so that a pulsation device is not necessary. Pumps are standard with *Baldor* motors.

240BD31




All units feature *CAT Pumps®* Ceramic Plunger Pumps. Motors are "American Made" 3 HP Totally Enclosed, Fan Cooled, 230 Volt Single Phase or 208/230/460 Volt three Phase, 1725 RPM. Single Phase motors are capacitor start.

240/270/3CP SERIES PUMP & MOTOR UNITS

Part No.	PSI @ GPM	ELECTRIC MOTOR	Wt. Lbs.
CC 240BD31	1200 3.6	3 HP-Single Phase	127
CC 240BD33	1200 3.6	3 HP-Three Phase	125
CC 270BD31	1000 4.2	3 HP-Single Phase	127
CC 270BD33	1000 4.2	3 HP-Three Phase	125
CC 3CP1120BD31	1000 4.2	3 HP-Single Phase	127
CC 3CP1120BD33	1000 4.2	3 HP-Three Phase	125

340/350/5CP Series Pump Motor Units

Short Coupled Design

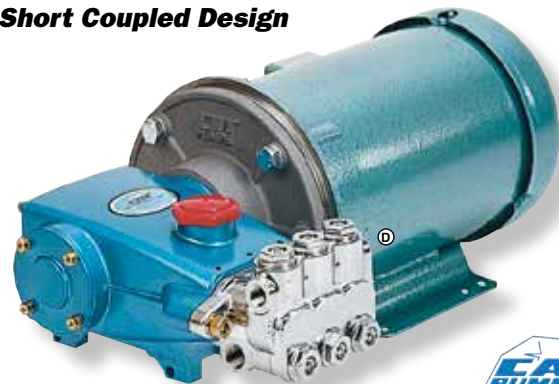

All units feature the *CAT Pumps®* Ceramic Plunger Pumps. *Baldor* Motors in 3 or 5 HP versions are Totally Enclosed, Fan Cooled, 1725 RPM, 230 Volt Single Phase or 208/230/460 Volt three Phase. Single Phase motors are capacitor start. Short coupled, compact design.

PUMP & MOTOR UNITS

Part No.	PSI @ GPM	ELECTRIC MOTOR	Wt. Lbs.
CC 340BD31	1100 4	3 HP-Single Phase	132
CC 340BD33	1100 4	3 HP-Three Phase	112
CC 340BD51	1800 4	5 HP-Single Phase	139
CC 340BD53	1800 4	5 HP-Three Phase	113
CC 350BD51	1450 5	5 HP-Single Phase	139
CC 350BD53	1450 5	5 HP-Three Phase	113
CC 5CP2140BD51	2000 4	5 HP-Single Phase	139
CC 5CP2140BD53	2000 4	5 HP-Three Phase	113