


mosmatic Wand Extensions

Wash Wands from Mosmatic. Swiss-Made, High Quality, Stainless Steel Wand Assemblies. Standard with insulated grip and nozzle protector. Straight and bent ends are available. Inlet is 1/4" MPT. Nozzle protectors will accept 1/8" or 1/4" MPT nozzles as noted. Rated to 4000 PSI and 250° F.



Part No.	Length	Outlet
MM 26980	20" Straight	1/8" FPT
MM 26981	20" Bent End	1/8" FPT
MM 26982	41" Straight	1/8" FPT
MM 26983	41" Bent End	1/8" FPT
MM 26703	20" Straight	1/4" FPT
MM 26723	20" Bent End	1/4" FPT
MM 26706	34" Straight	1/4" FPT
MM 26726	34" Bent End	1/4" FPT
MM 26711	41" Straight	1/4" FPT
MM 26731	41" Bent End	1/4" FPT
MM 26712	50" Straight	1/4" FPT
MM 26732	50" Bent End	1/4" FPT

Galvanized Steel Pipe Extensions with Insulated Grips



1/4" MPT thread on one end and 1/8" FPT thread on the other. Available in 18" through 27" lengths with a molded GRIP, 6" long. The 36" & 48" lengths have a molded GRIP, 11" long. Pressures to 3000 PSI and Temperatures to 250° F. maximum. For 1/8" MPT or 1/4" FPT nozzles.

LENGTH	18"	21"	27"	36"	48"
Part No.	BC 253-18	BC 253-21	BC 253-27	BC 253-36	BC 253-48
Net Ea.					

Galvanized Wand Extensions



Galvanized steel construction. These uninsulated wands are available from 18" to 72" long. Rated to 3000 psi and 250° F. Ports are 1/4" MPT inlet and 1/4" MPT x 1/8" FPT outlet for 1/8" MPT or 1/4" FPT nozzles.


Part No.		Length
BC 1/4G-18	Uninsulated Wand	18"
BC 1/4G-24	Uninsulated Wand	24"
BC 1/4G-27	Uninsulated Wand	27"
BC 1/4G-36	Uninsulated Wand	36"
BC 1/4G-48	Uninsulated Wand	48"
BC 1/4G-60	Uninsulated Wand	60"

Coated Wand Extensions



Coated Wand Extensions with built-in tip protectors. Available in blue, black or red colors and in 18" or 21" lengths. All extensions are internally tapped on discharge end for 1/8" MPT nozzles. Inlet is 1/4" MPT to fit standard spray wands. Heavy urethane coating helps to protect against scratches, gives insulating grip for customer and keeps them looking good. Rated to 3000 PSI.


Part No.	LENGTH	COLOR
BC 719T-18	18"	Blue
BC 719T-18BK	18"	Black
BC 719T-18R	18"	Red
BC 719T-21	21"	Blue
BC 719T-21BK	21"	Black



SUTTNER Plated Extensions

Wand Extensions with and without Insulated Grips. Nickel plated steel tubing. Rated to 6000 PSI. Maximum temperature is 300° F.

These lance wands are available in 18", 24", 36" or 48" straight end style or 60" & 79" with 45° curved ends. Inlet and outlet are 1/4" MPT (except for ST007-18MF) and require either female nozzles or nozzle holder/protectors shown in this catalog.

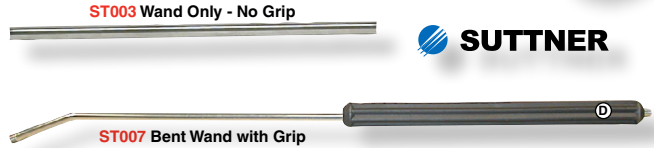


Part No.	Extension	Length
NP ST007-18	Straight Wand with Grip	18"
NP ST007-18MF	* Straight Wand with Grip	18"
NP ST007-24	Straight Wand with Grip	24"
NP ST007-36	Straight Wand with Grip	36"
NP ST007-48	Straight Wand with Grip	47"
NP ST007-60S	Straight Wand with Grip	60"
NP ST007-60	Bent Wand with Grip	60"
NP ST007-79	Bent Wand with Grip	79"
NP ST003-18	Straight Wand, No Grip	18"
NP ST003-24	Straight Wand, No Grip	24"
NP ST003-36	Straight Wand, No Grip	36"
NP ST003-48	Straight Wand, No Grip	48"

* 1/8" Female Outlet for 1/8" Male Nozzles.

Stainless Wand Extensions (1/4" MPT)

Stainless Steel Wand Extensions are shown with and without insulated grips. All models are 1/4" MPT threads on both ends, except for No. 1/4S-18 which has 1/8" FPT on one end and No. 21762 has a bent end and 1/4" FPT one one end. Pressures from 3000 PSI to 7250 PSI as shown. Rated to 300° F.

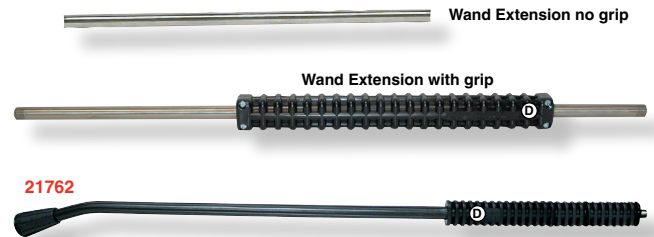

No Grip Insulator

Part No.	Length	Max. PSI
GU 21733	12"	7250
GU 21734	15"	7250
BC 1/4S-18	* 18"	3000
GU 21789	19"	7250
GU 21735	24"	7250
GU 21736	36"	7250
GU 21737	48"	7250
GU 21738	60"	7250
GU 21739	72"	7250
GU 21741	** 84"	7250
GU 21754	** 96"	7250

* 1/4" MPT x 1/8" FPT. ** Ships in 2 pieces.

With Grip Insulator

Part No.	Length	Max. PSI
GU 21742	15-1/2"	7250
GU 21743	24"	7250
GU 21744	36"	7250
NP ST002-36	36"	6000
GU 21762	* 36"	4100
GU 21745	48"	7250
NP ST002-48	47"	6000
GU 21746	60"	7250
GU 21747	72"	7250
BC 140059	79"	4100
GU 21749	** 84"	7250

* Bent Wand with Nozzle Protector. ** Ships in 2 pieces.