

## Rubber Wash Down Hoses

### Pressure Washer Hose Assemblies Smooth Cover, 1 & 2 Wire Rubber Hoses



**Smooth Cover Pressure Washer Hoses** rated to 4000 or 6000 PSI and 250° F. Available in Blue, Black or Yellow “smooth” rubber construction. All assemblies are standard 3/8” I.D. with 3/8” MPT solid ends and one hose bend restrictor.

#### 3/8” BLACK HOSE ASSEMBLIES - SMOOTH COVER

Part No.	Length	Max. PSI	Wt.
GA 6HR25	3/8" x 25', 1-Wire	4000	7 lbs.
GA 6HR35	3/8" x 35', 1-Wire	4000	9 lbs.
GA 6HR50	3/8" x 50', 1-Wire	4000	12 lbs.
GA 6HR75	3/8" x 75', 1-Wire	4000	18 lbs.
GA 6HR100	3/8" x 100', 1-Wire	4000	22 lbs.
GA 6HR125	3/8" x 125', 1-Wire	4000	28 lbs.
GA 6HR150	3/8" x 150', 1-Wire	4000	33 lbs.

#### 3/8” BLUE HOSE ASSEMBLIES - SMOOTH, NON-MARKING

Part No.	Length	Max. PSI	Wt.
DU 6BL25	3/8" x 25', 1-Wire	4000	7 lbs.
DU 6BL35	3/8" x 35', 1-Wire	4000	9 lbs.
DU 6BL50	3/8" x 50', 1-Wire	4000	12 lbs.
DU 6BL75	3/8" x 75', 1-Wire	4000	18 lbs.
DU 6BL100	3/8" x 100', 1-Wire	4000	22 lbs.
DU 6BL125	3/8" x 125', 1-Wire	4000	28 lbs.
DU 6BL150	3/8" x 150', 1-Wire	4000	33 lbs.
DU 6BL25-2	3/8" x 25', 2-Wire	6000	10 lbs.
DU 6BL50-2	3/8" x 50', 2-Wire	6000	19 lbs.
DU 6BL75-2	3/8" x 75', 2-Wire	6000	29 lbs.
DU 6BL100-2	3/8" x 100', 2-Wire	6000	35 lbs.
DU 6BL125-2	3/8" x 125', 2-Wire	6000	47 lbs.
DU 6BL150-2	3/8" x 150', 2-Wire	6000	57 lbs.

#### 3/8” YELLOW HOSE ASSEMBLIES - SMOOTH, NON-MARKING

Part No.	Length	Max. PSI	Wt.
GA 6YE25	3/8" x 25', 1-Wire	4000	7 lbs.
GA 6YE35	3/8" x 35', 1-Wire	4000	9 lbs.
GA 6YE50	3/8" x 50', 1-Wire	4000	12 lbs.
GA 6YE75	3/8" x 75', 1-Wire	4000	18 lbs.
GA 6YE100	3/8" x 100', 1-Wire	4000	22 lbs.
GA 6YE125	3/8" x 125', 1-Wire	4000	28 lbs.
GA 6YE150	3/8" x 150', 1-Wire	4000	33 lbs.

— Other Sizes Made to Order —

### Pressure Washer Hoses With Stainless Fittings

**High Pressure Washdown Hoses** with **Stainless End Fittings**. Required for many food grade applications as well as general cleaning. **Grey hoses have a wrapped style** cover for added abrasion resistance. Safety **yellow hoses have a standard smooth cover**. One wire hoses are rated to 4000 PSI and 250° F. Standard with 3/8” MPT solid 316SS fittings and one hose guard protector. (Other lengths and ends available).



#### GREY HOSE ASSEMBLIES - WRAPPED


Part No.	Length	Max. PSI	Wt.
GA 6GE25-SS	3/8" x 25'	4000	7 lbs.
GA 6GE50-SS	3/8" x 50'	4000	12 lbs.
GA 6GE100-SS	3/8" x 100'	4000	22 lbs.

#### YELLOW HOSE ASSEMBLIES - SMOOTH

Part No.	Length	Max. PSI	Wt.
GA 6YE25-SS	3/8" x 50'	4000	7 lbs.
GA 6YE50-SS	3/8" x 75'	4000	12 lbs.
GA 6YE100-SS	3/8" x 100'	4000	22 lbs.

### Pressure Washer Hose Assemblies Wrapped Cover, 1 & 2 Wire Rubber Hoses

**Wrapped Cover Pressure Washer Hoses** are rated 3000 to 10,000 PSI and 250° F. Available in Black, Gray or Yellow “wrapped” rubber construction for **added abrasion resistance**. All assemblies have MPT solid ends. One hose bend restrictor is also included.

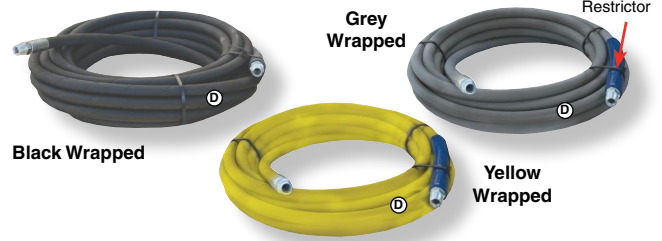

#### 3/8” BLACK HOSE ASSEMBLIES - WRAPPED COVER

Part No.	Length	Max. PSI	Wt.
GA 6BW25	3/8" x 25', 1-Wire	4000	7 lbs.
GA 6BW35	3/8" x 35', 1-Wire	4000	9 lbs.
GA 6BW50	3/8" x 50', 1-Wire	4000	12 lbs.
GA 6BW75	3/8" x 75', 1-Wire	4000	18 lbs.
GA 6BW100	3/8" x 100', 1-Wire	4000	22 lbs.
GA 6BW125	3/8" x 125', 1-Wire	4000	28 lbs.
GA 6BW150	3/8" x 150', 1-Wire	4000	33 lbs.
GA 6HR25-2	3/8" x 25', 2-Wire	6000	9 lbs.
GA 6HR50-2	3/8" x 50', 2-Wire	6000	14 lbs.
GA 6HR75-2	3/8" x 75', 2-Wire	6000	22 lbs.
GA 6HR100-2	3/8" x 100', 2-Wire	6000	29 lbs.
GA 6HR125-2	3/8" x 125', 2-Wire	6000	36 lbs.
GA 6HR150-2	3/8" x 150', 2-Wire	6000	43 lbs.

#### 1/2” BLACK/ GREY HOSE ASSEMBLIES - WRAPPED COVER

GA 8HR25	* 1/2" x 25', 1-Wire	3000	8 lbs.
GA 8HR50	* 1/2" x 50', 1-Wire	3000	14 lbs.
GA 8HR75	* 1/2" x 75', 1-Wire	3000	21 lbs.
GA 8HR100	* 1/2" x 100', 1-Wire	3000	22 lbs.
GA 8HR50-2	* 1/2" x 50', 2-Wire	4000	23 lbs.
GA 8HR100-2	* 1/2" x 100', 2-Wire	4000	45 lbs.
FN 41190	† 1/2" x 50', 2-Wire	10,000	23 lbs.
FN 41191	† 1/2" x 100', 2-Wire	10,000	47 lbs.
FN 41192	† 1/2" x 200', 2-Wire	10,000	95 lbs.

\* 1/2” MPT Ends. † Grey with 3/8” quick couplers.

#### 3/8” GREY HOSE ASSEMBLIES - WRAPPED, NON-MARKING

Part No.	Length	Max. PSI	Wt.
GA 6GE25	3/8" x 25', 1-Wire	4000	7 lbs.
GA 6GE50	3/8" x 50', 1-Wire	4000	12 lbs.
GA 6GE75	3/8" x 75', 1-Wire	4000	18 lbs.
GA 6GE100	3/8" x 100', 1-Wire	4000	22 lbs.
GA 6GE125	3/8" x 125', 1-Wire	4000	28 lbs.
GA 6GE150	3/8" x 150', 1-Wire	4000	33 lbs.
GA 6GE25-2	3/8" x 25', 2-Wire	6000	9 lbs.
GA 6GE50-2	3/8" x 50', 2-Wire	6000	14 lbs.
GA 6GE75-2	3/8" x 75', 2-Wire	6000	22 lbs.
GA 6GE100-2	3/8" x 100', 2-Wire	6000	29 lbs.
FN 41187	* 3/8" x 50', 2-Wire	10,000	22 lbs.
FN 41188	* 3/8" x 100', 2-Wire	10,000	40 lbs.
FN 41189	* 3/8" x 200', 2-Wire	10,000	80 lbs.

\* With 3/8” quick couplers.


#### 3/8” YELLOW HOSE ASSEMBLIES - WRAPPED, NON-MARKING

Part No.	Length	Max. PSI	Wt.
GA 6YW50	3/8" x 50', 1-Wire	4000	18 lbs.
GA 6YW100	3/8" x 100', 1-Wire	4000	33 lbs.

### High Abrasion Resistant Rubber Wash Hoses

#### - 2-Wire Wrapped -

**Black, “Wrapped Cover” Hoses** that feature an additional “Special Polyethylene Coating” for maximum wear and abrasion resistance. Coating is impregnated into the outer cover for maximum life under the most extreme use. 3/8” I.D. with 3/8” MPT solid fitting on each end and one hose bend restrictor. Rated to 6000 PSI and 250° F.



#### HIGH ABRASION-RESISTANT

Part No.	Length	Max. PSI	Wt.
GA 5RM-25	3/8" x 25', 2-Wire	6000	8 lbs.
GA 5RM-50	3/8" x 50', 2-Wire	6000	14 lbs.
GA 5RM-75	3/8" x 75', 2-Wire	6000	22 lbs.
GA 5RM-100	3/8" x 100', 2-Wire	6000	29 lbs.

Please remember there are No Returns on customer specified cut lengths of hose.