




High Quality Plunger Pumps from *General Pumps*. Ideal for use in Car Wash, Truck Wash, Pressure Wash, Industrial Cleaning and more. Brass or nickel-plated brass manifolds, (*stainless shown on a few models*). Ceramic plungers. Inlet pressures to 125 PSI. All pumps are rated to 165° F., but higher temperature seals are available in many models



CW2040



TS1011

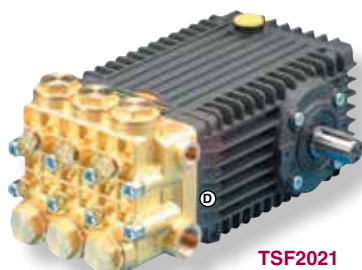

TSF2021



5/8" Shaft



ES2212S

Part No.	Interpump (Cross-Ref)	GPM	PSI	RPM	Shaft	Wt. Lbs.
IP TT9111	-	3.0	1500	1750	24mm	11
IP EP1810S17	-	3.4	2500	1750	24mm	15
IP TS1711B	WS171	3.5	2700	1450	24mm	32
IP ETB1811S17	-	3.7	2300	1750	24mm	11
IP ES2010S	-	3.9	4000	1750	24mm	21
IP EP1812S17	-	4.0	2500	1750	24mm	15
P EP1313S34	-	4.0	4000	3400	24mm	15
IP CW2004	-	4.0	2000	1750	24mm	30
IP CW2040	-	4.0	2000	1000	24mm	30
IP TS1011B	WS101	4.0	2000	1450	24mm	32
IP TS2012SS	* -	4.0	3000	1750	24mm	3
IP TS1511B	WS151	4.0	3500	1450	24mm	32
IP T9281B	** W928	4.0	4000	1750	24mm	32
IP EP1813S17	-	4.2	2900	1750	24mm	15
IP EZ3042S	-	4.2	3000	1750	24mm	18
IP T9211B	** W921	4.2	3000	1750	24mm	32
IP TSP1619	-	4.3	5800	1750	24mm	52
IP TSP1621	-	4.3	6500	1450	24mm	52
IP T1011B	W101	4.5	2000	1125	24mm	32
IP TS1021B	WS102	4.5	3500	1125	24mm	32
IP TS1321B	WS132	4.7	2100	1450	24mm	32
IP TS2011B	** WS201	4.7	2300	1750	24mm	32
IP ES2212S	-	4.7	3000	1450	24mm	21
IP ES2012S	-	4.7	4000	1750	24mm	21
IP T921B	W92	5.0	1700	1050	24mm	32
IP T1621B	W162	5.0	2500	1050	24mm	32
IP CW3040	-	5.0	3000	1250	24mm	30
IP TSP1819	-	5.0	5100	1450	24mm	52
IP T1321B	W132	5.5	2100	1150	24mm	32
IP TS2212SS	* -	5.5	2200	1750	24mm	31
IP ES2213S	-	5.5	3000	1450	24mm	21
IP ES2013S	-	5.5	3600	1750	24mm	21
IP TS2021B	** WS202	5.6	3500	1450	24mm	32
IP TSF1819	-	6.3	4350	1750	24mm	41
IP TSF2019	-	7.6	4000	1750	24mm	41
IP TS1531	WS153	7.9	2175	1450	35mm	46
IP TS1041B	WS104	8.0	1600	1450	35mm	46
IP TSF2021	-	8.5	3600	1750	24mm	41
IP CW1012	-	10	1200	750	35mm	51
IP TSF2221	-	10	3000	1750	24mm	41
IP TSF2221SS	* -	10	3000	1750	24mm	42
IP TSF2421	-	12	2500	1750	24mm	41

* 316 Stainless Manifold. ** Nickel-Plated Brass Manifold.

Ready Made Pump Units for 5/8" Shaft, 56C Electric Motors

(Includes Pump, Unloader, Pop-off valve, Garden Hose Inlet, Thermal valve, Bypass hose.)

Part No.	Max GPM	Max PSI	Max RPM	Shaft	Required * Motor	Wt./Lbs.
IP PMRET1509E17	2.1	2600	1750	5/8	1-1/2 to 4hp	14
IP PMRET1809E17	3.2	2300	1750	5/8	2-5hp	14
IP PMRET1505E34	2.1	2600	3400	5/8	1-1/2 to 4hp	14
IP PMRET1507E34	3.2	2600	3400	5/8	2-5hp	14

* Horsepower is dependent on flow and pressure required

General Pump Oil - Industrial Grade

Specially blended, non-detergent pump oil for General Plunger Pumps. Increases pump life and performance.

Series 100, 30 wt. Oil is for smaller General Pumps up to size T61B. Available in 16 oz. bottles or 2-1/2 gallon jugs.

Series 200, 50 wt. Oil is for Large General Plunger Pumps such as T61B and larger. Available in 16 oz. bottles or 2-1/2 gallon jugs.



Part No.	Oil Type	Pkg.	Std. *Pkg.
IP 100214-1	30 wt.	16 oz.	24
IP 100553-1	30 wt.	2-1/2 gallon	2
IP 100016-1	50 wt.	16 oz.	6
IP 100450	50 wt.	2-1/2 gallon	2
IP 100735-1	90 wt.	2-1/2 gallon	2

*10% Discount If Ordered In Std. Pkgs.

