


## Parker Push-Lok Hose



**Push-Lok Plus Hose** from Parker. Premium, leak-free, hose solutions to your low pressure plumbing needs. Easy-to-assemble, no clamps or special tools needed. Ideal for liquids and air. Internal tube is resistant to petroleum based oils. Outer cover has excellent flexibility and abrasion resistance. Stock color is blue, but (5) other colors are available if ordered in full reels. Reusable, brass push-lok fittings are shown elsewhere in this catalog. Sold by the foot or in reels at additional discount. Rated to 158° F. on air or 185° F. on water solutions. **Cut Lengths in 5' Increments.**

Inner Liner is an extruded, synthetic rubber, making it resistant to petroleum-based oil, air & water.

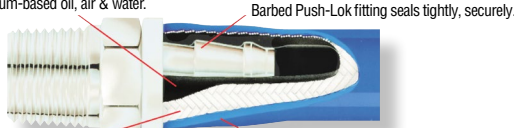

Barbed Push-Lok fitting seals tightly, securely.

Fiber braid reinforcement layer is impregnated with synthetic rubber for added durability.

High-Quality elastomer cover - lively feel, excellent flexibility & resistance to abrasion.

Part No.		I.D. Size	O.D. Size	Max. PSI	* Std. Pkg.
PA 801-4BL	Blue Push-Lok Hose	1/4"	.50"	350	600'
PA 801-6BL	Blue Push-Lok Hose	3/8"	.63"	350	450'
PA 801-8BL	Blue Push-Lok Hose	1/2"	.78"	300	300'
PA 801-12BL	Blue Push-Lok Hose	3/4"	1.03"	300	200'
PA 801-16BL	Blue Push-Lok Hose	1"	1.28"	200	200'

**\* 25% Discount for Full Reel Purchase.**  
I.E. 3/8" Full Reel at Less 10% Per Foot.

## Gates Push-Lok Hose

**Gates Lock-On Hose** for use with Push-lock barb fittings. No clamps required. Designed for air, water, soap solutions.



3222

Maximum pressures to 300 PSI. Temperatures to 212° F. (for applications exceeding 160° F. clamps should be used). Vacuum rating to 30" Hg. Nitrile tube and cover have high oil resistance. Standard color is blue. **Note:** These hoses are not recommended for applications where vibration or pressure surges exist. **Cut Lengths in 5' Increments.**

Part No.	I.D.	O.D.	Color	* Std. Pkg.	Wt. per 100'
GA 3222BL-1/4	1/4"	.49"	Blue	500'-700'	8 lbs.
GA 3222BL-3/8	3/8"	.63"	Blue	500'-700'	12 lbs.
GA 3222BL-1/2	1/2"	.77"	Blue	500'-700'	15 lbs.

**\* Less 25% on Standard Package Purchase**

## ALFAGOMMA® Alfagomma Steam Hose Kuriyama

The **Alfagomma T340 Series** from Kuriyama is a general steam transfer hose that is rated up to 270PSI and 410°F. Designed for transfer of saturated steam. This hose series has a black (available in red T340AH) EPDM heat-resistant, wrapped cover. The cover is pin-pricked to allow for venting. Not recommended for washdown applications where detergents or oils are present. General use steam hose used in superheated steam will shorten hose life. For superheated steam applications, see T341 (Chlorobutyl) Series. Proper draining after each use will increase service life. Available in Black/Red Covers for both T340 and T341 Series. Not all sizes/covering options shown - *Call for Details.* Factory Premade Assemblies Available - *Call for Details.*



**Working Pressure:** 270PSI Max

**Temperature:** 410°F Max

**Cover:** Heat-resistant EPDM, Pin-Pricked

**Tube:** Extruded heat resistant EPDM (T340)/heat-resistant Chlorobutyl (T341)

**Reinforcement:** Wire Braid

\*Not for Steam Cleaner Use

**\*\*WARNING - Handling steam is extremely hazardous. If it is not properly controlled it can cause property damage, injury or even death. Selection for the proper application, usage, and maintenance will not only increase hose life but will ensure safe operation for the user.\*\***

Part No.	Size	Color	Bend Radius	Wire	Discount
TF T340AA-1/2†	1/2"	Black	5"	Single	-
TF T340AA-3/4	3/4"	Black	7-1/2"	Single	25% - 100'
TF T340AA-1	1"	Black	10"	Two	25% - 100'
TF T341AH-1-1/4*†	1-1/4"	Red	12-1/2"	Two	-
TF T341AH-1-1/2*†	1-1/2"	Red	15"	Two	-
TF T340AA-2†	2"	Black	20"	Two	-
TF T340AA-3†	3"	Black	30"	Two	-


\* T341 Rated for superheated steam applications (Chlorobutyl Tube)

† Sold in 100' RL Only

**Please remember there are No Returns on customer specified cut lengths of hose.**

## Kanaflex® Air Seeder Hose

**Flexible Polyurethane Lined PVC Hose** for air seeders, abrasive material vacuum systems and industrial vac equipment. Smooth bore, PVC corrugated OD. Lightweight and flexible in cold temperatures to -13° F. Clear with red or black helix. The urethane lined tube provides abrasion-resistance, visual check of material flow and prevents material build up. Banding coils and CW spiral clamps are available for end connections.



Inside Dia. Inches	Outside Dia. Inches	Pitch Inches	Minimum Bend Radius 72°F, Inches	Working Pressure 72°F, P.S.I.	Vacuum Rating 72°F, In Hg	Weight Lbs/Ft	Standard Length Ft
2	2.36	0.39	3.0	40	29.8	0.50	100
2 1/2	2.87	0.53	5.0	35	29.8	0.71	100
3	3.50	0.59	6.0	35	29.8	1.00	100

Part No.	Helix Color	I.D.	Wt. Lbs.	Std. O.D.	Pkg.
KA 100UCLRD-2	Red	2"	2.36"	0.50	100
KA 100UCLRD-212	Red	2-1/2"	2.87"	0.71	100
KA 100UCLRD-3	Red	3"	3.50"	1.00	100
KA 100UCLBK-212	Black	2-1/2"	2.87"	0.71	100

\* Black 2" & 3" Require Minimum Buy of 3000'

**— No Cut Lengths - Full Reels Only —**

**- See Also UF1 on Adjacent Page for Other Sizes -**

## Contractor Duty Garden Hoses

Premium-grade, washdown garden hoses. Rubber construction. Abrasion, Ozone and kink resistant. Extreme flexibility even at low temperatures. Chrome-plated brass GHT garden hose fittings and bend restrictor protectors on each end. Available in 50ft and 100ft lengths. 500 PSI burst pressure. Rated to 180° F.



4-Finger grip bend restrictor

Solid brass fittings that are superior to aircraft aluminum fittings

Flexibility in extreme conditions from -40°F to +180°F


Handles hot & cold water

Ozone resistant

High-strength polyester braided reinforcement

Part No.	Size	GPM @ 65 PSI	Wt.
EV PGH50	5/8" x 50ft	11.90	9 lbs.
EV PGH100	5/8" x 100ft	11.90	17 lbs.
EV CWH50	3/4" x 50ft	17.10	18 lbs.
EV CWH100	3/4" x 100ft	17.10	35 lbs.

## Parker Steam Hose



7263

**PARKER Steam Hose** for long lasting service with saturated and superheated steam. EPDM tube and wire braid reinforcement for crush resistant durability, kink resistance and static electrical charge to ground.

Black EPDM cover is resistant to abrasion, cracking, hardening and ozone. Rated from -20° F. to +406° F. with saturated steam and +450° F. with superheated steam. Maximum 250 PSI. **\* Some sizes sold by the foot - others require full RL purchase. Those sold by the foot are sold in 5ft minimum increments. Use with Dixon Boss fittings for assembly in the field.**

Part No.	I.D.	Couplings	Wts. Per Foot
PA 7263-752	3/4"	Dixon Boss	.66 lbs
PA 7263-1002	1"	Dixon Boss	.85 lbs
PA 7263E-1502*	1-1/2"	Dixon Boss	1.44 lbs
PA 7263E-2002*	2"	Dixon Boss	1.76 lbs

**\* Full RL Only**