



## Portable Garden Hose Reels

**High Quality, Industrial Grade**



**High, Quality Industrial Grade Garden Hose Reels** from *Hannay Reels*. Ideal for grounds maintenance, construction sites, restaurants, hotels and plant wash down. All steel construction. Swivels are plated brass. Camlock break, one-piece foot and removable handle bar are standard features. Rated to temperatures to 250° F. and pressures to 1000 PSI if needed.

**GHAT1100** is designed for 5/8" garden hose and features 8" solid rubber tires. Includes 5' GHT inlet hose.

**GHAT1200** is designed for either 5/8" or 3/4" garden hose and features 10" pneumatic tires. Includes 5' GHT inlet hose.

**AT1200** includes 1" FPT swivel inlet and features 10" pneumatic tires. Rated to 2,000 PSI. *(No inlet hose included).*



Part No.	Capacity	Wt.
HN GHAT1100	125' of 5/8" I.D. GHT Hose.....	47 lbs.
HN GHAT1200	250' of 5/8" or 150' of 3/4" GHT Hose	86 lbs.
HN AT1200	250' of 5/8" or 150' of 3/4" Hose	86 lbs.



## Spring Rewind Garden Center Reel

**Reelcraft Spring Rewind Reel** is designed to be centrally located for watering and washdown applications in garden centers, garages, shops, etc. Industrial grade steel construction features powder-coated, corrosion-resistant red or white finish as shown. Guide arm is adjustable for a variety of positions. Includes bumper stop and hose. Hoses are standard with 3/4" Male garden hose fittings. Rated to 250 PSI and 150° F.




Part No.	Color	Hose	Wt.
RQ 7850OLPSW57	Red	1/2" x 50'	51 lbs.



## Garden Hose Reel

**Low Pressure Hose Reel** for garden hoses. One piece welded drum with durable powder-coated finish. Pedestal allows for mounting on floor or wall. Standard with brass swivel and 6" x 5/8" feed hose. Rated to 150 PSI. Capacity is 150' of 5/8" hose *(not included)*. Inlet and outlet are 3/4" FHT.

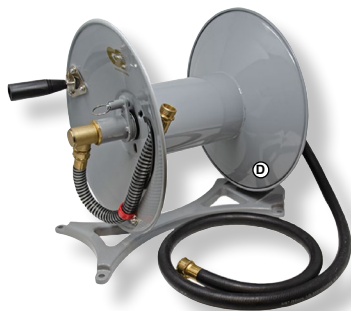

Part No.	Capacity	Wt.
IP DHRGH150	5/8" x 150'	22 lbs.



## Portable Garden Hose Reels



**Portable Garden and Landscape Reels** from *Reelcraft*. An ideal choice for golf courses, athletic fields, parks, resorts, hotels and plant wash down. All reels feature abrasion-resistant powder coat finish, heavy steel construction, 1" square tube handles, 8-3/4" pneumatic tires, sealed ball bearings on axles and 10' of inlet feeder hose. Rated to 300 PSI and 250° F. Standard color is red.

**600965** will handle up to 200' of 1/2" I.D. garden hose. Weight is 78 lbs.

**600968** will handle up to 100' of 1" I.D. garden hose. Weight is 94 lbs.

Part No.	Capacity	Wt.
RF 600965	200' of 1/2" I.D. Hose.....	78 lbs.
RF 600968	100' of 1" I.D. Hose.....	94 lbs.

## Enclosed Air Reel

### Standard Features:

- Allows for 50' of Capacity
- Hose Inlet/Outlet is 3/8"
- Working Pressure of 300 PSI
- Advanced Auto Stop & Automatic Guide System
- Hose Can Be Stopped at Any Point & a Controlled Return Allows the Hose to Safely Guide Back Into the Enclosed Housing
- Compatible with Air or Water
- Bracket Allows for 180° of Swivel
- 3/8" x 50' of Hose Included



Part No.	Description
NS 1459NS	3/8" x 50' Enclosed Hose Reel, Spring Return .....

