



Stainless Rinsing Nozzle

For Tank Cleaning Applications, this rinse nozzle has three orifices which create rotational forces to provide spherical coverage. 316 stainless. Internal Teflon sleeve. 1/2" FPT connection. Requires 1-1/32" tank opening. Maximum pressure is 200 PSI.

| Nozzle No. | Capacity Gallons Per Minute | | | | |
|------------|-----------------------------|--------|--------|--------|--------|
| | 20 psi | 30 psi | 40 psi | 50 psi | 60 psi |
| 23240-7 | 4.9 | 6.1 | 7.0 | 7.8 | 8.6 |

Part No.
SS 23240-7


G Tank Cleaning Nozzles

Designed for cleaning of tanks, barrels and drums. Nozzles spin as main body rotates giving complete orbital coverage to interior surfaces. Rotating bodies are driven by electric or pneumatic motors or are self-propelled and driven by the water flow. Stainless steel construction with built-in filters. (2) or (4) nozzles are included but must be matched to your flow and pressure requirements. Rate to 195° F. **Note:** Flow and pressure required for correct sizing as well as tank diameter and any chemicals that may be used.

M21 Nozzle is rated to 5.5 GPM at up to 3200 PSI. Minimum tank opening is 2-1/2". Electric 110 volt motor is the only drive available for this model. Length is 39". Weight is 7 lbs.

M63 Nozzles are rated from 4 to 6.5 GPM and 450 to 2000 PSI. Minimum tank opening is 3-1/4". Self-propelled, 24 volt electric or pneumatic drives are available. Inlet is 3/4" on self-propelled and 3/8" on electric and air models. Length is 48-1/2". Weight is 14 lbs.

M85 Nozzles are rated from 6 to 21 GPM and 450 to 2000 PSI. Minimum tank opening is 6". Self-propelled, 24 volt or pneumatic drives are available. Inlet is 3/4" on self-propelled and 3/8" on electric and air models. Length is 51". Weight is 14 lbs.

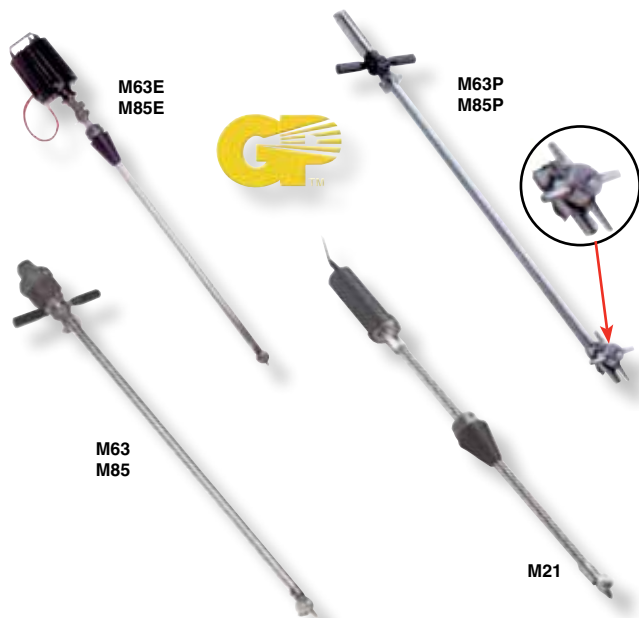

| Part No. | Drive | Capacity |
|----------|----------------|---------------|
| IP M21 | 110V Electric | 1.0 - 5.5 GPM |
| IP M63E | 24V Electric | 4 - 6.5 GPM |
| IP M63P | Pneumatic | 4 - 6.5 GPM |
| IP M63 | Self-Propelled | 4 - 6.5 GPM |
| IP M85E | 24V Electric | 6 - 21 GPM |
| IP M85P | Pneumatic | 6 - 21 GPM |
| IP M85 | Self-Propelled | 6 - 21 GPM |

Rotary Tank Washing Nozzles

1/2" or 3/4"

A new dimension of performance and versatility in low pressure cleaning/rinsing applications. Cleans diameters to 10'. Requires 2-1/4" tank opening.

Two-piece nozzle features a spray head that is rotated by the pressurized flow of the spray solution. Can be operated at pressures of 10 PSI to 50 PSI.

The multiple orifice configuration of the spray head provides exceptional coverage. 360° coverage. 1/2" Rated to 12 GPM @ 50 PSI. 3/4" Rated to 20 GPM @ 50 PSI.



Part No.
SS 55270-1/2-11 1/2" Rotary Nozzle.....
SS 55270-3/4-18 3/4" Rotary Nozzle.....



Ball Type Nylon Rinsing Nozzles

These nozzles are designed to rinse the inside of chemical containers. Nozzles are standard with 40 orifices that have a total spray angle of 240°. Construction is Nylon. Ports are 1/2" FPT or 3/4" FPT. Fixed spray pattern, no rotation. 1/2" Size requires 1-3/16" tank opening, 3/4" size needs 2" Opening.

| Part No. | Ports | Flow Rate @ 100 PSI |
|------------|----------|---------------------|
| SS VSM-28 | 1/2" FPT | 8.7 GPM |
| SS VSM-44 | 1/2" FPT | 13.7 GPM |
| SS VSM-90 | 3/4" FPT | 28 GPM |
| SS VSM-140 | 3/4" FPT | 43 GPM |
| SS VSM-190 | 3/4" FPT | 59 GPM |

Tank Cleaner

Self operated by the cleaning water. A fast and effective method of cleaning the interior of any sprayer tank. Requires 2-5/8" tank opening.

Jets rotating about a horizontal axis. Cover up to a 20' Diameter area. Material is Nylon. Inlet connection is 1" MPT. 3.0 GPM at 50 PSI.

Part No.
DU 1LTC



Jet Rinse

Jet Rinse is an easy-to-use way of rinsing chemical containers.

The importance of rinsing the chemical container is to permit total usage of the chemical and also the safety factor involved with chemicals left in the container. Many landfills and salvage yards will not accept empty chemical containers that have not been properly rinsed.

Features: Cleans Container of All Chemicals • Can Be Used with Plastic or Metal • Triple Rinse in less than One Minute • Chemicals Saved Pay for Jet Rinse • Easy-To-Use • Small, Convenient, 10" Long • Inlet Connection is 3/4" FGHT.

How Does It Work? Simply attach a garden hose or a hose from the nurse tank to Jet Rinse and inject the device into the bottom or side of the container, you will completely and thoroughly clean the inside of the container through a jet rinsing procedure. This process will also leave a hole in the container, limiting reuse of the container for other purposes. Jet Rinse can be used on 1-gallon, 2.5 gallon and 5 gallon containers, metal or plastic.

Part No.
DU JR24 Jet Rinse

