

## OPDQ Cylinder Valves for Vapor Withdrawal

Also Available for 5 lb. & 10 lb. Cylinders

- Integral Safety Relief Valve Start-to-Discharge is 375 PSIG.
- Backcheck Prevents Propane from flowing until connected.
- Fixed Maximum Liquid Level Gauge.
- Float at Bottom Prevents Overfilling.
- Screwdriver Vent Screw.

**Part No.**

ST PVE402	20# Cylinders.....
ST PVE404	30# Cylinders.....
ST PVE406	40# Cylinders.....
ST M392	FM Acme POL Adapter.

## Appliance End Fitting for OPDQ Cylinder Valves

- Allows LPG Hook Ups without the use of a wrench.
- Attaches directly to the new style OPDQ Cylinder Valves.
- Replaces the older style male POL fitting.
- 1/4" MPT



**Part No.**  
ST G1855-A03 Appliance End Fitting

## Cylinder & Tank Filling Valves

- AL343P:** 1" Hose End Valve. 100 GPM @ 10 psi. UL listed for LPG/NH3. Steel with 1-3/4" ACME extension.
- L424A:** is a lighter weight version for 3/4" hose. Steel with 1-3/4" ACME extension.
- L423:** A 3/4" cylinder filling valve with QCC connection. For filling new style 20, 30 and 40 lb. cylinders.



AL343AS



L423

**Part No.**

ST AL343AS	1" Hose End Valve .....
ST L424A	3/4" Hose End Valve .....
ST L423	3/4" Cylinder Valve, QCC Female


## Service Valves



These **Service Valves** provides vapor or liquid withdrawal service on DOT or ASME containers that have a separate safety relief valve.

Valve	Description	Excess Flow Valve Closing Flow
C600H	3/4 MNPT X FPOL	-
C630-33	3/4 MNPT X 3/8 SAE Flare (90°)	3.3 GPM
C631-33	3/4 MNPT X 3/8 SAE Flare (70°)	3.3 GPM
C632-26	3/4 MNPT X 3/8 MNPT	1.5 GPM

## Multiple Head Units

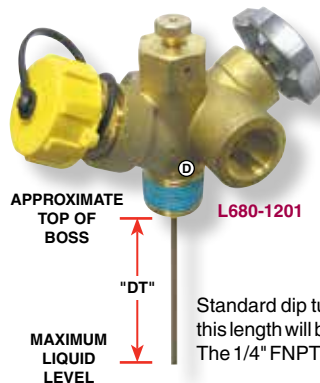

**Type L680-1201** incorporates a service valve, a vapor equalizing valve, a fixed liquid level gauge, and a connection for a pressure gauge. They are intended for use in ASME domestic bulk tanks in combination with separate filler, safety relief, and liquid withdrawal valves.

Standard dip tube length ("*DT*" dimension) is 12" and this length will be furnished unless otherwise specified. The 1/4" FNPT pressure gauge connection is plugged.

### ComboValve®


CONTAINER CONNECTION	VAPOR LINE CONNECTION#	VAPOR SERVICE CONNECTION	TYPE NUMBER	GAUGE BOSS	FIXED LIQUID LEVEL GAUGE
3/4" FNPT	1-1/4" M. Acme	F.POL	L680-1201	1/4" FNPT Tapped & Plugged	Yes

<b>LP GAS EQUIPMENT PRICING</b>	<b>Part No.</b>
	ST C600H.....
	ST C630-33 .....
	ST C631-33 .....
	ST C632-26 .....
	ST L680-1201....

## Multi-Purpose Valve For On-Site Filling

### FEATURES:

- For on-site filling of DOT cylinders up to 200 lbs.
- Includes a service valve, pressure relief valve, back check filler valve & fixed maximum liquid level gauge.
- Filler connection: 1-3/4" Acme thread
- Inlet: 3/4"
- Outlet: POL

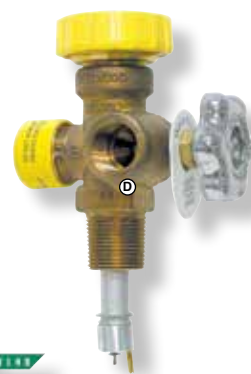

**Part No.**  
ST 2030BC Cylinder Valve

