

# Hitches • Shrink Wrap



## Standard Draw Bars

**Standard Draw Bars** for 2" x 2" receivers. Construction is painted steel. Rated to 5,000, 6,000 and 12,000 lb. gross trailer weight and 500 lb. tongue weight. Hitch ball hole size is 1".



Part No.	Gross Trailer Wt.
RC 21343 Drawbar, 10" long x 2" drop .....	6000 lbs.
* 1200 lb. Tongue Weight.	

## Solid Coupler Balls

**Chrome Plated Solid Steel Hitch Balls**



**6391C:** 2" Coupler Ball. 5000 Lb. Capacity, SAE Class 3. Chrome Plated.

Part No.	Ball Dia.	Bolt Size
DN 6391C	2"	1"

## Shrink Wrap/Stretch Wrap Film

**Shrink Wrap** is ideal for securing boxes and containers for shipment. Each layer sticks to the next for a tight, secure wrap. Available in 3" wide or 17" wide rolls. Dispenser handles and inserts are designed to speed the packaging process and protect hands and fingers.



Part No.		* Std. Pkg.
OE 3120	3" x 700' x 120 Gauge Wrap .....	18
OE SLCPF17	17" x 1500' x 80 Gauge Wrap .....	4
OE 3HAN	Dispenser Handle, 3" Wrap .....	-
OE D800	Dispenser Handle, 17" Wrap .....	-
OE D801	Hand Inserts, Set of 2 .....	-

**\* 5% Discount for Standard Package Purchase**


## BESTWAY SHIPPING

"BestWay" shipping may not be the quickest option, but it will help to lower your freight bill. If you select this method of shipping, Dultmeier will calculate the cheapest way to ship your package(s) at the time of shipment.

## Schuck Cushion Hitches

**40,000 Lbs. Shock Load Capacity**

Why Not Springs? Unlike urethane, every spring is built to a predetermined load. When that is insufficient or exceeded, the spring does not function properly. They either do not work at all or they bottom out. Urethane (*Rubber*) in the initial stages will cushion the lightest of loads yet in the final stage of compression will feather out the heavier loads.

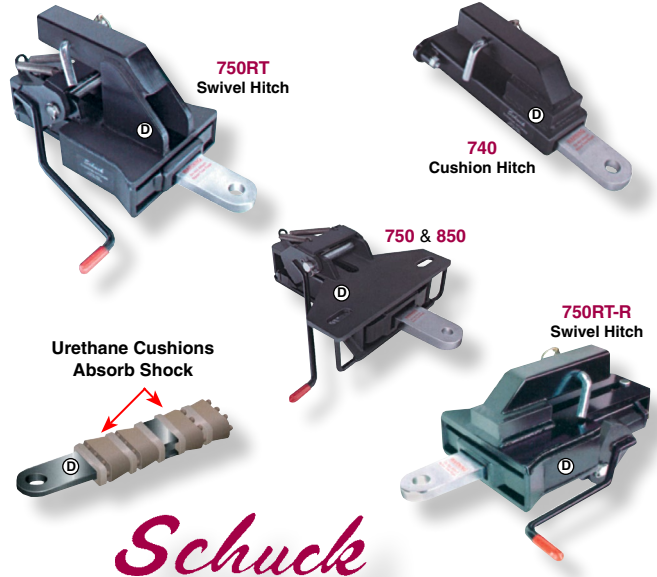

No.	MODEL	APPLICATIONS:
740	Cushion Hitch	for standard 2" receiver tube. Includes pin. Tongue load is 1000 Lbs.
750	Telescoping Swivel Hitch	for 1-Ton Pickups. Lever release allows the tongue to be extended up to 7" or swiveled 60° laterally for easy hookup. For secure rattle-free automatic lock-up, simply back into the load. Mounting holes 11" center to center. Tongue load capacity is 1000 Lbs.
850	Telescoping Swivel Hitch	for 2-Ton Truck. Similar to the 750 Hitch, but has a 2000 Lb. tongue capacity.
750RT	Telescoping Swivel Hitch	for standard 2" receiver tube. Center of receiver tube to top of hitch tongue is a 5-1/2" drop. Tongue load is 1000 lbs. Note: includes pin
750RT-R	Telescoping Swivel Hitch	for standard 2" receiver tube. Center of receiver tube to top of hitch tongue is a 3-1/2" drop. Tongue load is 1000 lbs. Note: Includes pin

Part No.	CUSHION HITCHES	Tongue Load Capacity	Wt.
SH 720DODGE	Bolt-On Hitch - Dodge Pickups ..	1000 Lbs.	29 lbs.
SH 740	Receiver Tube.....	1000 Lbs.	31 lbs.
	Telescoping Swivel Hitch.....	1000 Lbs.	61 lbs.
SH 850	Telescoping Swivel Hitch.....	2000 Lbs.	107 lbs.
SH 750RT	Receiver Tube Telescope Swivel Hitch	1000 Lbs.	64 lbs.
SH 750RT-R	Receiver Tube Telescope Swivel Hitch	1000 Lbs.	64 lbs.

## Quick-Lock Coupler



**Quick-Lock Coupler** is precision die formed, easily and quickly unlocked by light thumb pressure on the safety lever, snaps shut in an instant, and cannot unlock by itself.

**A-Frame 990P3N**

Part No.	Housing Width I.D.	O.D.	For Ball Size	SAE Class	For Trailer Gross Wt.
DN 990P3N	50° Angle		2"	3	To 5000 lbs.