

Tow/Recovery Straps

- Designed to Stretch
- Treated to Prevent Mildew
- Polyester Webbing
- Resists Abrasion

Heavy-Duty Tow Straps are made of the finest polyester webbing. Designed to stretch to reduce shock loads. Specially treated to prevent mildew and dry rot. Resists abrasion. Standard with added wear protection on all loops. Loop x loop ends are standard on all straps except on **TS1225H** which features forged hooks on each end. Capacities shown are straight pull, maximum breaking strength.



Part No.	Width x Length	** MBS Capacity
SQ TS625	2" x 25'	6,000 lbs.
SQ TS1225H	2" x 25'	* 12,000 lbs.
SQ TS1225	2" x 25'	12,000 lbs.
SQ TS1824	3" x 24'	18,000 lbs.
SQ TS2430	3" x 30'	24,000 lbs.
SQ RS3230	4" x 30'	32,000 lbs.
SQ RS4830	6" x 30'	48,000 lbs.
SQ RS8230	6" x 30'	82,000 lbs.
SQ RS8250	6" x 50'	82,000 lbs.

* Forged hooks both ends on this model.
 ** Maximum breaking strength.



Pavement/Air Temperature Measuring System

Warns You When The Road Ahead May Be Freezing!

Road Watch Bullet™ should be a vital part of your anti-icing & de-icing program. It constantly displays both the air and pavement surface temperature in "real time". This allows you to apply salt and chemicals at the best rates for the conditions and make your rate changes on the go. Uses non-contact infrared technology. "Caution" light activates at 35° F. Road temp range : -10° to 200° F. Air temperature range: -40° to 150° F. 12VDC. Illuminated LED digital display. Accuracy: 2° F. Includes exterior "western" mirror mount infrared sensor with clamp, 2" diameter in-cab display and 12' shielded cable. Many options available.



The RoadWatch LED Display



The RoadWatch Sensor easily mounts on any "western" mirror brackets. Mountings for other vehicle mirrors are also available.



Part No.	
VE RWSS	RoadWatch Bullet™ System
VE 849-1242-000	RoadWatch Sensor with 12' Cable Less Display
VE 849-1243-000	Sensor Only; Less Cable

Rubber Tie-Down Bungee Cords



Heavy Duty Rubber Tie-Downs are supplied with a 3" -"S" Hook installed in each end. Holes are punched for 1/4" bolts.

RRH Rubber Rope Hooks should be used with bulk rubber rope to create custom length tie-downs. Hooks are made of stainless steel.



Part No.	LENGTH (With Hooks)	STD. Pkg. Wt.	Pkg. Wt.	STD.PKG. Discount
LN 1014S	10"	50	16 lbs.	20%
LN 1519S	15"	50	21 lbs.	20%
LN 2024S	20"	50	25 lbs.	20%
LN 3034S	30"	50	43 lbs.	20%

Equipment Jacks


5,000 Lb. Capacity

Agricultural jacks are supplied with a 2-1/32" I.D. mounting. The 5/8" hitch pin with chain and ball retention and one mounting bracket are included.

Standard Mounting Tube
 (Included but Not Sold Separately)



LESS 5% On 10+ of One Size

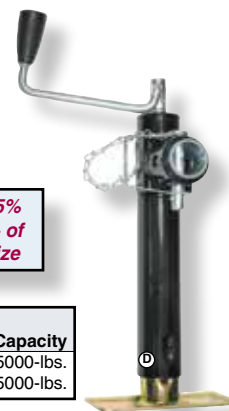

SJ-NO.	Mounting To Base		Total Lift	Tube	Capacity
	Retracted	Extended			
TM10	11"	21"	10"	2-1/4"	5000-lbs.
TM15	16"	31"	15"	2-1/4"	5000-lbs.

Top Crank Tube Mount	Part No.	Jack with Bracket	Wt.
	SJ TM10	Jack with Bracket	16 lbs.
	SJ TM15	Jack with Bracket	17 lbs.

Specific Gravity Salimeters

Salimeters for measuring the concentration of salt brine. Manufactured and calibrated in accordance with NIST Circular 555 and ASTM E100-81. Based on 60° F. liquid temperature.



Part No.	Division	Length	Percentage Range
FS 11605	1%	12"	0-100% Saturation
FS 11606	0.5%	12"	0-26.4% Salt

