


Trigger Wand & Hose Assemblies

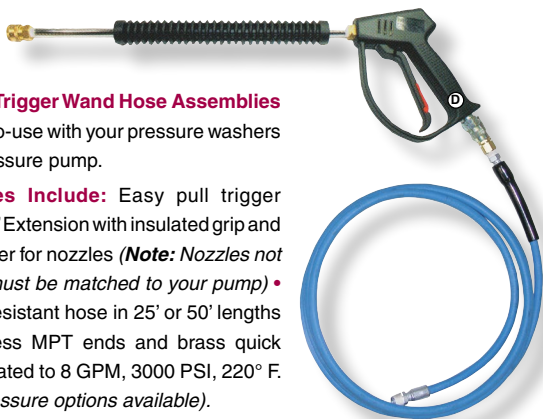

Complete Trigger Wand Hose Assemblies

are ready-to-use with your pressure washers or high pressure pump.

Assemblies Include: Easy pull trigger handle • 36" Extension with insulated grip and quick coupler for nozzles (*Note: Nozzles not included, must be matched to your pump*) • Abrasion-resistant hose in 25' or 50' lengths with stainless MPT ends and brass quick coupler • Rated to 8 GPM, 3000 PSI, 220° F. (*Higher pressure options available*).

Part No.

DU TR25WH	Trigger Wand Package with 25' Hose, 3,000 PSI, Weight is 7 lbs.
DU TR50WH	Trigger Wand Package with 50' Hose, 3,000 PSI, Weight is 11 lbs.
SS QCMEGxxx	Quick Connect Nozzle Matched To Your Pump

Galvanized Wand Extensions



Spray Gun Extensions in Galvanized Steel construction. These uninsulated wands are available in sizes from 18" to 72" long. Rated to 3000 PSI and 250° F. Ports are 1/4" MPT inlet and 1/4" MPT x 1/8" FPT outlet for 1/8" MPT or 1/4" FPT nozzles.

Part No. Length

BC 1/4G-18	Uninsulated Wand	18"
BC 1/4G-24	Uninsulated Wand	24"
BC 1/4G-27	Uninsulated Wand	27"
BC 1/4G-36	Uninsulated Wand	36"
BC 1/4G-48	Uninsulated Wand	48"
BC 1/4G-60	Uninsulated Wand	60"

Galvanized Steel Pipe Extensions with Insulated Grips



For High Pressure Service. With a 1/4" MPT thread on one end and a 1/8" FPT thread on the other end. Wand fits the 1/4" FPT outlet on hand spray guns. Available in 18" through 48" lengths with a molded GRIP, 6" long. The 36" & 48" lengths have a molded GRIP, 11" long. Pressures to 3000 PSI and Temperatures to 250° F. maximum.

Stainless Steel Wand Extensions

Stainless Steel Wand Barrels are available either insulated or uninsulated. Sizes range from 18" to 84" lengths. All models feature 1/4" MPT inlet and outlet except for #1/4S-18 which has 1/8" FPT outlet and #21762 which has a built-in nozzle protector with 1/4" FPT outlet. Maximum pressures vary from 3000 to 7250 PSI. Maximum temperature to 300° F.



Part No.	Length	Grip	Max. PSI	Max. Temp.
GU 21733	12" Straight	No	7250	300° F.
GU 21734	15" Straight	No	7250	300° F.
BC 1/4S-18	* 18" Straight	No	3000	300° F.
GU 21735	24" Straight	No	7250	300° F.
GU 21743	24" Straight	Yes	7250	300° F.
GU 21736	36" Straight	No	7250	300° F.
GU 21744	36" Straight	Yes	7250	300° F.
NP ST002-36	36" Straight	Yes	6000	300° F.
GU 21762	36" Bent	Yes	4100	300° F.
GU 21737	48" Straight	No	7250	300° F.
GU 21745	48" Straight	Yes	7250	300° F.
NP ST002-48	47" Straight	Yes	6000	300° F.
NP ST002-48H	48" Straight	Yes	7300	300° F.
GU 21738	60" Straight	No	7250	300° F.
GU 21746	60" Straight	Yes	7250	300° F.
GU 21739	72" Straight	No	7250	300° F.
GU 21747	72" Straight	Yes	7250	300° F.
BC 140059	79" Straight	Yes	4100	300° F.
GU 21741	84" Straight	No	7250	300° F.
GU 21749	84" Straight	Yes	7250	300° F.

* 1/8" FPT Outlet for 1/8" Male Nozzles.

SUTTNER Plated Extensions

Wand Extensions With and Without Insulated Grips. Nickel plated steel tubing. Rated to 6000 PSI. Maximum temperature is 300° F.

These lance wands are available in 18", 24", 36" or 48" straight end style or 60" & 79" with 45° curved ends. Inlet and outlet are 1/4" MPT (*except for ST007-18MF*) and require either female nozzles or nozzle holder/protectors shown in this catalog.

ST003 Wand Only - No Grip



ST007 Bent Wand with Grip



Part No.	Extension	Length
NP ST007-18	Straight Wand with Grip	18"
NP ST007-18MF	* Straight Wand with Grip	18"
NP ST007-24	Straight Wand with Grip	24"
NP ST007-36	Straight Wand with Grip	36"
NP ST007-48	Straight Wand with Grip	47"
NP ST007-60S	Straight Wand with Grip	60"
NP ST007-60	Bent Wand with Grip	60"
NP ST007-79	Bent Wand with Grip	79"
NP ST003-18	Straight Wand, No Grip	18"
NP ST003-24	Straight Wand, No Grip	24"
NP ST003-36	Straight Wand, No Grip	36"
NP ST003-48	Straight Wand, No Grip	48"


* 1/8" Female Outlet for 1/8" Male Nozzles.

Double Barrel Extensions

Double Barrel Wand Extensions designed to be used with chemical injectors for downstream chemical injection. Side handle grip valve allows for easy change-over from high to low pressure which causes injector to pull soap when needed. Nozzle ports are 1/4" FPT. Inlet is 1/4" MPT. Ends are bent or straight as noted.

ST53 & ST54 are made by **Suttner** and have zinc plated or stainless barrels. **ST53** has knob control in place of the handle on **ST54**. Soap nozzle is included. Bent ends.

YDL are made by **General** and feature zinc plated or stainless steel barrels with handles like Model ST54. Straight or bent ends.

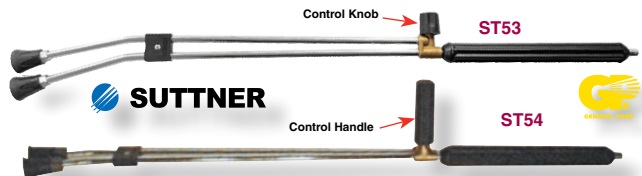

Part No.	Type	Length	Max. PSI
NP ST53	Plated Bent, Knob	38"	3600
NP ST532	Stainless Bent, Knob..	38"	5800
NP ST53-72	Plated Straight, Knob..	72"	3600
NP ST54	Plated Bent, Handle ...	38"	4500
NP ST542	Stainless Bent, Handle	38"	5800
NP ST54-48	Plated Bent, Handle ...	47"	4500
NP ST54-72	Plated Straight Handle	72"	4500
IP YDL41	Plated, Straight Handle	41"	3600
IP YDL41B	Plated Bent, Handle ...	41"	3600
IP YDL41SSB	Stainless Bent, Handle	41"	3600

Order from our entire inventory online!
Scan our QR Code dultmeier.com



- Current Pricing
- Web Specials
- Closeout Items
- Current Flyers
- Order Status
- Parts Schematics

