


**Trigger Guns**

Heavy-Duty design to withstand high impact and rough use. Smooth and easy to operate. Trigger lock retracts flush in handle. Stainless steel shut-off needle. Bronze-filled Teflon seat.

**Series 30:** Pressures to 1500 PSI, Maximum Temperature 200° F, Maximum Flow 5 GPM, Buna stem seal. Inlet is 1/4" FPT. Outlet is 1/4" FPT.  
**Series 60:** Pressures to 2500 PSI, Maximum Temperature - 300° F, Maximum flow is 6 GPM, Viton® stem seal. Inlet is 3/8" FPT. Outlet is 1/4" FPT.



| Part No.   | Seat                                | Inlet    | Outlet   | PSI  |
|------------|-------------------------------------|----------|----------|------|
| SS 30-1/4  | Zero Leak                           | 1/4" FPT | 1/4" FPT | 1500 |
| SS 60-3/8  | Zero Leak                           | 3/8" FPT | 1/4" FPT | 2500 |
| SS AB30KIT | Repair Kit for 30-1/4 GunJets ..... |          |          |      |
| SS AB60KIT | Repair Kit for 60-3/8 GunJets ..... |          |          |      |



**PW4000 Trigger Guns**

**Spraying Systems PW4000 Trigger Gun. Standard Features:** Bottom trigger pivot to reduce operator fatigue • Shut-off valve location designed to reduce heat build-up in handle • Packing screw accessible without separating handle halves • Handle is made of high strength polycarbonate construction.


**Specifications:** Inlet is 3/8" FPT • Outlet is 1/4" FPT • Maximum operating pressure is 4,000 PSI • Maximum operating temperature is 300° F. • Maximum flow rate is 10 GPM.



| Part No.   | Max. Flow | Max. Pressure |
|------------|-----------|---------------|
| SS PW4000A | 10 GPM    | 4000 PSI      |

**Break-Away Gun Fittings**

Mounts between hose and gun or between gun and extension, designed to break before damage to gun or wand. Available in 1/4" or 3/8". Rated to 4,000 PSI.



| Part No. |                |
|----------|----------------|
| AA 5068  | 1/4" MPT x FPT |
| AA 5069  | 3/8" MPT x FPT |

**Water Sandblast Kit**

**For Suction-Fed Injection of Sand Into the Water Stream for Abrasive Cleaning**

**Water Sandblast Kits** are designed for suction-fed injection of sand into downstream line of common pressure washers. Ideal for abrasive cleaning and removal of paint, rubber, metal scale and rust from a variety of surfaces. Rated from 1500 PSI to 5,000 PSI and 3 GPM to 10 GPM. Maximum temperature is 200° F. Kit includes sand nozzle, mixing head, nozzle holder, sand probe and 10' of supply hose.



**Note:** High pressure, zero degree nozzle is not included and must be matched to pressure washer flow and PSI. Can ship with kit but is billed separately.

| Part No.   | Flow Range     | Pressure Range     | Wt.     |
|------------|----------------|--------------------|---------|
| IP DWSDBTk | 3 GPM - 10 GPM | 1,500 to 5,000 PSI | 10 lbs. |

**Wand Handles (Foam Systems)**

**438 Wand Handles** are ideal for use with triple foam wax and clear coat wax systems. Handles are standard with nozzle tip protector and feature 3/8" FPT inlet x 1/8" FPT outlet. Available in Blue, Red or Black. Nozzle protectors are available separately and can also be used with high pressure spray wands. **ST1500HH** is a wand handle only, blue in color. 3/8" FPT Inlet x 1/4" FPT Outlet.



| Part No.    | Description                           |
|-------------|---------------------------------------|
| BC 438      | Blue Wand Handle with Protector.....  |
| BC 438B     | Black Wand Handle with Protector..... |
| BC 438R     | Red Wand Handle with Protector.....   |
| BC 140      | Blue Tip Protector ONLY .....         |
| BC 140B     | Black Tip Protector ONLY .....        |
| BC 140R     | Red Tip Protector ONLY .....          |
| NP ST1500HH | Blue Wand Handle ONLY, Suttner.....   |

**WAND HANDLES For 1/4" Extensions**



**Urethane-Coated Wand Handles** for use with PreSoak, Clear Coat or Triple Foam Systems. Black in color. **257** is galvanized steel pipe and fittings. **357S** is stainless steel pipe with stainless steel inlet and outlet fittings.

| Part No. | Description                               |
|----------|---|
| BC 257   | Wand Handle with galvanized fittings .... |
| BC 357S  | Wand Handle with S.S. fittings .....      |

**Telescoping Spot Spray Wand**


**Telescoping Spot Spray Wand** for a variety of applications. Plastic body and adjustable pattern spray nozzle with chromed aluminum lance extension. 3/8" Hose barb inlet fitting. Adjustable from 33" to 47". Comes with #18 spray tip.



| Part No.  | Length    |
|-----------|-----------|
| MV SG500T | 33" - 47" |

**Gutter Cleaning Wands**

**Gutter Cleaning Wands** are rated to 4000 PSI. Chrome-plated construction. Both models feature 1/4" male quick coupler inlet and 1/4" female quick coupler outlet. **No. 2201** is the smaller unit and is 6" long to the bend. **No. 2203** is 28" long to the bend.

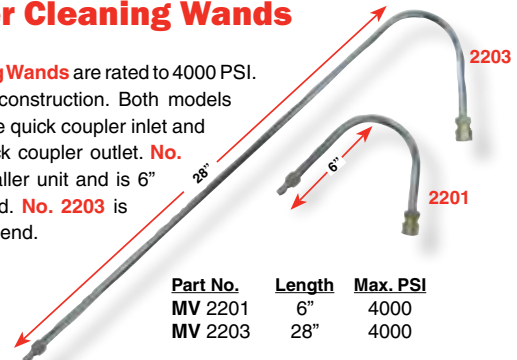

| Part No. | Length | Max. PSI |
|----------|--------|----------|
| MV 2201  | 6"     | 4000     |
| MV 2203  | 28"    | 4000     |



Viton® is a registered trademark of DuPont Performance Elastomers