


Wall Mounted Chemical Spray & Chemical Foam Systems

— *Airless or Air Assisted Styles* —


DEMA Airless Spray or Air Assist Foam Systems are an excellent choice for industrial cleaning, vehicle cleaning, food processing applications and more. Clean and spray only with wet foam, (*Airless*) or create a clinging foam that works with existing compressed air, (*Air Assist*).

All systems are operated with normal city water supply and have impact resistant ABS plastic case/covers with stainless wall mount plates. Easy turn ball valves are a standard feature on all models.

Systems are fed from city water pressure and feature (2) chemical valves and a separate rinse valve. Adjustable ratio chemical injectors are included in all systems.

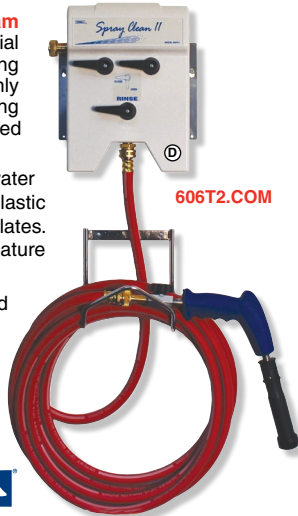

606T2.COM

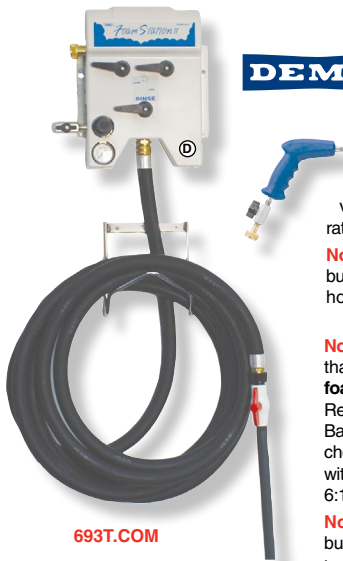

693T.COM

No. 606T-2 is an **Airless Spray Clean** unit that creates a standard solution as a **wet foam**, no air required. Base system only, no hose or wands, (2) chemical valves, (1) rinse valve. Chemical injector mix ratio is from 37:1 to 512:1 at 75Cps.

No. 606T2.COM is the same unit as above, but includes 6' inlet hose, 25' discharge hose, hose rack and spray wand.

No. 693T is an **Air Assist Foam Station** that can create a **shaving creme style foam** depending on the chemical being used. Requires air supplied from your air compressor. Base system only, no hose or wands. (2) chemical valves, (1) rinse valve, air regulator with gauge. Chemical injector mix ratio is from 6:1 to 200:1 AT 75CPS.

No. 693T.COM is the same unit as above, but includes 6' inlet hose, 25' discharge hose, hose rack and foam wand.

Part-No.	Type	Hose/Wands	Wt.
DE 606T-2	Airless	No	5.4 lbs.
DE 606T2.COM	Airless	Yes	10 lbs.
DE 693T	Air Assist	No	5 lbs.
DE 693T.COM	Air Assist	Yes	10 lbs.



MEZZO Change-Over Valves

Unique Change Over Valves are designed for two stage wash or single wash/single rinse pressure cleaning. Popular in fleet washing where (2) different chemicals are applied at different times without changing out nozzles or foamers. Manual push two-way shuttle allows for easy changeover from one outlet to the other.



ME2 Shown with Trigger Wand & Sprayer (Not Included)

Standard with one side support handle, (2) 1/4" stainless quick couplers and (1) 1/4" stainless quick nipple. Rated to 3700 PSI and 5 GPM. Overall length is approximately 12".

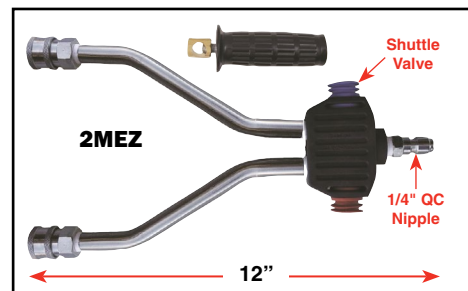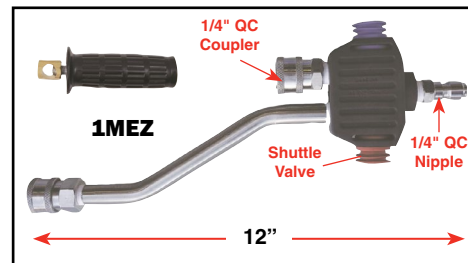

Part No.		Flow	PSI
MV 1MEZ	Single Mezzo Valve	5 GPM	3700
MV 2MEZ	Double Mezzo Valve	5 GPM	3700



Trustpilot

★★★★★

Whoever is in the Parts Department...

"Whoever is in parts department at extension number 5516 is they most helpful parts guy I've ever dealt with anywhere. I send him pictures of what in working on and he keeps me on the phone while he figures out what I need. Excellent costumer service at a way more reasonable price then the dealer. Look forward to doing business with you in the future . thanks for all the help"

Daniel