

## Brass Industrial Fog Nozzles

- Shut Off - Straight Stream - Fog
- Delivers 30°-60°-90° Fog Pattern
- Supplied with Bumper
- UL & FM Approved for Class A & B Fires (except 3/4" GHT & 2").
- For Use Up to 175 PSI (water only) at 70° F.



Part No.	Size	Thread	90° Spray GPM@ 100 PSI
EV BFN75GHT	3/4"	GHT	—
EV BFN150	1-1/2"	* NPSH	85
EV BFN200	2"	* NPSH	108

\* Female NPSH is compatible with Male NPT fittings.

## High Pressure Brass Industrial Fog Nozzle

— To 300 PSI —



- Combination Straight Stream & Fog
- Shut Off - Straight Stream - Fog
- Operating Pressure from 25 PSI to 300 PSI (water only) at 70° F.
- Large One-Piece Rubber Bumper with Molded Teeth
- Knurled Base
- Factory Mutual (FM) Approved.

Part No.	Size	Thread	90° Spray GPM@ 100 PSI
EV HPFN150	1-1/2"	*NPSH	117


\* Female NPSH is compatible with Male NPT fittings.

## Tapered Brass & Poly Hose Nozzles

— WATER ONLY —

Nonadjustable - Solid Stream

For washdown and high volume cleaning - Rated to 100 PSI at 70° F.

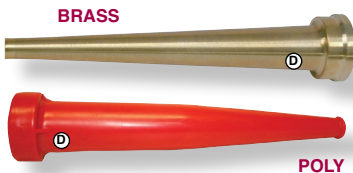

Part No.	Connection	Length	Outlet	GPM @100 PSI
EV BN6	3/4" GHT Brass	6"	1/4"	18
EV BN10	1" FPT Brass	8"	5/16"	25
EV BN12	1-1/4" FPT Brass	10"	3/8"	42
EV BN15	1-1/2" FPT Brass	12"	1/2"	75
EV BN20	2" FPT Brass	12"	9/16"	75
EV 1510	* 1-1/2" FPT Poly	10"	1/2"	75

\* Polycarbonate Plastic.

## Wash Down Nozzles

**90016** Industrial Grade Trigger Nozzle. Insulated grip protects from hot or cold temperatures. Rated to 120° F. and 100 PSI. Inlet is 3/4" FGHT.

**90051** Fire Hose Nozzle with on/off control. Can throw water stream up to 40'. Adjustable spray pattern. Rated to 120° F. and 100 PSI. Inlet is 3/4" FGHT.



Part No.	
GQ 90016	Trigger Nozzle.....
GQ 90051	Fire Nozzle.....

**90016**  
Insulated Trigger Nozzle

## Polycarbonate Adjustable Hose Nozzles


COMMERCIAL DUTY



Fully adjustable from solid stream to a fine mist. Polycarbonate construction with heavy rubber bumper. Rated to 100 PSI - water only.

Part No.	Size	GPM @100 PSI
EV FNB75GHT	3/4" FGHT	15
EV FNB100S	1" FPT	30
EV FNB150S	1-1/2" FPT	75
EV FNB200S	2" FPT	75

## High Flow Polycarbonate Adjustable Fog Nozzles

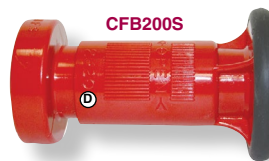

- Red Polycarbonate with Bumper, Black Plastic & Steel Stem
- Adjusts from Straight Stream to Fog
- Provides Consistent Volume at any Spray Angle
- For Use Up to 100 PSI (Water Only)

Part No.	Size	Thread	90° Spray GPM@ 100 PSI
EV CFB200S	2"	* NPSH	150
EV HGCFB250	2-1/2"	** NST (NH)	215
EV FM2025F	Brass Adapter, 2-1/2" MNST x 2" FNPT .....		
EV FM2525F	Brass Adapter, 2-1/2" MNST x 2-1/2" FNPT ...		
EV CFG200S	Replacement Gasket, 2" NPSH Size is 1.680" ID, 2.340" OD & .156" Thick.....		
EV CFG250NST	Replacement Gasket, 2-1/2" NST (NH) Size is 2.250" ID, 3" OD & .187" Thick.....		

\* NPSH Female Threads are Compatible with 2" MNPT Threads. \*\* NST Threads-Use with Adapters listed Above.

## Ball Shut-Off Nozzles Forestry Grade

FBSO100S-PG

— Can Use with Forestry Fog Nozzles Below —

Cast aluminum, anodized body, hard coated threads and acetal ball. Working pressure up to 600 PSI. **Note:** PG Models include pistol grip.



Part No.	Size	Thread	Waterway
EV FBSO100S	1"	* NPSH	3/4"
EV FBSO150S	1-1/2"	* NPSH	1"
EV FBSO100S-PG	1"	* NPSH	3/4"
EV FBSO150S-PG	1-1/2"	* NPSH	1"

\* NPSH is compatible with Male NPT fittings.

## Forestry Fog Nozzles

600 PSI Rating



- Combination Fog and Straight Stream
- Dual Flow Rate Nozzles (Turn set Screw for Higher Rate)
- Corrosion-Resistant Plated
- Maroon Hard Coated Barrel Allows for Easy Identification
- Operating Pressure to 600 PSI (water only).

Part No.	Size	Thread	Dual Flow Rates	
			Straight Stream GPM @ 100 PSI	Straight Stream GPM @ 100 PSI
EV FFN75GHT	3/4"	GHT	1-2 *	3-4 *
EV FFN100	1"	** NPSH	12	25
EV FFN150	1-1/2"	** NPSH	25	70

\* GPM Rating @ 40 PSI. \*\* Female NPSH is compatible with Male NPT fittings.