




Series 1163 Garden Hose Quick Couplings


— Garden Hose Threads —

No More Threading Nozzles! Unvalved design permits maximum flow with minimum pressure drop. Constructed of brass and stainless steel for extra strength and long life. **Note:** These couplings are designed for low pressure water service only. **Do not exceed 200 PSI.**

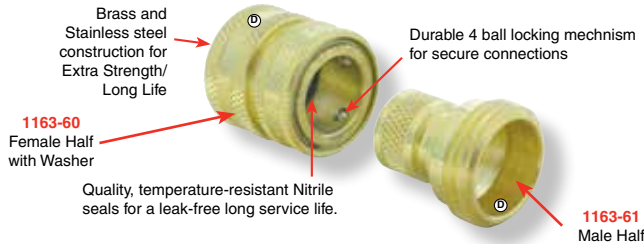

Part No.	Description
PA 1163-60	Female Half With Washer
PA 1163-61	Male Half
PA 4730001	Replacement Washer

Garden Hose Shut-Off Valves

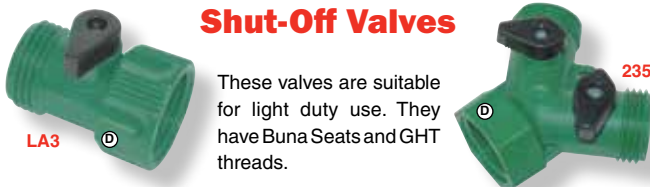


These valves are suitable for light duty use. They have Buna Seats and GHT threads.

Part No.	Description
TW LA3	SINGLE GHT Valve, Plastic.....
SM 235	DOUBLE GHT Valve, Plastic.....
SM 65	SINGLE GHT Valve, Zinc Diecast.....

Tapered Brass & Poly Hose Nozzles

Nonadjustable - Solid Stream

For Washdown and High Volume Cleaning - Rated to 100 PSI

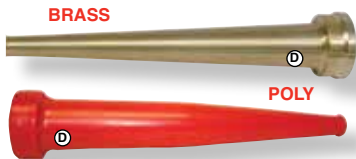

Part No.	CONNECTION	LENGTH	OUTLET	GPM @ 100 PSI
EV BN6	3/4" GHT Brass	6"	1/4"	18
EV BN10	1" FPT Brass	8"	5/16"	25
EV BN12	1-1/4" FPT Brass	10"	3/8"	42
EV BN15	1-1/2" FPT Brass	12"	1/2"	75
EV BN20	2" FPT Brass	12"	9/16"	75
EV 1510	* 1-1/2" FPT Poly	10"	1/2"	75

* Polycarbonate Plastic.

Steam Quick Couplers



Quick Disconnect Steam Couplings have a large diameter sleeve flange that aids in connecting hose assemblies used in steam cleaner applications. Standard with EPDM seals rated to 338° F. at 100 PSI with saturated steam. Ports are 3/8" FPT. Double shut style.

Part-No.	Description
KH B3H21Y	3/8" Coupler.....
KH B3K21192	3/8" Plug

Twist Couplers & Plugs



SUTTNER Twist-type Couplers and Plugs allow for quick and easy coupling or uncoupling of high pressure hose assemblies. Available in 1/4", 3/8" or 1/2" FPT sizes. Maximum pressure is 3500 PSI. Constructed of brass and molded plastic, they can be used to hook-up directly to the discharge port of many pressure washers. M22 x FPT.



Part No.	Description	FPT Size
NP ST40-1/4	Coupler.....	1/4"
NP ST40-3/8	Coupler.....	3/8"
NP ST40-1/2	Coupler.....	1/2"
NP 0500	"O" Ring for 1/4", 3/8" & 1/2"	
NP ST41-1/4	Plug	1/4"
NP ST41-3/8	Plug	3/8"
NP ST41-1/2	Plug	1/2"



Garden Hose Fitting with Check Valve

Garden Hose Coupler with Built-In Check Valve eliminates the need to shut-off a faucet when disconnecting hoses. Stainless steel construction. 3/4" FGHT on both ends. Male plug is open, no check. Rated to 75 PSI.



Part No.	Description
MV 245020	Stainless Garden Hose Coupler with Check Valve
MV 245002	Stainless Garden Hose Plug.....

Polypropylene Garden Hose Thread Fittings & Camlocks



Provides a simple and quick way to connect and disconnect garden hoses to spigots, sprinklers, garden hose thread hose nozzles, etc. Constructed of yellow fiberglass reinforced polypropylene for durability and no rust. 150 PSI rating @ 70° F.

Part No.	Description
TK GHMT075F	3/4" GHMT x 3/4" Adapter
TK GHFT075A	3/4" GHFT x 3/4" Adapter
TK GHFT075M	3/4" GHFT x 3/4" MPT
TK GHMT075FPT	3/4" GHMT x 3/4" FPT
TK GHFT075D	3/4" GHFT x 3/4" Coupler
TK GHMT075B	3/4" GHMT x 3/4" Coupler