


Foot Control Valves

Foot Controlled Valves for sewer and jetter hoses. Allows operator to maneuver sewer nozzles & hose and operate pressure with foot. Inlet and outlet are positioned to help keep hoses out of the way. Pedal and valve are in a protective housing. Heavy gauge steel construction for durability and stability. Valve is easy to repair if needed. Inlet is either 1/4" or 3/8" FPT. Outlet is 1/4" FPT. Temperatures to 320° F.

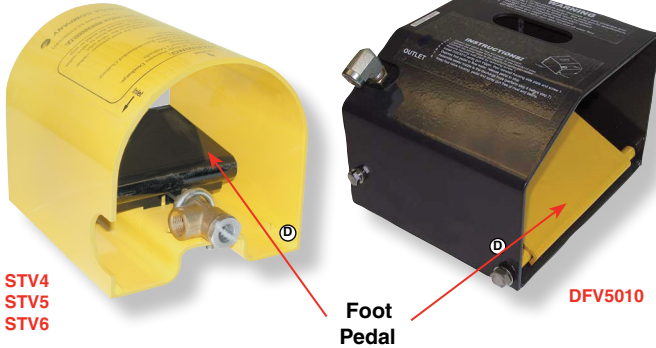


Part No.	Description	Flow	PSI
NP STV4	Foot Control Valve	8	3200
IP DFV5010	Foot Control Valve	10	5000
NP STV5	Foot Control Valve	12	5000
NP STV6	Foot Control Valve	10	7300

High Temperature Jetter Hoses

— Rated to 190° F —

High Temp Jetter Hoses from Piranha are rated up to 4000 PSI and 190° F. Ideal for jetting lateral lines, tight pipe bends and commercial, industrial or residential applications with hot or cold water.

Provides rugged and reliable service under the most severe and demanding conditions. 100% pressure tested before shipping. All hoses have solid male ends but other fittings are available. Common sizes shown but other lengths can be made to order. Abrasion resistant, green polyurethane cover. Made in USA.

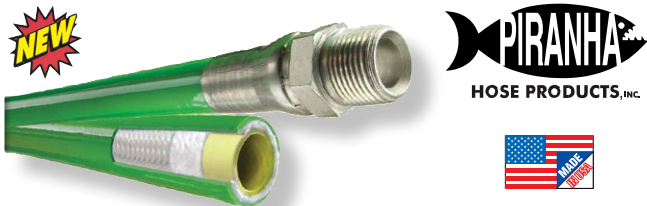

Part No.	I.D.	Length	PSI	Max Temp	Wt
TF LLGR-MM04x50	1/4"	50'	4000	190° F	3 lbs
TF LL4-100	1/4"	100'	4000	190° F	6 lbs
TF LL4-200	1/4"	200'	4000	190° F	13 lbs
TF LL4-300	1/4"	300'	4000	190° F	19 lbs
TF LLGR-MM06x50	3/8"	50'	4000	190° F	6 lbs
TF LL6-100	3/8"	100'	4000	190° F	12 lbs
TF LL6-200	3/8"	200'	4000	190° F	23 lbs
TF LL6-300	3/8"	300'	4000	190° F	34 lbs
TF LL8-100	1/2"	100'	4000	190° F	17 lbs
TF LL8-200	1/2"	200'	4000	190° F	33 lbs
TF LL8-300	1/2"	300'	4000	190° F	49 lbs

Water Jetting Hoses

Rated to 140° F.

An ideal choice for Sewer Cleaning & Water Applications.

For small Jetter machines and trailer units. Smooth, black cover features polyurethane construction for added abrasion resistance and ease of use. For pressures to 4000 PSI. Standard with NPT solid male fittings on 1/8" and 1/4" sizes and MPT solid x swivel on 3/8" and 1/2" sizes. Other lengths are available to meet your requirements. Rated from -40° F. to +140° F.



Part No.	I.D.	Length	PSI	Max. Flow	Wt.
NP STH1	1/8"	50'	4000	1.5 GPM	1.5 lbs.
NP STH2	1/8"	100'	4000	1.5 GPM	3 lbs.
NP STH11	1/8"	150'	4000	1.5 GPM	4.5 lbs.
NP STH11A	1/8"	200'	4000	1.5 GPM	5 lbs.
NP STH11B	1/8"	250'	4000	1.5 GPM	7 lbs.
NP STH11C	1/8"	300'	4000	1.5 GPM	10 lbs.
NP STH9	1/4"	50'	4000	2.5 GPM	3.5 lbs.
NP STH4	1/4"	75'	4000	2.5 GPM	5 lbs.
NP STH6	1/4"	100'	4000	2.5 GPM	6.5 lbs.
NP STH7	1/4"	150'	4000	2.5 GPM	9 lbs.
NP STH8	1/4"	200'	4000	2.5 GPM	12 lbs.
NP STH84	1/4"	300'	4000	2.5 GPM	18 lbs.
NP STH86	1/4"	400'	4000	2.5 GPM	25 lbs.
NP STH12	3/8"	50'	4000	5.0 GPM	5.5 lbs.
NP STH14	3/8"	100'	4000	5.0 GPM	10 lbs.
NP STH15	3/8"	150'	4000	5.0 GPM	17 lbs.
NP STH16	3/8"	200'	4000	5.0 GPM	22 lbs.
NP STH18	3/8"	300'	4000	5.0 GPM	33 lbs.
NP STH20	3/8"	400'	4000	5.0 GPM	45 lbs.
NP STH22	3/8"	500'	4000	5.0 GPM	56 lbs.
NP STH27	3/8"	600'	4000	5.0 GPM	67 lbs.
NP STH31	* 1/2"	50'	4000	8.0 GPM	10 lbs.
NP STH32	* 1/2"	100'	4000	8.0 GPM	19 lbs.
NP STH30	* 1/2"	200'	4000	8.0 GPM	38 lbs.
NP STH29	* 1/2"	300'	4000	8.0 GPM	60 lbs.
NP STH23	* 1/2"	400'	4000	8.0 GPM	75 lbs.
NP STH35	* 1/2"	500'	4000	8.0 GPM	90 lbs.
NP STH28	* 1/2"	600'	4000	8.0 GPM	105 lbs.

* 1/2" Hoses are Green; 1/8" to 3/8" are Black.

Urethane Bulk Wash/Solution Hose

Extreme Abrasion Resistance



Unique Urethane Wash/Solution Hose is designed for extreme abrasion resistance. Outlasts rubber hoses by 5 to 6 times. Ideal for use in car or truck wash bays, carpet solution hose, pressure wash applications and more. Pressure ratings to 3000 PSI and temperatures to 250° F.

Available in 1/4" or 3/8" sizes. Fittings and ferrules shown are required to be used with this hose for safety of use and operation. Sold in cut lengths or bulk coils (no reel or spool). Construction is blue translucent cover with internal fiber braids.

PA No.	I.D. Size	Max. Psi	* Std. Pkg.
FN BV-1/4	1/4"	3000	300 Ft.
FN BV-3/8	3/8"	3000	300 Ft.
FN 104074	1/4" Hose x 1/4" MPT Solid Fitting, Stainless		
FN 104934	1/4" Hose x 3/8" MPT Solid Fitting, Stainless		
FN 104140	1/4" Bend Protector.....		
FN 104910	1/4" Crimp Ferrule.....		
FN 103062	3/8" Hose x 3/8" MPT Solid Fitting, Plated....		
FN 103063	3/8" Crimp Ferrule, Plated.....		
FN 103100	3/8" Hose Guard Bend Protector.....		

* 20% Discount for 300' Purchase.
(Coils have multiple lengths, not continuous).

CONTACT US FOR ALL YOUR PRODUCT NEEDS!



OMAHA, NEBRASKA
1-800-228-9666
FAX: 1-402-333-5546

DAVENPORT, IOWA
1-800-553-6975
FAX: 1-563-386-5448



www.dultmeier.com