

## Cush-A-Claw™ Clamping System

The **Cush-A-Claw Clamps** are designed to grab and hold pipe, tube, conduit or hose securely in place. Patented design allows for quick, simple and easy installation. TPE materials will not rust. Non-conducting. Rated from -50° to +275° F. Can be used for indoor or outdoor applications. 75 lb. load limit, (Safety factor 3).

**Available in Two Styles:**

**Strut Mount**, twist and lock clamps are for use with steel or stainless channel.

**Surface Mount** clamps have a counter-sunk center hole for #10 screw mounting to any flat surface.

75 lbs. Load  
(safety Factor 3)



Surface Mount

Surface Mount

### Strut Mount Cush-A-Claw

| Part No. | Hose/Pipe/Tubing O.D. Size | ** Std. Pkg. |
|----------|----------------------------|--------------|
| ZS CL4   | 1/4"                       | 50           |
| ZS CL6   | 3/8"                       | 50           |
| ZS CL8   | 1/2"                       | 50           |
| ZS CL10  | 5/8"                       | 25           |
| ZS CL12  | 3/4"                       | 25           |
| ZS CL14  | 7/8"                       | 25           |
| ZS CL18  | 1-1/8"                     | 20           |

### EMT Conduit

|          |      |    |
|----------|------|----|
| ZS EMT12 | 1/2" | 25 |
| ZS EMT34 | 3/4" | 25 |
| ZS EMT1  | 1"   | 20 |

\*\* 10% Discount for Std Pkg. Purchase.

### Surface Mount Cush-A-Claw

| Part No. | Hose/Pipe/Tubing O.D. Size | ** Std. Pkg. |
|----------|----------------------------|--------------|
| ZS CLS4  | 1/4"                       | 50           |
| ZS CLS6  | 3/8"                       | 50           |
| ZS CLS8  | 1/2"                       | 50           |
| ZS CLS10 | 5/8"                       | 25           |
| ZS CLS12 | 3/4"                       | 25           |
| ZS CLS14 | 7/8"                       | 25           |
| ZS CLS18 | 1-1/8"                     | 20           |

### EMT Conduit

|           |      |    |
|-----------|------|----|
| ZS EMTS12 | 1/2" | 25 |
| ZS EMTS34 | 3/4" | 25 |
| ZS EMTS1  | 1"   | 20 |

\*\* 10% Discount for Std Pkg. Purchase.




## Beta Clamps Standard Series

**Beta Clamps** are ideal for clamping pipe, tube, hose or electric cable. Unique clamp design offers shock absorption, vibration dampening and noise reduction. Rated up to 1500 PSI without dynamic loads. (Heavy duty models available for operations with pressure surges and wide temperature fluctuations).



Clamp assemblies include hex bolts, polypropylene cushions and weldable steel bases. (Z-Strut and Din Rail bases also available). Polypropylene cushions are rated from -20° to +195° F.

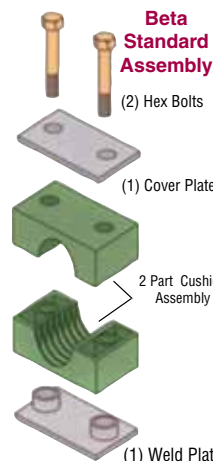

### Pipe/Tubing

| Part No.  | O.D. Tube Size | O.D. Pipe Size |
|-----------|----------------|----------------|
| ZS S1004S | 1/4" (.250)    | -              |
| ZS S1006S | 3/8" (.375)    | -              |
| ZS S1007S | -              | 1/8" (.405)    |
| ZS S2008S | 1/2" (.500)    | -              |
| ZS S2009S | -              | 1/4" (.540)    |
| ZS S2010S | 5/8" (.625)    | -              |
| ZS S2011S | -              | 3/8" (.675)    |
| ZS S3012S | 3/4" (.750)    | -              |
| ZS S3014S | -              | 1/2" (.840)    |
| ZS S3015S | 7/8" (.875)    | -              |
| ZS S3016S | 1" (1.00)      | -              |
| ZS S4017S | -              | 3/4" (1.050)   |
| ZS S4018S | 1-1/8" (1.125) | -              |
| ZS S5020S | 1-1/4"         | -              |
| ZS S5021S | -              | 1" (1.315)     |
| ZS S5024S | 1-1/2" (1.500) | -              |
| ZS S5027S | -              | 1-1/4" (1.660) |
| ZS S6028S | 1-3/4" (1.750) | -              |
| ZS S6030S | -              | 1-1/2" (1.900) |
| ZS S6032S | 2"             | -              |
| ZS S7038S | -              | 2"             |

\* NOTE: 10% Discount for 50+ Assorted Clamps on Order. 15% Discount on 100+ Assorted.

## Alpha Series™ CushionClamps

**Alpha Series Cushion Clamps:** U-bolt assembly secures pipe runs to any flat surface. U-bolts can be used as a full contact hanger. Assemblies consist of Thermoplastic Cushion and Electro-galvanized U-bolt with nylon insert locknuts. Stainless bolts also available.




Nominal

| Part No.   | Nominal Pipe Size |
|------------|-------------------|
| ZS UB12PA  | 1/2"              |
| ZS UB34PA  | 3/4"              |
| ZS UB1PA   | 1"                |
| ZS UB114PA | 1-1/4"            |
| ZS UB112PA | 1-1/2"            |
| ZS UB2PA   | 2"                |
| ZS UB3PA   | 3"                |
| ZS UB4PA   | 4"                |
| ZS UB6PA   | 6"                |



## Mounting Channel Struts



**Mounting Channel** is available in 1-5/8" wide. Construction is galvanized or 304SS steel.

Channel is designed to be mounted to horizontal or vertical surfaces. Clamps then hold pipe, hose or tubing securely to the channel.

| Part No.   | Channel Only | Width  | Height | Length |
|------------|--------------|--------|--------|--------|
| KE PS200SS | 304SS        | 1-5/8" | 1-5/8" | 20'    |
| KE PS200EH | Galvanized   | 1-5/8" | 1-5/8" | 20'    |