

12-Volt Pressure Washer

12-Volt Pressure Washer featuring *Cat* plunger pump with built-in unloader and chemical injector. Designed to be easily mounted on your equipment frame and powered from your existing battery. Output is 1.50 GPM at 1000 PSI. Motor is 12-volt, 1 Hp, 80 full load amps. 25' Spray hose and trigger wand with 18" extension are standard. 3/8" Brass quick couplers to easily remove hose from pump are also included.



Part No.	Output	Wt.
DU PMV700	1.5 GPM @ 700 PSI	55 lbs.


12-Volt Pressure Washer (Low Flow)

Compact washdown kits featuring standard *Pumpte*c pumps. Simple, quiet and reliable. All kits include pump, 12Volt motor, adjustable pattern spray wand, unloader relief valve, inlet filter, inlet hose and on/off switch, (except **80729**). All models can be easily mounted to your equipment frame.

80398 is rated to 1.0 GPM and 200 PSI. Also includes 25ft spray hose and wire harness.
81860 is rated to 1.3 GPM and 600 PSI. With switch, no discharge hose or wire harness.
80729 is rated to 1.4 GPM and 700 PSI. No discharge hose or switch, for direct wiring.
70488 is an adjustable pattern spray wand that comes with all models.



80398

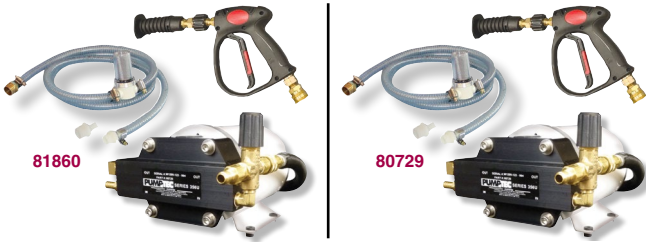

81860

80729

Part No.	GPM	PSI	AMP Draw	Wt.
PX 80398	1.0	200	15	12 lbs.
PX 81860	1.3	600	43	31 lbs.
PX 80729	1.4	700	60	46 lbs.
PX 80488	Trigger wand as replacement			2 lbs.

12-Volt Pressure Washer Unit (High Flow)


Pumptec 12-Volt Wash Down Units featuring the X Series pump with ceramic plungers. Fill and wash down in one unit. Two models to choose from. Both include pump, motor, inlet plumbing kit, 25' discharge hose and adjustable spray wand. (Also available in 120 or 240 volt if required).



Part No.	Flow	PSI	Wt.
PX 81561	5.0	100	20 lbs.
PX 81651	6.4	160	20 lbs.

Hydraulic Pressure Washer

This **Hydraulically-Driven Pressure Washer** is designed for remote and explosion-proof environments where electricity cannot be used. The ideal choice for use with washdown and cleaning of construction equipment, agricultural equipment, concrete cleanup, etc.



AR26472 PUMP ONLY



Wand & Hose are included

Kit is complete with hydraulic motor, *AR* plunger pump, mounting rails, unloader valve, chemical injector, pressure gauge, and quick disconnect for hose. Models come with spray wand and 50' hose as shown. A wide variety of flows and pressures are available to meet your needs. Ports are 3/4" FGHT inlet and 3/8" female quick disconnect outlet. Rated to 140° F.

Part No.	Cleaning Capacity	Hydraulic Motor Requirements	Wt.
AR HYDRK1520-1000	3.0 GPM @ 1000 PSI	5.6 GPM @ 900 PSI	41 lbs.
AR HYDRK1520-1500	4.0 GPM @ 1500 PSI	7.5 GPM @ 1300 PSI	41 lbs.
AR HYDRK1520-2000	4.0 GPM @ 2000 PSI	7.5 GPM @ 1800 PSI	45 lbs.

Enclosed Cold Water Pressure Washers

Many industries require enclosed and covered pump systems for industrial cleaning applications. These cold water units are belt-driven and feature electric motors and *General* plunger pumps in a stationary, enclosed housing. All units include trigger wand, 50' of hose, high pressure detergent system, float tank, unloader valve and external on-off switch. (Other motor phase is available from those shown).



50 ft. Hose



Wand

Part No.	Max. Flow	Max. PSI	Motor	Wt.
WD WD311	3.0 GPM	1100	2 HP / 1 PH / 115V	230 lbs.
WD WD418	4.0 GPM	1800	5 HP / 1 PH / 230V	330 lbs.
WD WD430	4.0 GPM	3000	8 HP / 1 PH / 230V	390 lbs.
WD WD530	5.0 GPM	3000	10 HP / 3 PH / 230V	350 lbs.

thank you!

WE APPRECIATE YOUR BUSINESS

Viton® is a registered trademark of DuPont Performance Elastomers