




High Pressure Spinner Assemblies from Mosmatic are specifically designed for the rigors of Truck and Car wash applications as well as a variety of Industrial cleaning needs.

Unique "Stabilizer Nozzles" make it possible to clean all kinds of surfaces from a further distance than conventional nozzles without pressure loss. Nozzles have an air injection feature that expands and contains the water flow allowing longer distance of travel with higher impact. Stainless Steel components with Swiss Engineering ensure long life and exceptional performance. Rated to 250° F. and 2500 or 4000 PSI as noted.

1) Spinners are available as Complete assemblies that include Swivel, 4" x 4" Rotor arm, Stabilizer nozzles and adapters.

2) Mix and Match assemblies would require (1) swivel, (4) nozzles, (4) inserts and (1) rotor arm option that allows for cleaning coverages to meet your specific needs.

* Ordering either way requires (4) EG insert orifices that are sold separately and must be matched to your pump flow and pressure. We can help with sizing for these inserts.

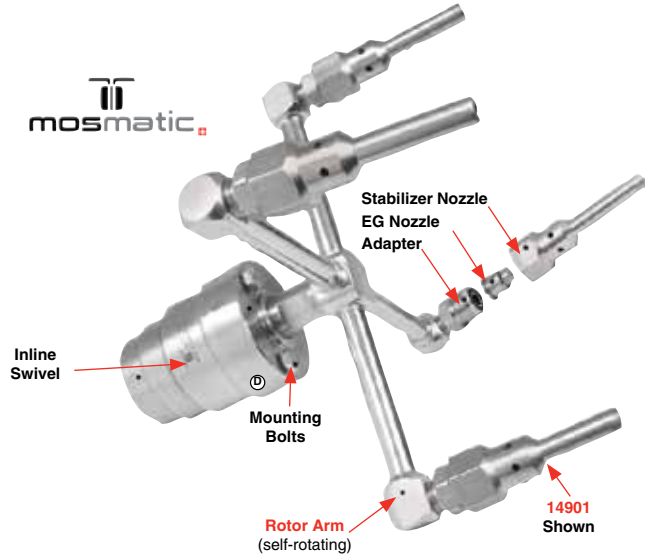

— Two Ways To Order —

1) Order Complete Spider Spinner Assembly & (4) Nozzle Inserts. Flow Rates Will Vary With Swivel Size. Rated to 2500 PSI

Distance	Cleaning Coverage
10"	13"
20"	22"
30"	31"
40"	40"

Part No.	Swivel	Rotor Arm	Stabilizer Nozzles
MM 81933	3/8" FPT (1)	4" x 4" (1)	14901 (4)
MM 81934	1/2" FPT	4" x 4" (1)	14901 (4)
MM 81935	3/4" FPT	4" x 4" (1)	14901 (4)
MM 81936	1" FPT	4" x 4" (1)	14901 (4)
MM 00EG*	Nozzle Inserts Matched System.....		

CALL for CURRENT PRICING

2) Order As Mix & Match Spinner Assemblies. Flow Rates Will Vary with Swivel Size. Pressures As Shown.

Distance	Cleaning Coverage		
	4"	6"	8"
10"	17"	19"	21"
20"	28"	29"	31"
30"	37"	40"	41"
40"	49"	49"	51"

Swivel Option, (1) Required

Part No.	Inlet	Pressure
MM 59663	3/8" FPT	4000 PSI
MM 39865	1/2" FPT	2500 PSI
MM 39907	3/4" FPT	2500 PSI
MM 39905	1" FPT	2500 PSI

Call Toll Free For Prices

Nozzle & Insert Option, (4) Ea. Required. Rated to 4000 PSI

Part No.	Description
MM 14901	Stabilizer Nozzle with Adapter
MM 00EG	Nozzle Inserts Matched to Flow & Pressure

Call Toll Free For Prices

Rotor Arm Options for 3/8" Swivels, (1) Required.

Part No.	Dia.	Arms	Nozzles Req'd
MM 829113	4"	4	4
MM 829114	6"	4	4
MM 829115	8"	4	4

Call Toll Free For Prices

Rotor Arm Options for 1/2", 3/4", 1" Swivels, (1) Required. Rated to 2500 PSI

Part No.	Dia.	Arms	Nozzles Req'd
MM 829123	4"	4	4
MM 829124	6"	4	4
MM 829125	8"	4	4

Call Toll Free For Prices



Very Helpful...

"Very helpful and knowledgeable staff and extremely friendly. Will continue to do business here"

Nathan