



GPRO Series Pumps
115 Volt
Designed for Heavy Duty Use

The **GPRO Series Pumps** are designed for heavy duty use and carry a **5 Year Warranty**. 25 GPM & 35 GPM flow rate at the nozzle (without filter). U.L. Listed for diesel, gasoline and kerosene.

V20-115 Series pumps are next-generation modular vane pumps engineered for fueling large equipment in heavy-duty applications. Fast and flexible with dual 115/230V power configuration. Able to load up to 600 gallons of fuel uninterrupted. Suction lift of 15Ft for Diesel, 18Ft for gasoline. 20 GPM flow rate at the nozzle (without filter). UL Listed for diesel (up to B20), gasoline (up to E15), and kerosene.

Features:

- Professional Grade Product Line
- **5 Year Pump & Motor Warranty**
- High Flow 1" Automatic Diesel Nozzle
- 1" x 18" Dispensing Hose
- Center Base Inlet with Check Valve for Even Weight Distribution
- 2" Tank Adapter (Vacuum Breaker Ready on 115 Volt Models)
- U.L. Listed (For Diesel)
- Pump/Meter Combinations Include QM40 Oval Gear Meter (0.5% Accuracy)
- Lockable Nozzle Holder
- Good to -20° F.
- 30 Minute Duty Cycle (On/Off)
- UL Listed for Diesel Fuel, Gasoline & Kerosene
- 2" MPT Mounting, 1" Inlet/Outlet



Extreme Temperature Models Available



Lockable Nozzle Holder

Automatic or Manual Nozzle Models available

GPRO EXCLUSIVE!

Factory-Installed Power Cord: Reduced Installation Time

Note: All 25 & 35 GPM Models included weight centering inlet base (2" MPT) with check valve and easy access to strainers.

Center Based Inlet includes Check Valve and easy access to Fuel Strainer



Part No.	Nozzle	GPM	Voltage	Meter	Hose
GI V20-115AD	Auto Diesel	20	115/230V	None	1" x 18" **
GI V20-115PO	None	20	115/230V	None	None*
GI PRO20-115-M	Auto Diesel	25	115V	QM240	1" x 18" **
GI PRO35-115AD	Auto Diesel	35	115/230V	None	1" x 18" **
GI PRO35-115AD-M	Auto Diesel	35	115/230V	QM240	1" x 18" **
GI PRO35-115PO	None	35	115/230V	None	None*

* Pump Only & No Suction Pipe.

** Use 1-1/4" Suction Pipe for 35 GPM - 115V Models - Not included.

High Volume Diesel Transfer Pump Units

These rugged units are designed for high volume diesel transfer (Note: **Good with Biodiesel Up to B20**) so you can fill equipment quickly and save valuable time. 1" Units will provide 32 GPM and 1-1/2" units will provide 60 GPM. Choose either gas engine or electric drive motor.


Units Include CRX 6.5 HP manual start engines with C.A.R.B. rating or 3 HP, single phase TEFC motors. **MP PetroMaxx 2"** self-priming cast iron pump with Type 21 Viton® mechanical seal designed for diesel fuel, **Hannay** spring rewind hose reels, **Husky** high flow automatic nozzle with swivel.



Best Seller

FPUIP

1" Units also include Cimtek 1" 32 GPM fuel filter with 30 micron Hydrosorb element (removes water and large amounts of dirt from fuel) and 35' of 1" fuel transfer hose.

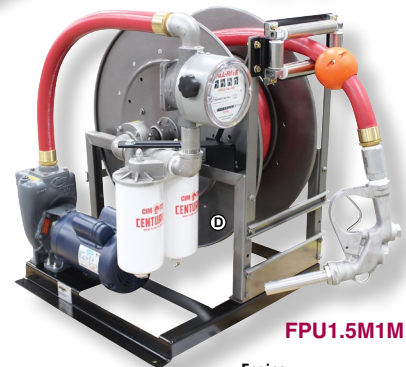

FPUI.5M1M

1-1/2" Units also include Cimtek 1-1/2" 60 GPM fuel filter with 2-30 micron Hydrosorb elements, 35' of 1-1/2" fuel transfer hose and **Husky** 1690 1-1/2" high flow automatic nozzle. All units are mounted on steel base plates (powder-coat finish).

Part No.	Description	Flowrate	Hose Size	Engine or Motor
DU FPUIP	1" Diesel Transfer Unit	32 GPM	1"	PowerPro, 6.5 HP
DU FPUIP-B	1" Diesel Transfer Unit †	32 GPM	1"	PowerPro, 6.5 HP
DU FPUIPM	1" Diesel Transfer Unit *	32 GPM	1"	PowerPro, 6.5 HP
DU FPUI.5P	1-1/2" Diesel Transfer Unit	60 GPM	1-1/2"	PowerPro, 6.5 HP
DU FPUI.5P-B	1-1/2" Diesel Transfer Unit †	60 GPM	1-1/2"	PowerPro, 6.5 HP
DU FPUI-M1	1" Diesel Transfer Unit	32 GPM	1"	3 HP, 1 PH Motor
DU FPUI.5-M1	1-1/2" Diesel Transfer Unit	60 GPM	1-1/2"	3 HP, 1 PH Motor
DU FPUI.5-M1M **	1-1/2" Diesel Trsfr Unit	60 GPM	1-1/2"	3 HP, 1 PH Motor
DU FPUI-LE	1" Diesel Transfer Unit	32 GPM	1"	Less Engine
DU FPUI.5-LE	1-1/2" Diesel Transfer Unit	60 GPM	1-1/2"	Less Engine
DU FPUI-HRK	1" Hose Reel with Hose Swivel & Nozzle Assembled.....			
DU FPUI.5-HRK	1-1/2" Hose Reel with Hose Swivel & Nozzle Assembled.....			

* Includes 1" Digital Hose End Fuel Meter. ** Includes 1-1/2", 60 GPM Meter Near Pump.

† Includes 2" Banjo Cast Iron/Viton® Pump.

Piisi Portable DEF Tank Package

Standard Features:

- 58 or 116-Gallon Capacity
- SB325 DEF Automatic Nozzle
- 12V DC DEF Pump
- 3/4" x 13' Discharge Hose
- 6.5 Ft Pump Power Cables with Clamps
- Lockable Lid
- Pallet Jack Base for Easy Loading or Unloading
- 9 GPM Pump
- 20 Min Duty Cycle
- Inlet is 2" BSP

Universal and durable DEF transportation, storage and/or delivery is achievable through the Piisi Portable Tank. This complete DEF package offers an economical solution for delivering DEF to on-road and off-road vehicles or equipment. The Piisi Portable Tank ensures a safe and quick DEF transfer via a 12V DC pump, shock-resistant polyethylene tank, ventilation cap and stainless-steel accessories. The tank is lightweight, lockable and UV-resistant. The tank body has forklift slots so that it can be easily loaded into a delivery vehicle or fuel trailer – fully loaded or empty. The pump and hose are secured on the top of the tank with a lid for added protection.

Part No.	Description
PU PPT58	Portable DEF Tank Pkg, 58 Gal, 12V, 9GPM.....
PU PPT116	Portable DEF Tank Pkg, 116 Ga, 12V, 9GPM.....
PU F2066	12 Volt, 18 Ft. Power Cable Extension, No Clamps..

Call Toll Free For Prices



PPT116



PPT58