


Self-Storing Coil Hoses

These hoses are an ideal choice for use as air supply hoses or in foam brush systems. Polyurethane construction self-coils without kinks. Hoses are abrasion and kink resistant as well as having an excellent resistance to oils. Available in a variety of colors and sizes.

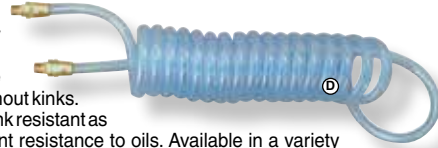


Each assembly comes standard with one swivel end and one solid end protected by bend restrictors. All hoses feature a 4" pigtail on one end and a 20" on the other. Rated to 140 psi. 1/4" hoses feature 1/4" MPT fittings. 3/8" ID hoses feature 3/8" MPT fittings. Replacement fittings are also available - see other pages.

Part No.	Color	I.D.	Working Length	Overall Length
TF A1001B	Blue	1/4"	16'	20'
TF A1001BK	Black	1/4"	16'	20'
TF A1001C	Clear	1/4"	16'	20'
TF A1001R	Red	1/4"	16'	20'
TF A1001Y	Yellow	1/4"	16'	20'
TF A1002B	Blue	1/4"	25'	30'
TF A1002BK	Black	1/4"	25'	30'
TF A1002C	Clear	1/4"	25'	30'
TF A1002R	Red	1/4"	25'	30'
TF A1002Y	Yellow	1/4"	25'	30'
TF A1012C	Clear	1/4"	35'	40'
TF A1007B	Blue	3/8"	16'	20'
TF A1007BK	Black	3/8"	16'	20'
TF A1007C	Clear	3/8"	16'	20'
TF A1007R	Red	3/8"	16'	20'
TF A1007Y	Yellow	3/8"	16'	20'
TF A1008B	Blue	3/8"	25'	30'
TF A1008BK	* Black	3/8"	25'	30'
TF A1008C	* Clear	3/8"	25'	30'
TF A1008R	* Red	3/8"	25'	30'
TF A1008Y	* Yellow	3/8"	25'	30'
TF A1011C	* Clear	3/8"	35'	-

* 3/8" is best for Triple Foam Applications.

Bulk Poly Vinyl Tubing



Sold by the foot or in standard packages for lower pricing.


Reinforced EVA Tubing is designed to transport a variety of chemicals and liquids. Translucent for easy view of flows. Higher working pressure than unbraided tubing. Lightweight and flexible. Not suitable for gasoline or diesel. Rated from -30° to +125° F. Formulated to comply with FDA requirements. Polyester yarn reinforcement. Natural color. **Good choice for softwash applications.**

Part No.	I.D.	O.D.	Max PSI @ 70° F.	* Std. Pkg.
TF RF014	1/4"	.438"	250	300'
TF RF038	3/8"	.594"	250	300'
TF RF050	1/2"	.750"	200	300'
TF RF058	5/8"	.625"	200	300'
TF RF075	3/4"	1.025"	150	100'
TF RF100	1"	1.312"	125	100'
TF RF125	1-1/4"	1.937"	100	100'
TF RF150	1-1/2"	1.656"	100	100'

* 20% Discount for Standard Package Purchase.

Foam Brush Hose Assemblies

Replacement Hose Assemblies for foam brush systems. Available in clear braided tubing, blue rubber hose or clear tube coils. Hoses come with bend restrictors to reduce wear at brush handle.



A1007C



20125, 20130, 20140 & 20150

Standard with 3/8" MPT brass fittings on both ends. Hoses are 3/8" I.D. x 12', 15', 18' & 23' long. Braided and coil hoses are clear so customers can see product flowing and are ideal for colored brush soaps.



20145

Part No.	Hose Type
TE 20125	3/8" x 12' Rubber Hose, Blue.....
TE 20130	3/8" x 15' Rubber Hose, Blue.....
TE 20140	3/8" x 18' Rubber Hose, Blue.....
TE 20150	3/8" x 23' Rubber Hose, Blue.....
TE 20145	3/8" x 15' Braided Tubing, Clear....
TF A1007C	3/8" x 15' Coil Tubing, Clear.....

Bulk PVC Hose

PVC HE WIRE-SPIRAL



Clear PVC reinforced with a spring wire. No separate layers or laminated plies. One piece construction that embeds the spring wire reinforcement

Features: Anti-collapsible • Anti-kinking • Full Vacuum rating • Light-weight • Chemical resistant • Ozone and atmospheric resistant • Temperature range 25° to 175° F. • Cold flex temperature -20° F. **Note: Cut Lengths Sold in 5' Increments Only.**

Part No.	I.D.	O.D.	Max. PSI @ 70° F.	Std. Pkg.	Std. Pkg. DISCOUNT
TF WF014	1/4"	.447"	100	100'	20%
TF WF038	3/8"	.600"	100	100'	20%
TF WF050	1/2"	.736"	100	100'	20%
TF WF075	3/4"	1.028"	70	100'	20%
TF WF100	1"	1.290"	70	100'	20%

20% Discount If Ordered in 100' Rolls.




Push-Lok Hose



Push-Lok Plus Hose from Parker. Premium, leak-free, hose solutions to your low pressure plumbing needs. Easy-to-assemble, no clamps or special tools needed. Ideal for liquids and air. Internal tube is resistant to petroleum based oils. Outer cover has excellent flexibility and abrasion resistance. Stock color is blue, but (5) other colors are available if ordered in full reels. Reusable, brass push-lok fittings are shown elsewhere in this catalog. Sold by the foot or in reels at additional discount. Rated to 158° F. on air or 185° F. on water solutions.

Inner Liner is an extruded, synthetic rubber, making it resistant to petroleum-based oil, air & water.

Barbed Push-Lok fitting seals tightly, securely.

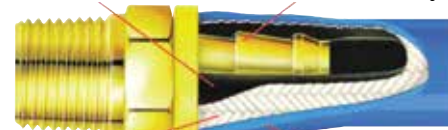

Fiber braid reinforcement layer is impregnated with synthetic rubber for added durability.

High-Quality elastomer cover - lively feel, excellent flexibility & resistance to abrasion.

Part No.	I.D. Size	O.D. Size	Max. PSI	* Std. Pkg.
PA 801-4BL	Blue Push-Lok Hose	1/4"	.50"	350 600'
PA 801-6BL	Blue Push-Lok Hose	3/8"	.63"	350 450'
PA 801-8BL	Blue Push-Lok Hose	1/2"	.78"	300 300'
PA 801-12BL	Blue Push-Lok Hose	3/4"	1.03"	300 200'
PA 801-16BL	Blue Push-Lok Hose	1"	1.28"	200 200'

* 25% Discount for Full Reel Purchase.

I.E. 3/8" Full Reel at Less 10% Per Foot.



Going The Extra Mile!

"When I called to order a new pump I had a question for a special application and the salesperson went the extra mile, instead of guessing, and called the manufacturer to cleared up all doubts I had as to whether my choice was the proper pump."

Lee J.