



ShieldAg/Acra-Plant V-Shot Planter Knives

The **V-Shot** offers precision seed placement while applying starter fertilizer. As planter blades become worn, over time, they begin to lose the ability to create a uniform seed bed. A deep V planter-crease ensures that the seed is properly seated in the bed. As the planter blades become worn, this crease eventually becomes an unruly crevice that can no longer ensure proper seed placement.


The **V-Shot** eliminates this issue. Not only does the V-Shot ensure proper seed placement by taking worn planter blades out of the equation, it also allows growers to place a starter fertilizer in the seed bed. The V-Shot is bolted directly to the implement and protects the liquid fertilizer tube, as well.

All V-Shots are packaged with 3 feet of poly tubing, zip ties, check valve, hardware and installation manual.



AP-1985V-SHOT

AP-1985V-SHOTG

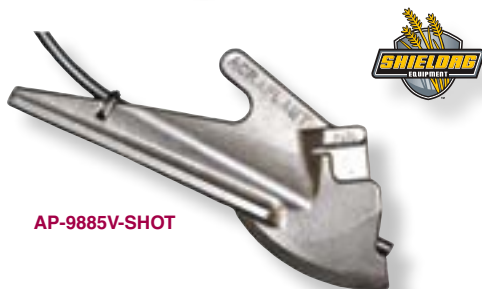

AP-9885V-SHOT



AP-4985V-SHOT

AP-7100V-SHOT

| Part No. | Description |
|--|--|
| BE AP-1985V-SHOT | For John Deere 2005 to Present* |
| BE AP-1985V-SHOTG | For Tough Soil John Deere 2005 to Present ** |
| BE AP-9885V-SHOT | For Case/IH 1200 Series and Later..... |
| BE AP-4985V-SHOT | For Kinze 4000 Series Planters |
| BE AP-7100V-SHOT | For Kinze 2000 & Early John Deere ME 7000/7100 |
| * Designed for XP, XP Pro & MaxEmerge® 5 ME5 Row Units - Does NOT Fit Exact Emerge. | |
| ** Same AS 1985V-SHOT But Shorter Version is for Tough Soil and Does NOT Hang as Far Below the Blades as 1985V-SHOT. | |

WE APPRECIATE YOUR
BUSINESS!



ShieldAg/Acra-Plant Chrome Carbide “Sweeps & Points”


Acra Replacement Point for Orthman *The Best Just Got Better!*

This point is a direct replacement for Orthman p/n 164-054 & 164-057. Create more lift and fracture of the soil for enhanced strip-till results. Reduced wear on the OEM shank. The “Diamond” nose is of a new design taken from the standard ShieldAg ST-series knives – designed to increase wear life.

The design of the mole foot (and fin) will reduce sidewall compaction and essentially eliminate any gully-washing down the strip-tilled row. Which leaves no need to worry about heavy rains within a week or two of the strip-till pass.

Note: Shank/Knife must mount perpendicular to soil to avoid knife wear and/or breakage.

| Part No. | Description |
|--------------|---|
| BE AP-800106 | 2-3/4” 2-Hole Mount with Hardware - No Shims..... |



AP-800106

13808 Industrial Road
Omaha, NE 68137
1-800-228-9666 • 1-402-333-1444
FAX: 1-402-333-5546

email: dultmeier@dultmeier.com
website: dultmeier.com



601 West 76th St.
Daveport, IA 52806
1-800-553-6975 • 1-563-386-0930
FAX: 1-563-386-5448

WE APPRECIATE YOUR
BUSINESS!



Great Customer Service

“I called and talked with a representative about fertilizer attachment for our planter and they worked with me to assure that I ordered the correct fittings. Great service, the parts arrived sooner than promised.”

Kent