



wilo® Submersible Sewage / Wastewater Pumps


Rexa PRO

This heavy-duty line of submersible sewage pumps offers superior quality paired with detail-oriented, German engineering. The **Rexa PRO Series** of sewage pumps is a solid choice for wastewater and sewage water applications. This series can produce flow rates up to 550 GPM with a maximum of 110 feet of head. **Not all models shown.**



Features:

- Electrical Connections: 1PH - 230V / 3PH - 230V / 3PH - 460V
- Solids Passage up to 3"
- Maximum Immersion Depth: 66 feet
- Sludges up to 8% Dry Matter
- Clog-Resistant Vortex Impeller
- FM Explosion-Proof Rated Motor
- Dual Mechanical Shaft Seals
- Wet Pit Only Installation
- Buna-Nitrile Seals are Standard with Silicon Carbide Seal Faces
- Cast Iron Housing
- 40ft power cord supplied
- Thermal and Moisture sensor cables included

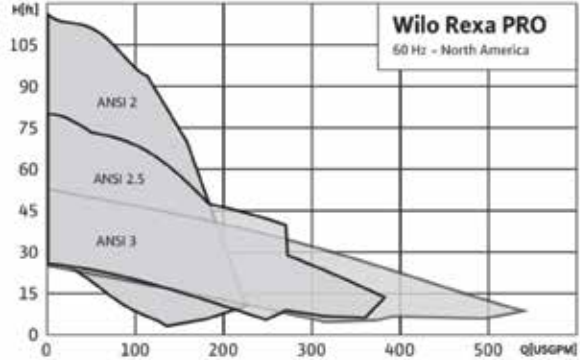

Part No.	Port Size	Motor	Flow Rate	Shut Off	Wt.
WO 6073267	2" ANSI Flange	2 HP/230V/3PH	140 GPM @ 10'	39'	103 lbs.
WO 6073277	2-1/2" ANSI Flange	2 HP/230V/3PH	300 GPM @ 8'	30'	132 lbs.
WO 6073281	2-1/2" ANSI Flange	5 HP/230V/3PH	350 GPM @ 16'	43'	141 lbs.
WO 6073283	3" ANSI Flange	3.5 HP/230V/3PH	400 GPM @ 16'	42'	155 lbs.
WO 6073285	3" ANSI Flange	5 HP/230V/3PH	450 GPM @ 15'	48'	160 lbs.

CALL for CURRENT PRICING

Pump Base, Guide Rail Systems & Wet Pit Elbow Kits Available

Rexa CUT

The **Rexa CUT Series** is an ideal choice for pressure sewer applications – either municipal or industrial – when pumping water containing sewage. The unique cutter design yields fine solids for non-clogging operation. This unit is highly resistant to obstructions and blockages. The **Rexa CUT Series** tops out at 95 GPM with a max head of 140 feet.

Features:

- 304SS Motor Housing
- Standard Buna-Nitrile Seal with Silicon-Carbide/ Silicon-Carbide Heavy Duty Seal Face
- Submerged Operating Mode: Continuous Duty
- Power Connection Options: 1 PH, 230V, 60Hz / 3 PH, 230V, 60Hz / 3 PH, 460V, 60Hz
- Maximum Solid Passage in this series is 1.5"
- Power Cord Supplied

Part No.	Port Size	Motor	Flow Rate	Shut Off	Wt.
WO 6082811	1-1/2" ANSI Flange	3 HP/3 PH/460V	80 GPM @ 30'	95'	72 lbs.
WO 6082815	1-1/2" ANSI Flange	3 HP/3 PH/230V	80 GPM @ 30'	95'	72 lbs.
WO 6082813	1-1/2" ANSI Flange	3 HP/3 PH/230V	85 GPM @ 30'	100'	72 lbs.
WO 6082810	1-1/2" ANSI Flange	5 HP/3 PH/460V	78 GPM @ 60'	140'	81 lbs.
WO 2767377	Capacitor Kit, 1PH, Start-Run, 35mf				

CALL for CURRENT PRICING



Stands & Guide Rails Sold Separately - Call for Specifications
Pump Base & Guide Rail Systems Available Upon Request


FA Series

This pump series is the largest capacity wastewater and sewage pump line that **WILO** offers. With flow rates capable of up to 40,000 GPM this pump is designed to serve the following industries: sewage collection, storm water, raw water, sewage treatment, dewatering, and other various industrial application.



Features:

- Maximum Flow: 40,000 GPM
- Maximum PSI: 181
- Dry or Wet Pit Installation Options Available
- Silicon Carbide Mechanical Seals (*Buna Standard*)
- HP: 3/4 - 1000
- Discharge Ports: 2" – 24"
- Maximum Temperature: 104° F
- Special Ceram® Ceramic Coatings
- Special Materials: Stainless Steel, High Chrome Cast Iron, Ductile Cast Iron
- Cast Iron Volute with Stainless Steel Shaft is Standard
- Solids passage up to 7" in Diameter

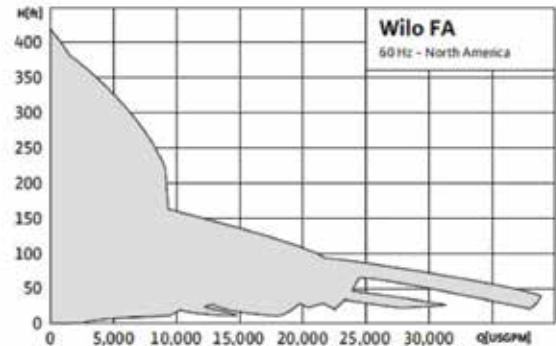

Call With System Specifications for Pump Sizing and Pricing