




Large Hose Reels Series 6000, 8000 & 9000

Larger Size Hannay Reels for 3/4" to 3" hose. Available in hand crank with pinion brake or 12 volt electric with comet brake (24VDC, 115VAC, Air & Hydraulic Drives available). 90° ball bearing swivel inlets included. **6000 Series** to 1,000 PSI & 250° F., AFLAS seals; **8000 Series** to 600 PSI & 175° F., Aflas seals; **9000 Series** to 300 PSI & 225° F., Viton® seals; **6000 & 8000 Series** include steel inlet swivel, riser outlet & drum. **9000 Series** include ductile iron inlet swivel with aluminum riser outlet & drum (other materials available). 12 volt reels are supplied with switch & solenoid. Clutch/gear reduction units are included on 8000 & 9000 Series (required). **Standard in "Right Top" configuration: Motor & inlet on right, top wind. Right Bottom, Left Top & Left Bottom configurations are also available.**

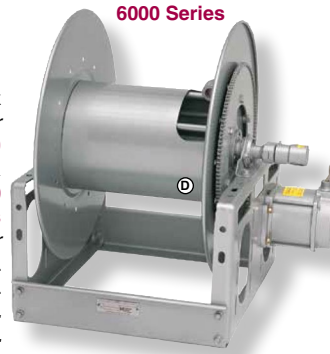

6000 Series



8000 Series



9000 Series

MODEL NO.	HOSE CAPACITIES IN FEET						MAX. DIMENSIONS			
	I.D. 3/4"	I.D. 1"	I.D. 1-1/2"	I.D. 2"	I.D. 3"	Inlet	Outlet	*LONG	DEEP	HIGH
HN 6024-30-31	400'	200'	—	—	—	1"	1"	28-3/4"	28-3/4"	30"
HN 6028-33-34	600'	350'	—	—	—	1"	1"	32-3/4"	31-3/4"	33-3/4"
HN 8238-39-40	—	—	340'	225'	—	2"	2"	38-3/4"	39"	40"
HN 9334-45-46	—	—	—	200'	115'	3"	3"	36-1/4"	45"	48"

* Length shown is longest of hand crank or 12V reel for each model.

Part No.	Hose Size I.D.	Rewind	Ship Wt.
HN 6024-30-31	3/4" & 1"	Hand	163 lbs
HN E6024-30-31	3/4" & 1"	12 Volt	203 lbs
HN 6028-33-34	3/4" & 1"	Hand *	179 lbs.
HN E6028-33-34	3/4" & 1"	12 Volt *	219 lbs.
HN 8238-39-40	1-1/2" & 2"	Hand	420 lbs
HN E8238-39-40	1-1/2" & 2"	12 Volt	460 lbs
HN 9334-45-46	2", 2-1/2" & 3"	Hand	525 lbs.
HN E9334-45-46	2", 2-1/2" & 3"	12 Volt	565 lbs.

Other sizes & seals are available in each Series including stainless models. **Note:** Use flexible connector between inlet pipe & inlet swivel joint (or hose). Hoses also available, if required.



Large Hose Reels

For 2" & 3" Hose

Manual & 12V with Remote Controls

Super Reel™ Hose Reels are excellent for efficient and easy transfer of water and fertilizers through large 2" and 3" hoses. Great for farm, ranch, turf and other applications. All models include stainless steel swivels and non-corrosive top, bottom and side hose guide rollers. All 12-volt models include built-in hand switch and remote key fob for power in and power out reeling. **Not for use with fuels or oils.**

FEATURES:

- Heavy-Duty Steel Construction with Powder Coat Finish
- Stainless Steel Swivel with FPT Inlet/Outlet
- 12 Volt Motor with Built-On Switch & One Key FOB Remote Control
- Vacuum Rating: 28" Hg
- Manual Clutch Lockout for Easy Pull-Out
- Non-Corrosive Guide Rollers
- Viton® Seals
- Chain Guard
- Manual Crank Handle Included On All Models



Part No.	Hose Size I.D.	Rewind	Ship Wt.
FS HR200SS	2" & 2"	Manual	150 lbs
FS HRE200SS	2" & 2"	12 Volt	150 lbs
FS HRE300SS	3" & 3"	12 Volt	255 lbs.
FS CHR11216	Wireless Switch & Receiver Assy. for Electric Reels		
FS CHR1121	Additional Key Fob Remote Control.....		
DU 1AB2	2" Air Blowout Elbow Kit*		
DU 1AB3	3" Air Blowout Elbow Kit*		

* Each Kit includes (1) Poly Port Flange Elbow with 1/4" Gauge Port, (1) Flange by FPT Adapter, (1) Flange Clamp, (1) EPDM Gasket - for connection to hose reel inlet.



CHR1121 Key FOB Remote
(One Key Fob Included with All Electric Models)

MODEL NO.	HOSE CAPACITIES IN FEET		DIMENSIONS				
	Hose I.D. 2"	Hose I.D. 3"	Inlet	Outlet	Length	Width	Height
FS HR200SS	75'	—	2"	2"	30"	31"	27"
FS HRE200SS	75'	—	2"	2"	30"	31"	27"
FS HRE300SS	100'	75'	3"	3"	41"	31"	39"

* Manual Crank Handle Adds 5" to Overall Width.

Important: Air blowout recommended for 2" and 3" hoses before rewinding. Blowout Kits optional.

Viton® is a registered trademark of DuPont Performance Elastomers