


TeeJet FoamJet Nozzles

These nozzles are designed to produce a low pressure aerated foam when used with detergent solutions. Available in plastic, brass and stainless steel. Great for soap or presoak arches. Air induction process pulls air into the chemical flow to create foam. Nozzles are available individually or in an assembly with diaphragm check valve and cap. Available in 20°, 40°, 65° and 80° patterns.

FJP Nozzles are Celcon plastic construction. Flat back design has no threads and must be held in place with nozzle bodies and caps shown on this page. Rated to 150 psi.

MEF Nozzles are stainless steel construction. Inlet is 1/4" MPT. Rated to 3000 psi.

NOTE: In order to make the FJP or FJ Nozzles into a check valve/nozzle assembly, order FJ or FJP nozzle of choice, 8360NYB check valve and 18032ANY wing cap.

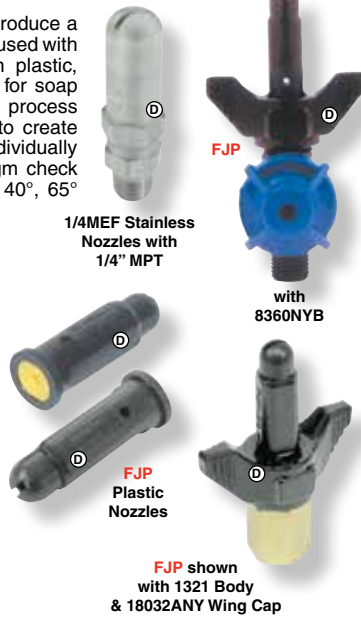

Part No.	Body	Orifice	Water Spray Angle	Foam Spray Angle
SS FJP2002CE	Plastic	02	20	40
SS FJP2003CE	Plastic	03	20	40
SS FJP2004CE	Plastic	04	20	40
SS FJP2005CE	Plastic	05	20	40
SS FJP2006CE	Plastic	06	20	40
SS FJP2010CE	Plastic	10	20	40
SS FJP4002CE	Plastic	02	40	75
SS FJP4003CE	Plastic	03	40	75
SS FJP4004CE	Plastic	04	40	75
SS FJP4005CE	Plastic	05	40	75
SS FJP4006CE	Plastic	06	40	75
SS FJP4008CE	Plastic	08	40	75
SS FJP4010CE	Plastic	10	40	75
SS FJP6503CE	Plastic	03	65	85
SS FJP6505CE	Plastic	05	65	85
SS FJP6508CE	Plastic	08	65	85
SS FJP8002CE	Plastic	02	80	105
SS FJP8003CE	Plastic	03	80	105
SS FJP8004CE	Plastic	04	80	105
SS FJP8006CE	Plastic	06	80	105
SS FJP8008CE	Plastic	08	80	105
SS FJP8010CE	Plastic	10	80	105
SS 1/4MEF4005	SS	05	40	75
SS 1/4MEF4006	SS	06	40	75
SS 1/4MEF4007	SS	07	40	75
SS 1/4MEF4008	SS	08	40	75
SS 1/4MEF4010	SS	10	40	75
SS 18032ANY	Wing Cap			
SS 8360NYB	Diaphragm Check Valve, 1/4" MPT			

Foaming QuickJet Nozzles

QuickJet Foam Nozzles mix surrounding air with premixed chemicals to generate medium to medium fine foam without the need for compressed air. Designed to be used with Quick attach bodies or check valves for automatic alignment (shown on other pages). Can be easily attached and removed for cleaning when needed. Great for soap, presoak or wax arches. All nozzles feature blue nylon body, color coded orifice insert and EPR gasket.



Part No.	Pattern	Orifice	GPM @ 60 PSI	Insert
SS QJFJP4002	40°	2.0	.24	Yellow
SS QJFJP4003	40°	3.0	.37	Blue
SS QJFJP4004	40°	4.0	.49	Red
SS QJFJP4005	40°	5.0	.61	Brown
SS QJFJP4006	40°	6.0	.73	Gray
SS QJFJP4008	40°	8.0	.98	White
SS QJFJP8002	80°	2.0	.24	Yellow
SS QJFJP8003	80°	3.0	.37	Blue
SS QJFJP8004	80°	4.0	.49	Red
SS QJFJP8005	80°	5.0	.61	Brown
SS QJFJP8006	80°	6.0	.73	Gray
SS QJFJP8008	80°	8.0	.98	White




ProMax Quick Attach Nozzles

ProMax Nozzles from *Spraying Systems* are an ideal choice for use in high maintenance spraying operations. These quick attach nozzles are designed to fit QPPA bodies with 1/4", 3/8" or 1/2" MPT threads. Easy-to-remove and install for cleaning or replacement.

Note: QPPA nozzles can only be used with QPPA bodies.

FEATURES:

- Quarter-turn wing design easily removes and installs in seconds.
- Automatic alignment feature.
- Flat fan, tapered edge pattern with uniform spray distribution.
- Operating pressure to 220 PSI.
- Special grade polypropylene construction for added chemical resistance.
- Internal Viton® O-Ring provides positive seal between body and nozzle.
- Variety of spray patterns and orifice ranges.
- Color-coded for easy identification of flow rates.
- All nozzles have internal O-Rings but **Optional External O-Ring** offers additional protection from contaminants if needed.
- Smaller QMVV nozzles with lower flow rates are available on special order.

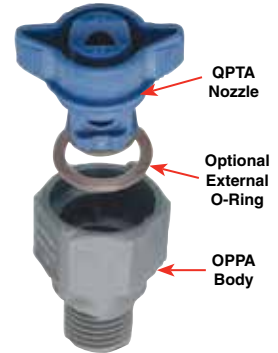

QPPA Spray Tip Orange
3.0 GPM @ 43 PSI
Use with QPPA Body



QPPA Spray Tip Yellow
5.0 GPM @ 43 PSI
Use with QPPA Body



QPPA Spray Tip Red
7.0 GPM @ 43 PSI
Use with QPPA Body

NOZZLES

Part No.	Color	Flow @43 PSI	Pattern
SS QPPA2510	White	1.0 GPM	25°
SS QPPA2515	Gray	1.5 GPM	25°
SS QPPA2520	Black	2.0 GPM	25°
SS QPPA2530	Orange	3.0 GPM	25°
SS QPPA2540	Green	4.0 GPM	25°
SS QPPA2550	Yellow	5.0 GPM	25°
SS QPPA2560	Blue	6.0 GPM	25°
SS QPPA2570	Red	7.0 GPM	25°
SS QPPA4010	White	1.0 GPM	40°
SS QPPA4015	Gray	1.5 GPM	40°
SS QPPA4020	Black	2.0 GPM	40°
SS QPPA4030	Orange	3.0 GPM	40°
SS QPPA4040	Green	4.0 GPM	40°
SS QPPA4050	Yellow	5.0 GPM	40°
SS QPPA4060	Blue	6.0 GPM	40°
SS QPPA4070	Red	7.0 GPM	40°
SS QPPA8010	White	1.0 GPM	80°
SS QPPA8015	Gray	1.5 GPM	80°
SS QPPA8020	Black	2.0 GPM	80°
SS QPPA8030	Orange	3.0 GPM	80°
SS QPPA8040	Green	4.0 GPM	80°
SS QPPA8050	Yellow	5.0 GPM	80°
SS QPPA8060	Blue	6.0 GPM	80°
SS QPPA8070	Red	7.0 GPM	80°

* Discount for 36 or 100 of a Size.

BODIES

Part No.	Description
SS 1/4QPPA	1/4" MPT Polypropylene Body..
SS 3/8QPPA	3/8" MPT Polypropylene Body..
SS 1/2QPPA	1/2" MPT Polypropylene Body..
SS CP7717-2/17-VI	Optional External Viton® O-Ring...