



**REELCRAFT**

## Power Cord Reels

**Spring Rewind Power Cord Reels** have a compact design for critical space requirements. Corrosion-resistant, baked-on finish. Can be mounted to wall, ceiling or bench. Supplied with 4' inlet cord, power cord, hose guide and cord stop.

L4050-1633

Part No.	Cord Length	Rating	Wt.
RF L4050-1633	50'	13 Amp / 115 volt	26 lbs.
RF L4545-1233	45'	15 Amp / 115 Volt	28 lbs.
RF L4545-1233A	45'	20 Amp / 125 Volt	29 lbs.

**REELCRAFT**

## Light Cord Reel

**Spring Rewind Light Cord Reels** have a compact design for critical space requirements. Corrosion-resistant, baked-on finish. Can be mounted to wall, ceiling or bench. Supplied with 4' inlet cord, 35' power cord, hose guide and cord stop. Available with either incandescent or LED lights. Rated for 125 volt, 60 hz, single phase power. U.L. listed. For indoor use only.



Part No.	Cord Length	Light Type	Wt.
RF L4035-1622	35'	LED	25 lbs.

## Hand Carry Hose Reels

These reels are ideal for use with jetting machines, pressure washers or carpet solution hose. Rated to 5,000 PSI and 250° F.

**DHRHC50100** is a powder-coated steel reel with stainless base and handle. Capacity is 150' of 1/4" or 100' of 3/8" hose.

**DHRHC50150SS** is an all-stainless reel and frame. Capacity is 200' of 1/4" or 150' of 3/8" hose.

**2100012** optional jetter valve package includes valve, gauge, bracket and 3 jetter nozzles.



Part No.	Description	Wt.
IP DHRHC50100	Power Coat	24 lbs.
IP DHRHC50150SS	Stainless	24 lbs.
IP 2100012	Jetter Valve add on kit	3 lbs.

WE APPRECIATE YOUR  
**BUSINESS!**

**REELCRAFT**

## Stainless Steel Spring Rewind Reels




7800OLS

**Corrosion-Resistant, Stainless Spring Rewind Hose Reels** from Reelcraft. Ideal for use in food processing, wash down, industrial use, off-shore and on board marine applications or anywhere harsh environments require stainless construction. Swivels with Viton® o-rings are standard. Rated to 500 PSI and 210° F. (Hoses are not included).



Part No.	Hose Capacity	Maximum Pressure	Wt.
RF 7800OLS	1/2" x 50'	500 PSI	41 lbs.
RF 8200OLS	1/2" x 100'	500 PSI	81 lbs.
RF D8300OLS	3/4" x 75'	500 PSI	84 lbs.
RF D8400OLS	1" x 50'	500 PSI	92 lbs.

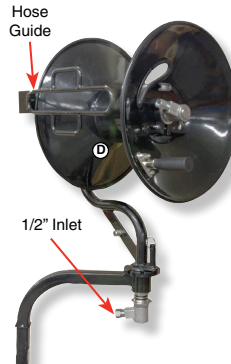

## Pivot Style Hose Reel

**Pivoting Hose Reel** has 360° rotation to follow and track with operator movement. Direct hand crank with locking pin and lever brake. Solid steel construction with powder coated finish. Adjustable hose guide. Rated to 5000 PSI and 250° F. Capacity is 200 ft. of 3/8" hose. Lower arm base is 1-1/4". Inlet is 1/2" FPT.

Part No.	Capacity	Wt.
IP DHRTM50100	3/8" x 100'	33 lbs.
IP DHRTM50200	3/8" x 200'	35 lbs.
IP DHRUM	Clamp Kit, Wall or Pipe .....	
IP DHRFM	Trailer Mount Kit .....	

## High Pressure Hose Reels

**High Pressure Hose Reels** are ideal for floor mount or frame mounting on pressure washers. Black, powder-coated finish. Hose guide is a standard feature for ease of use. Rated to 5,000 PSI. and 212° F. Swivel is 3/8" FPT. Locking pin is included.



Part No.	Capacity	Wt.
FN 80225	3/8" x 100'	24 lbs.
FN 80226	3/8" x 200'	31 lbs.

### DHRUM Mounting Positions

