

Radiant Infrared Heaters


2-Stage - Propane or Natural Gas Fired



HL3 Two-Stage Heaters from *Re-Verber-Ray* represent the most energy-efficient infrared tube heaters. Designed for the rigors of commercial and industrial heating needs. The highest quality materials and construction features ensured years of reliable and efficient operation.

Two-Stage Heaters fire at two different btu ranges, (65% and 100% of rating) which allows for gas savings and added performance. Straight or U-Tube styles from 22' to 70' and 65,000 to 200,000 btu.

All Models Include: Patented, 2-Stage operation • Coated aluminized tubes, * (Stainless available in some models) • Polished aluminum reflectors, (stainless available in some models) • 120 Volt, 60 hz, 1 phase operation • Designed for use with optional 24 volt thermostats for dry or wet environments • 24" Stainless flexible gas connector with brass gas valve • tool-free access to controls • ABS plastic air intake for connection to 4" PVC or DWV pipe from roof or sidewall • Reflector end caps • Serviceability while units are operating • Natural gas or propane fired • Optional wall or ceiling vents and hanger kits as required • Minimum gas pressure requirements: 5" natural gas, 11" LP gas • CSA, IAS Indoor rated or outdoor rated with addition of OD kit • 4" x 10' x 16 ga. tube construction • 10 Year warranty on burners, 5 Year on tubes & 1 Year on components.

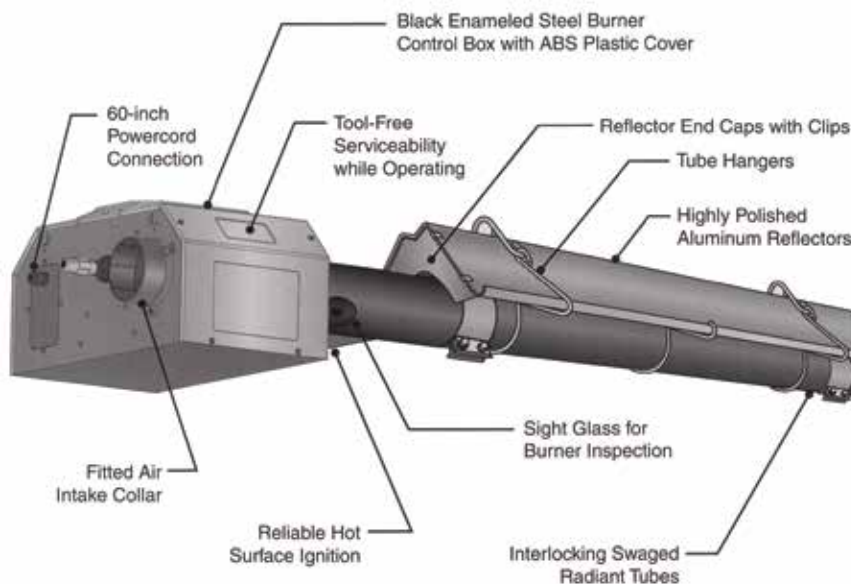

HL3 SERIES



Straight Tube Models

Part No.	Length	High Fire	Low Fire	Tube	Mount Height	Wt.
DT HL3-20-75S	* 21' 9"	75,000 Btu	50,000 Btu	Straight	10' - 15'	120 lbs.
DT HL3-30-75S	* 31' 5"	75,000 Btu	50,000 Btu	Straight	11' - 18'	160 lbs.
DT HL3-30-100S	* 31' 5"	100,000 Btu	65,000 Btu	Straight	11' - 18'	160 lbs.
DT HL3-30-125S	* 31' 5"	125,000 Btu	82,000 Btu	Straight	11' - 18'	160 lbs.
DT HL3-40-75S	* 41' 1"	75,000 Btu	50,000 Btu	Straight	11' - 18'	190 lbs.
DT HL3-40-100S	* 41' 1"	100,000 Btu	65,000 Btu	Straight	12' - 20'	190 lbs.
DT HL3-40-125S	* 41' 1"	125,000 Btu	82,000 Btu	Straight	13' - 23'	190 lbs.
DT HL3-40-150S	* 41' 1"	150,000 Btu	100,000 Btu	Straight	14' - 25'	190 lbs.
DT HL3-40-175S	41' 1"	175,000 Btu	125,000 Btu	Straight	15' - 27'	190 lbs.
DT HL3-50-125S	* 50' 9"	125,000 Btu	82,000 Btu	Straight	15' - 27'	235 lbs.
DT HL3-50-150S	* 50' 9"	150,000 Btu	100,000 Btu	Straight	15' - 27'	235 lbs.
DT HL3-50-175S	* 50' 9"	175,000 Btu	125,000 Btu	Straight	16' - 30'	235 lbs.
DT HL3-50-200S	* 50' 9"	200,000 Btu	145,000 Btu	Straight	17' - 35'	235 lbs.
DT HL3-60-150S	* 60' 5"	150,000 Btu	100,000 Btu	Straight	16' - 30'	265 lbs.
DT HL3-60-175S	* 60' 5"	175,000 Btu	125,000 Btu	Straight	16' - 30'	265 lbs.
DT HL3-60-200S	* 60' 5"	200,000 Btu	145,000 Btu	Straight	17' - 35'	265 lbs.
DT HL3-70-175S	* 70' 1"	175,000 Btu	125,000 Btu	Straight	19' - 42'	300 lbs.
DT HL3-70-200S	* 70' 1"	200,000 Btu	145,000 Btu	Straight	19' - 42'	300 lbs.

* These Models Available in HL2 All Stainless Construction - CALL for DETAILS.

U-Tube Models

Part No.	Length	High Fire	Low Fire	Tube	Mount Height	Wt.
DT HL3-20-75U	13' 1"	75,000 Btu	50,000 Btu	U Style	10' - 15'	120 lbs.
DT HL3-30-75U	17' 9"	75,000 Btu	50,000 Btu	U Style	11' - 18'	160 lbs.
DT HL3-30-100U	17' 9"	100,000 Btu	65,000 Btu	U Style	12' - 20'	160 lbs.
DT HL3-30-125U	17' 9"	125,000 Btu	82,000 Btu	U Style	13' - 23'	160 lbs.
DT HL3-40-75U	22' 9"	75,000 Btu	50,000 Btu	U Style	11' - 18'	190 lbs.
DT HL3-40-100U	22' 9"	100,000 Btu	65,000 Btu	U Style	12' - 20'	190 lbs.
DT HL3-40-125U	22' 9"	125,000 Btu	82,000 Btu	U Style	13' - 23'	190 lbs.
DT HL3-40-150U	22' 9"	150,000 Btu	100,000 Btu	U Style	14' - 25'	190 lbs.
DT HL3-40-175U	22' 9"	175,000 Btu	125,000 Btu	U Style	15' - 27'	190 lbs.
DT HL3-50-125U	27' 5"	125,000 Btu	82,000 Btu	U Style	15' - 27'	235 lbs.
DT HL3-50-150U	27' 5"	150,000 Btu	100,000 Btu	U Style	15' - 27'	235 lbs.
DT HL3-50-175U	27' 5"	175,000 Btu	125,000 Btu	U Style	16' - 30'	235 lbs.
DT HL3-50-200U	27' 5"	200,000 Btu	145,000 Btu	U Style	17' - 35'	235 lbs.
DT HL3-60-150U	32' 5"	150,000 Btu	100,000 Btu	U Style	16' - 30'	265 lbs.
DT HL3-60-175U	32' 5"	175,000 Btu	125,000 Btu	U Style	16' - 30'	265 lbs.
DT HL3-60-200U	32' 5"	200,000 Btu	145,000 Btu	U Style	17' - 35'	265 lbs.
DT HL3-70-175U	37' 3"	175,000 Btu	125,000 Btu	U Style	19' - 42'	300 lbs.
DT HL3-70-200U	37' 3"	200,000 Btu	145,000 Btu	U Style	19' - 42'	300 lbs.

Call Toll Free For Prices



Accessories for All HL3 Heaters

Part No.	Description
DT ETD-5M	2-Stage Thermostat, Dry Environments.....
DT TH109	2-Stage Thermostat, Wet Environments.....
DT THCS	5' Chain/Hook Set, One Required for Every 10' Tube Section and 3 Per Burner Box.....
DT 4DSK	4" Side Wall Vent Kit Up to 175,000 Btu.....
DT RTVP4	4" Roof Vent Kit.....
DT BVP4	4" x 60" Vent Pipe, Double Wall.....
DT WIV4	4" Combustion Air Intake, Sidewall Cap.....

