

Softwash Products


Pumps, Reels, Hose and Valves for Softwash Roof and Siding Cleaning.

Products are designed for the rigors of Softwash applications for the control of algae, lichen and moss.

Wide Pattern Spray Wand

This unique spray wand creates a 45 degree coverage pattern using a *Bominator* nozzle which is included. Saves time and conserves chemical use while spraying.

Great option for use with Softwash products, Deicing solutions, Concrete Sealants, Herbicides, Pesticides, Dust suppression and more. Coverage ranges from 2' to 17' at 36" from surface. Inlet is 1/2" female. Swivels for 3/8" or 1/2" hose are optional.

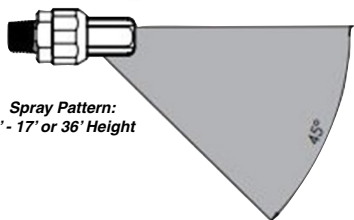

Part No.	GPM	PSI	Wt.
UD HBA1250	2.0	50 PSI	2 lbs.
UD HBA1400	3.0	50 PSI	2 lbs.
UD HBA1870	4.0	50 PSI	2 lbs.
UD 7016.00	3/8" HB x 1/2" Male Swivel		
UD 7016.01	1/2" HB x 1/2" Male Swivel		

Softwash Spray Wand

Designed for corrosive Softwash solutions for roof and siding cleaning. Trigger lock and comfortable grip for operator comfort. 24" Wand extension for extended reach. Rated to 13.2 GPM and 217 PSI. Inlet is 1/2" FPT. Outlet is 1/4" quick coupler.



Part No.	Description	Flow	Pressure
MV SWG13	Spray Wand	13.2 GPM	217 PSI

High Flow Spray Wand



High Flow Spray Wand from *Suttner*. Chemical resistant with stainless steel construction. Ideal for a range of applications including hydro excavation, soft wash, food grade rated. 1/2" ports with built in swivel inlet. Easy pull design reduces trigger force by up to 60%. Rated to 21 GPM, 1800 PS, 300° F.



Part No.	Flow	Pressure	Wt.
NP ST2320	21 GPM	1800 PSI	1.70 lbs

JRod Nozzle Holder

Stainless 4-Way JRod Nozzle Holder is an ideal way to easily change nozzles from chemicals to rinse in soft wash applications. Allows for quick changeover without removing nozzles on your trigger wand or extensions.

LT4 is a nozzle holder only, no nozzles. Features (4) 1/4" quick connect inlets with 1/4" FPT outlets. (*A variety of nozzles available to meet your specific requirements*).

LT4NO is a nozzle holder with 0040, 0010, 2540 and 2515 stainless nozzles for high/low soap and high/low rinse.

S14M stainless QC coupler attaches to your trigger wand for connection to LT4 or LT4NO.



Part No.	Description
DU LT4	4-Way Nozzle Holder, No Nozzles
DU LT4NO	4-Way Nozzle Holder With Nozzles
KH S14M	1/4" MPT Stainless Quick Coupler

Softwash Trigger Guns

These trigger spray wands are commonly used by the Softwash Industry. Chemical-resistant plastic handles with 1/2" FPT ports for high flow applications.

ST510 is polypropylene and rated to 8 GPM and 360 PSI. 1/2" Ports.

2919037 is a reinforced polypropylene wand rated to 18 GPM and 700 PSI. 1/2" Ports.



Part No.	Flow	Pressure
NP ST510	8 GPM	360 PSI
UD 2919037	18 GPM	700 PSI

Softwash Trigger Wand & Nozzle Assembly

Complete Polypropylene Trigger Spray Wand Package with 1/2" x 24" PVC wand extension, stainless quick coupler. JRod nozzle holder and 2515, 2540, 0010 and 0040 stainless nozzles. Rated up to 700 PSI.



Part No.	Description	Maximum Pressure
DU SW24LT	Spray Wand with JRod Complete	700 PSI

Viton® is a registered trademark of DuPont Performance Elastomers