


**Brass Lever Valves**

**Quick Opening, Full-Port Lever Valves** are ideal for vacuum trucks, honey wagons, etc. Durable brass construction. Available in 2" to 6" female x female NPT threads or in 4" flange x female NPT. 2" to 6" Valves are rated to 45 PSI. 6" Valves are rated to 22 PSI.

**H Series Valves** feature ports for warm solution to flow through valve to prevent freeze up.

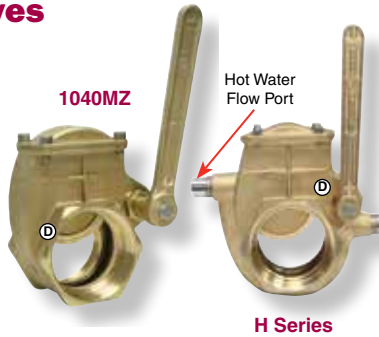

Part No.	Inlet	Outlet	Brand	Wt.
CB 1039MZ	2" FPT	2" FPT	MZ	4 lbs.
CB 1039RIV	2" FPT	2" FPT	RIV	4 lbs.
CB 1040MZ	3" FPT	3" FPT	MZ	9 lbs.
CB 1040RIV	3" FPT	3" FPT	RIV	9 lbs.
CB 1041MZ	4" FPT	4" FPT	MZ	15 lbs.
CB 1041RIV	4" FPT	4" FPT	RIV	15 lbs.
CB 1041-000H	* 4" FPT	4" FPT	MZ	15 lbs.
CB 1041FL	4" Flange	4" FPT	MZ	15 lbs.
CB 1060MZ	6" FPT	6" FPT	MZ	27 lbs.
CB 1060RIV	6" FPT	6" FPT	RIV	27 lbs.
CB 1060-000H	* 6" FPT	6" FPT	MZ	27 lbs.

\* Flow Chamber Ports

**Brass Piston Valves**

**Heavy-Duty, Brass Piston Valves** with or without air or hydraulic cylinders. Available in 4" or 6" female NPT threads or in 4", 6" or 8" with flanged ports.

FPT x FPT Style



New improved design features a thicker gate to eliminate annoying leaks. FPT valves are rated to 60 PSI. Flange valves are rated to 45 PSI on 4" and 6" and 22 PSI on 8".

Flange x Flange Style



**NOTE:** "H" in the part number is for Hydraulic in this section. Different from above.

**Piston Valves (FPT x FPT)**

Part No.	Ports	Wt.
CB 1045	4" FPT Piston Valve Only	13 lbs.
CB 1045A	4" FPT Valve with Air Cylinder	21 lbs.
CB 1045H	4" FPT Valve with Hydraulic Cylinder	21 lbs.
CB 1046	6" FPT Piston Valve Only	20 lbs.
CB 1046H	6" FPT Valve with Hydraulic Cylinder	29 lbs.

**Piston Valves (Flange x Flange)**

Part No.	Ports	Wt.
CB 2003	4" Flange Piston Valve Only	13 lbs.
CB 2003A	4" Flange Valve with Air Cylinder	21 lbs.
CB 2003H	4" Flange Valve with Hydraulic Cylinder	21 lbs.
CB 2002	6" Flange Piston Valve Only	19 lbs.
CB 2002A	6" Flange Valve with Air Cylinder	28 lbs.
CB 2002H	6" Flange Valve with Hydraulic Cylinder	28 lbs.
CB 2008	8" Flange Piston Valve Only	40 lbs.
CB 2008A	8" Flange Valve with Air Cylinder	50 lbs.
CB 2008H	8" Flange Valve with Hydraulic Cylinder	50 lbs.

**Brass Ball Valves**

**2-Piece - Full Port**



**FBV Series Full Flow Brass Ball Valves** are used for control of water, oil, air and gas in hose or pipe lines. For industrial and commercial applications.

**Quantity Discount Available On Some Sizes.**


Part No.	Body	FPT Size
EV FBV25	Brass	1/4"
EV FBV38	Brass	3/8"
EV FBV50	Brass	1/2"
EV FBV75	Brass	3/4"
EV FBV100	Brass	1"
EV FBV125	Brass	1-1/4"
EV FBV150	Brass	1-1/2"
EV FBV200	Brass	2"
EV FBV250	Brass	* 2-1/2"
EV FBV300	Brass	* 3"
EV FBV400	Brass	* 4"

**Standard Features Include:**

Brass bodies, blow out proof, chrome plated stem balls, and plated steel handles. Ratings are 600 PSI WOG. Rated to +250° F.

\* 400 PSI on 2-1/2" - 4"

**Full Flow Brass Ball Valves**

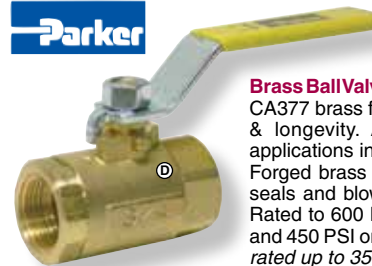

**600 PSI**

**Brass Ball Valves** from Parker. Constructed from CA377 brass forgings for enhanced endurance & longevity. An ideal choice for industrial applications including gasoline and diesel fuel. Forged brass body, chrome-plated ball, PTFE seals and blow-out proof stems are standard. Rated to 600 PSI at 200° F. on 1/4" to 1" sizes and 450 PSI on 1-1/4" to 2" sizes. (All valves are rated up to 350° F. at lower pressures).

Part No.	FPT Ports	Maximum PSI
PA XV500P4	1/4"	600
PA XV500P6	3/8"	600
PA XV500P8	1/2"	600
PA XV500P12	3/4"	600
PA XV500P16	1"	600
PA XV500P20	1-1/4"	*600
PA XV500P24	1-1/2"	*600
PA XV500P32	2"	*600

\* Rated to 600 PSI at 100° F. or 450 PSI at 200° F.

**Polypropylene Ratchet Valves**

These valves include a "quick open", "quick close" feature to be used with a rope. Excellent resistance to agricultural chemicals, acids and caustic solutions. Ball, body, shaft and end caps are glass-filled polypropylene. O-ring shaft seal is Viton®. S.S. position indicator and ratchet handle are stainless steel. Teflon seat. 125 PSI/W.P.



Part No.	Ports	Wt.	Net Ea.
BV 4011T-20	1-1/4" Full Port	3 lbs.	\$ 159.00
BV 4011U-20	1-1/2" Full Port	3 lbs.	159.00
BV 4011V-20	2" Standard Port	3 lbs.	159.00

**Valve Heaters**

**Valve Heaters for Lever and Piston Valves** on septic trucks or tanks. Once you try these you will wonder how you got by without them. No piping or welding changes are required to your truck. Connects to your radiator system and circulates hot water through the heater collar that surrounds the valve body. Designed for MZ and Betts valves only as noted.

Part No.	Size	Valve Type
CB VH3	3"	MZ Lever
CB VH4	4"	MZ Lever
CB VH6	4"	MZ Lever
CB VH6P1	* 4"	MZ Piston
CB VH6P2	** 4"	MZ Piston
CB VH4B	4"	Betts Piston

\* 6P1 is for MZ Piston Valves with 2-3/8" Wide Bodies.  
\*\* 6P2 is for MZ Piston Valves with 3-1/2" Wide Bodies.

