

STENNER PUMPS Peristaltic Metering Pumps

STENNER Peristaltic Pumps are designed to offer accurate dosing of chemicals and solutions to a wide variety of industrial applications. Self-priming to 25'. Roller tube design offers precise adjustable injection rates from 5 to 100% concentrations. Pressures to 100 PSI and temperatures to 125° F. Standard tubes are 1/4" O.D. (3/8" also available). Tube construction is Santoprene but Tygothane tubes are also available for petroleum products, oils and solvents.

Available in single, double and triple head designs for multiple chemicals or higher flow rates. Motors are 120V, 60Hz but 230V 50 or 60Hz are also available. Tanks are available in 7, 15 or 30 gallon sizes in translucent white or UV resistant gray. Tanks also come with grommets and mounting screws. Pre-assembled pump/tank systems are also available in many different configurations. All pumps are rated for continuous duty.



Classic 85 Series Pumps feature adjustable output from 5 to 100% in 2.5% increments with a dial gear adjustment. Six interchangeable tubes. Dimensions are 5" x 8" x 6". Rated to 100 PSI, 40 GPD and 44 RPM.

S3V Series Pumps feature adjustable output from 5 to 100% in 1% increments with a digital keypad adjustment. Six interchangeable tubes. Dimensions are 5" x 6" x 10". Rated to 100 PSI, 44 GPD and 47 RPM.

Pump/Motor Units

Part No.	Oz./Min.	Tube	Wt.
UB 85MJH1A1S	.03 - .44	Santoprene	9 lbs.
UB 85MJH2A1S	.07 - 1.51	Santoprene	9 lbs.
UB 85MJH7A1S	.18 - 3.55	Santoprene	9 lbs.

S3V Series Pump/Motor Units

Part No.	Gals./Day	Tube	Wt.
UB S3V01AA101N	5	Santoprene	9 lbs.
UB S3V02AA101N	17	Santoprene	9 lbs.
UB S3V07AA101N	40	Santoprene	9 lbs.

Tanks for Classic Series Pumps

Part No.	Gallons	Color	Wt.
UB STS7NC	7.5	White	9 lbs.
UB STS7GC	7.5	Gray	9 lbs.
UB STS15NC	15	White	19 lbs.
UB STS15GC	15	Gray	19 lbs.

Tanks for S3V Series Pumps

Part No.	Gallons	Color	Wt.
UB STS15NC	15	White	19 lbs.
UB STS15GC	15	Gray	19 lbs.
UB STS7NC	7.5	White	15 lbs.
UB STS7GC	7.5	Gray	12 lbs.

Peristaltic Injector Pumps

Peristaltic Injector Pumps are the ideal choice for injecting tough-to-handle solutions that can foul conventional Pumps with check valves. Peristaltic pumps feature rollers that compress tubes in a progressive squeezing action. Precision injection at 50-100 PSI.



A100N Standard Model

Standard Features:
 110 Volt, ball bearing motors (230 volt available)
 • self-priming, even against line pressure • Solid-state feed controller with 1 minute cycle • Chemical-resistant, thermoplastic, weatherproof housing • No valves or seals, tubes are the only wetted parts
 • Ports are designed for O.D. tubing • Pumps tubes are Norprene • Power cord and plug are standard • Rated to 5000 Centipoise and up to 110° F. • Rated for continuous duty and 50% solids by volume • Dimensions are: 6-1/8" H x 10-1/8" W x 9" D. • Ship weight is 8 lbs.

Blue-White Industries, Ltd.


Part No.	Rate Control	Max. Oz./Min.	Max. PSI	Max. Wt.
BL A1N00A6T	1 Min. % Dial	0.61	3/8"	8 lbs.
BL A1N10A6T	1 Min. % Dial	1.42	3/8"	8 lbs.
BL A1N30A6T	1 Min. % Dial	2.67	3/8"	8 lbs.
BL A1N10A7T	1 Min. % Dial	4.66	7/16"	8 lbs.

Viton® is a registered trademark of DuPont Performance Elastomers

Reclaim Pump / Motor Units

Reclaim Pumps from *Sta-Rite*. These self-priming pumps are designed for water reclaim and water-tank delivery systems. Bodies are cast iron construction, seals are Viton®. Pumps can lift water up to 25 ft. Maximum pressures to 70 psi if needed. Strainer trap packages are optional to protect pumps from harmful debris. Quick-release cover provides easy access to strainer baskets. Motors are available from 1 hp to 5 hp, 3 phase, 208/230/460 volt. (1 phase available on special order).

Note: Inlet flanges or inlet trap strainers must be ordered in addition to the pumps below in order to change pump suction port from flange to pipe thread. One or the other is required but not both.

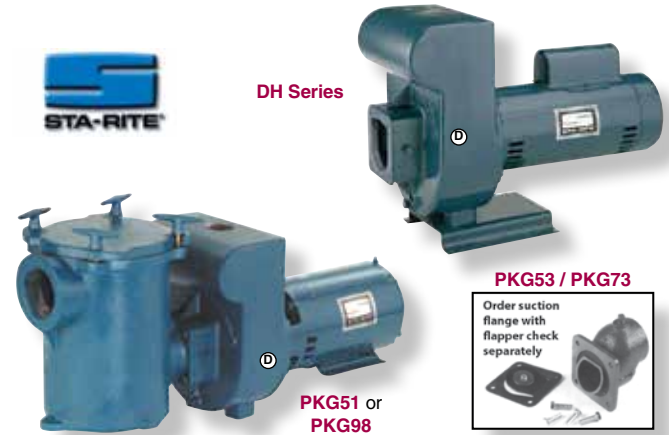

Part No.	Motor	*Performance	Discharge Port	Wt.
SA DHE3-50	1 HP / 3 PH	32 GPM @ 30 PSI	1-1/2"	65 lbs.
SA DHG3-52	2 HP / 3 PH	44 GPM @ 40 PSI	1-1/2"	113 lbs.
SA DHH3-16	3 HP / 3 PH	80 GPM @ 40 PSI	1-1/2"	144 lbs.
SA DHJ3-17	5 HP / 3 PH	140 GPM @ 40 PSI	2"	184 lbs.
SA PKG53	2" Inlet flange with flapper for (1 HP & 2 HP)			10 lbs.
SA PKG73	3" Inlet flange with flapper for (3 HP & 5 HP)			10 lbs.
SA PKG51	6" Trap with basket, 2" FPT (for 1 HP & 2 HP)			35 lbs.
SA PKG98	8" Trap with basket, 3" FPT (for 3 HP & 5 HP)			48 lbs.

CALL for CURRENT PRICING

* Based on 10' water lift.