
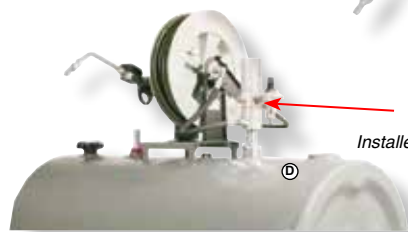


Tanks & Dispensing Systems for Motor Oils, Gear Oils, Transmission & Hydraulic Fluids


These systems include 5:1 air-operated pumps suitable for warm or cold motor oils, gear oils, transmission and hydraulic fluids. Pumps provide 5 GPM and include bung adapter and foot valve. Standard meter included is electronic Preset BP100 Series with quart calibration with flexible spout and automatic high flow tip. Standard spring rewind hose reel is included with 25' or 50' of 1/2" hose (up to 75' available), roller guide, hose stop and 2' inlet hose as shown. 150 PSI air filter/regulator with gauge is also included. Pumps come with a 5 year warranty (1 year on meters). Pump requires a 12 CFM air supply (clean & dry).

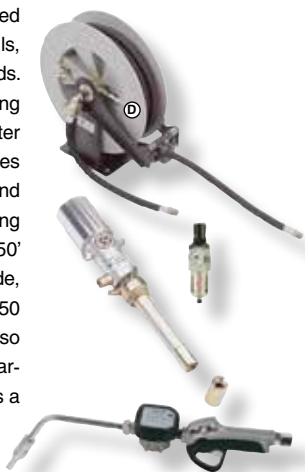

RS2525
Shown
Installed on 275 Gallon
Oval Tank

Note: If you plumb any of these systems with hard rigid piping, it is strongly recommended that you use relief kit #540025 with #22159 bung spacer. **Tanks Sold Separately - See Below.**

Part No.	Description
PJ RS2525	5:1 Air Operated Oil Dispensing System with 25' Hose Reel.
PJ RS2550	5:1 Air Operated Oil Dispensing System with 50' Hose Reel ...
PJ 540025	Relief Valve Kit
PJ 22159	2" Bung Spacer



Answered All My Questions!
"Called was assisted by a very helpful lady named Carla all questions answered and order filled, fantastic service."

Dave

275 & 330 Gallon Compact Oil Storage Tanks (UL 142 listed)

These **Compact Tanks** are constructed to UL 432 standards from 12-gauge carbon steel. Horizontal models include reinforced strap legs as shown. Tanks have (3) 2" openings and (1) 1" drain port. Powder coat paint finish.



275H



275V

Note: Tanks Includes Bottom Drain Port (3/4" or 1")

Part No.	Description	Dimensions	Wt.
PJ 275H	275 Gallon Steel Oval Horiz. Tank	60"L x 27"W x 50"H	328 lbs.
PJ 275V	275 Gallon Steel Oval Vert. Tank	45"L x 27"W x 64"H	328 lbs.

Call Toll Free For Prices

AC Oil Pump 5 GPM

This **Compact 115 Volt Electric Oil Pump** produces a maximum flow rate of 5 GPM. Maximum viscosity is 30 wt. Designed to fit 55 gallon drums up to 330 gallon totes. The non-drip tip allows for filling measures and containers easily and reduces spills. Approximately 12" of clearance between the barrel and discharge spout. Includes a 20 volt DC power supply with 6 amp output. Compatible with oil, automatic transmission fluid, windshield wash fluid and anti-freeze. The telescoping suction tube extends from 33.5" to 49".

Note: Only pump up to 10wt - 30wt oils.



7050



Part No.	Description
NS 7050	115 Volt AC Oil Pump, 5 GPM
NS 7051	Replacement 20 Volt DC Power Supply for 7050

Portable Oil Drain / Pump System

For Draining Oil, ATF & Antifreeze from Tractors, Trucks & Sprayers Where a Lift Drain is Not Suitable



- Low Profile - Only 8" Tall
- 17 Gallon Capacity
- 8" H x 25" W x 46" L
- Used Oil is Transferred Via 115V Pump at 4 GPM (6' Grounded Cord & Plug)
- Translucent Body for Easy Viewing of Fluid Level
- Heavy Duty Polyethylene
- Wire Screen
- 2 Rear Stationary Wheels for Stability
- (2) Large Swivel Casters in Front
- 6 ft. Rubber Hose

Part No.	Description
NS 237	Portable Oil Drain / Pump System ...