



**Hot/Cold Water and Steam/Cold Water Mixing Systems** from *SuperKlean* are the perfect choice for blending hot and cold water to instantly achieve desired output temperatures for plant Washdown, Sanitizing and Cleaning.

*(SuperKlean Systems are Rated the #1 mixing stations based on independent testing by steam industry experts)*


**Common Industries that use these stations are:** Food and Beverage • Breweries • Refineries • Distillers • Dairies • Hog and Cattle packing plants • Seafood industry • Meat and Poultry processing and more.

All models feature a unique, Y body design for flexibility of installation and use. Available with brass, bronze or stainless components as noted. Inlet and outlet ports are 3/4" FPT.

## Hot & Cold Water Washdown Systems



**3600 Series Hot/Cold Water Mixing Systems** include globe control valves, check valves, hose rack, mounting plate and temperature gauge. Maximum temperatures to 200° F. and pressures to 150 PSI. Industry leading 5-year warranty on these models.

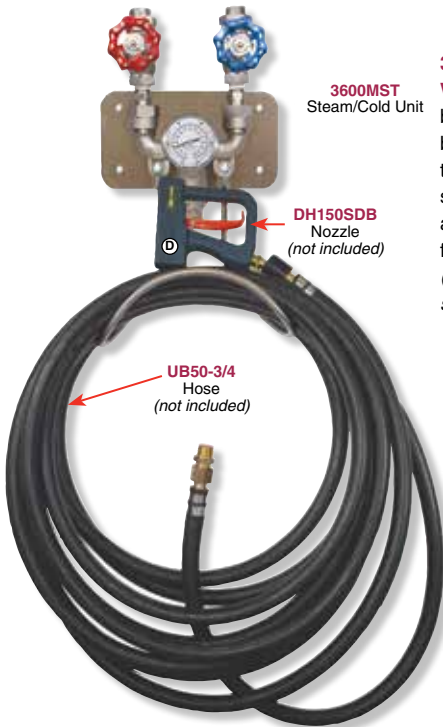

**3600MST**  
Steam/Cold Unit

**3600MBT Hot/Cold Water** unit features brass globe valves, brass check valves, temperature gauge, stainless mounting plate and stainless hose hook for up to 50' of 3/4" hose, (Hose not included but is shown below).

**DH150SDB**  
Nozzle  
(not included)

**UB50-3/4**  
Hose  
(not included)

*SuperKlean™*

*SuperKlean™*

**3600MST Hot/Cold Water** unit features stainless globe valves, stainless check valves, temperature gauge, stainless mounting plate and stainless hose hook for up to 50' of 3/4" hose, (hose not included but is shown below).



**3600MST**  
Stainless  
Hot/Cold Mix Unit



Part No.	Construction	Wt.
VD 3600MBT	Hot/Cold Mix Unit Brass/Stainless	20 lbs.
VD 3600MST	Hot/Cold Mix Unit Stainless	24 lbs.


## Duramix Steam/Cold Water Mixing Systems



**8000 Series Duramix Steam/Cold Water Mixing Systems** can operate with as little as 30 PSI water pressure, 30 PSI steam pressure. Dual output fittings allow for steam to the main outlet as well as hot water to the secondary outlet for other hot water needs. Automatic shut-off feature prevents live steam from passing through the unit. One-time temperature adjustment feature means no need to fine tune valves each time you use the system. Working pressures from 30-150 PSI, (Saturated Steam Only) and temperatures to 200° F. **Industry leading 3-year warranty.**

**8000GMBT Steam/Cold Water** unit features bronze mixer body, bronze globe valves, bronze check valves, temperature gauge, stainless mounting plate and stainless hose hook for up to 50ft of 3/4" hose, (hose not included but is shown below).

**8000GMST Steam/Cold Water** unit features 304 stainless mixer body, stainless globe valves, stainless check valves, temperature gauge, stainless mounting plate and stainless hose hook, (Hose not included but shown below).

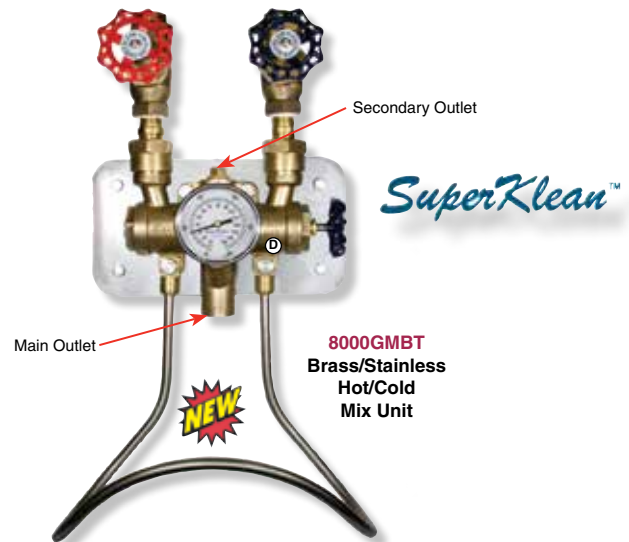

Secondary Outlet

Main Outlet  
**8000GMBT**  
Brass/Stainless  
Hot/Cold  
Mix Unit



*SuperKlean™*

Part No.	Construction	Wt.
VD 8000GMBT	Steam/Cold Unit Bronze/Stainless	26 lbs.
VD 8000GMST	Steam/Cold Unit Stainless	29 lbs.



## Washdown Hoses

**SuperKlean Washdown Hoses** are flexible, lightweight, durable and are designed with safety in mind. Designed for hot water and mild cleaning chemicals. Rated up to 200° F. and for use with saturated steam, (no live steam). All hoses feature (1) 1/2" MPT swivel adapter, (1) 3/4" MPT non-swivel adapter and (2) stainless hose bands on each end. (Note: 25', 75' and 100' hoses also available. All hoses usually ship in 1 to 2 days).

Part No.	Hose Type	Wt.
VD UB50-3/4	3/4" x 50' Black EPDM, Smooth Cover, 300 PSI	22 lbs.
VD UWS50-3/4	3/4" x 50' White EPDM, Smooth Cover, 300 PSI	22 lbs.
VD UBS50-5/8	3/4" x 50' Black EPDM, Wrap Cover, 300 PSI ...	25 lbs.
VD UWS50-5/8	3/4" x 50' White EPDM, Wrap Cover, 300 PSI...	25 lbs.