



Letter of Compliance

Product Description:	Modular compressed air piping system 3/4" thru 6" Fastpipe
Technical Specifications:	Compressed air, vacuum (29in-Hg), and inert gas applications 190 psi maximum working pressure, 600 psi burst pressure, temp range 0°F to 140°F Compatible with common compressor lubricants
General Ratings:	Conforms to ASME B31.1 UL94HB fire resistance, compliant to OSHA

Pipe Specifications:	Pipe: Aluminum alloy grade 6063 USA produced, 3/4"-2" Blue powder coat, color RAL5012 Green powder coat, color RAL6018 outside 3/4"-2" Non-chromate conversion coating inside Trade size callout measured with O.D.
-----------------------------	---



3/4" size	20 mm	.79 O.D. x .69 I.D
1" size	25mm	.98 O.D. x .87 I.D
1 1/2" size	40mm	1.57 O.D. x 1.43 I.D
2" size	50mm	1.97 O.D. x 1.81 I.D
3" size	80mm	3.15 O.D. x 2.98 I.D
4" size	100mm	4.20 O.D. x 3.78 I.D
6" size	150mm	6.02 O.D. x 5.75 I.D

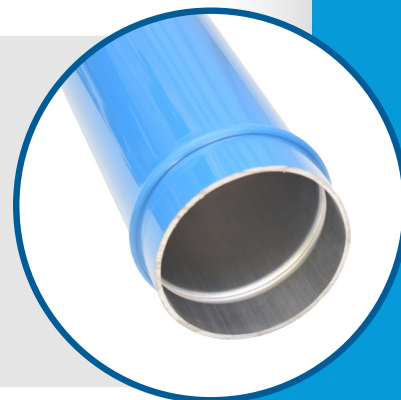

Fitting Specifications:

Compression Style

3/4" thru 2" Body: nylon 6 with fiberglass reinforcement, blue color

3" Body: Diecast aluminum, then electrocoated, black color

Bite Ring: stainless steel

O-Ring: nitrile



Compression Style

3" Body: Diecast aluminum, then electrocoated, black color

Bite Ring: stainless steel

O-Ring: nitrile



Lug Style

4" - 6" Body: Diecast aluminum/Steel, Powdercoat

Inner Seal: nitrile



PRODUCTS MANUFACTURED BY THE SELLER CARRY A LIMITED ONE YEAR WARRANTY

RapidAir Products | www.rapidairproducts.com
6111 Mill Creek Drive Auburndale, WI 54412 | 800-954-3310

06-2020