

# SCOT


## FRAMEPUMP™ — VARIABLE SPEED

1 1/8" SHAFT, 4 X 3 X 6.50 NPT


# FPS 556

JM140

3160

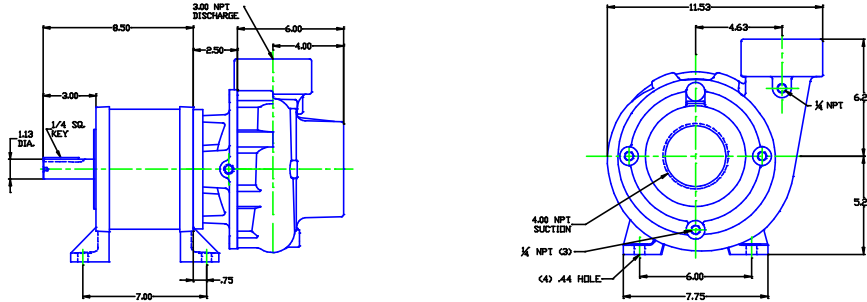

ALL DIMENSIONS IN INCHES

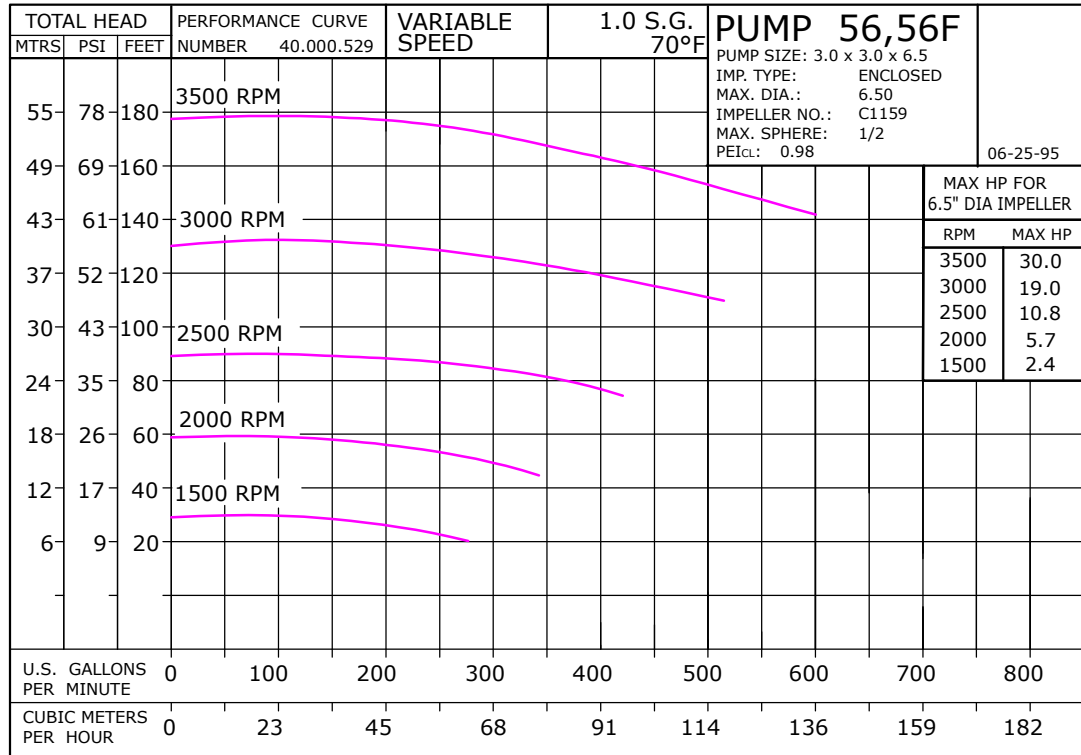

D056FPJM140-4  
056JM140


056VS

# FPS 556

JM140

056JM140-A  
81.001.304 M19

# FPS 556 • Iron • 1 1/8" Shaft • JM140

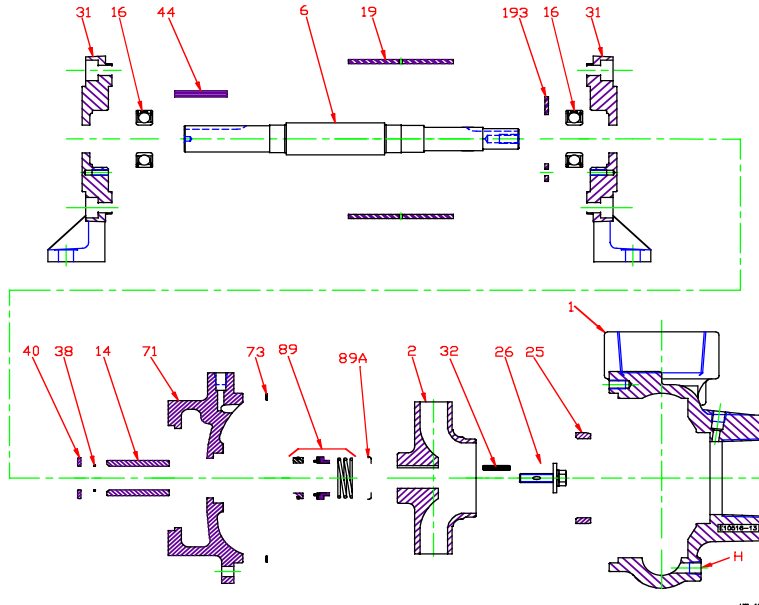

KEY NO.	PART NAME	FPS 556
1+	CASE, IRON, 4 x 3 NPT	130.000.244X1
	CASE, IRON, 3 x 3 FLG	130.000.185X1
2	IMPELLER, 7/8" KEYED, ENCLOSED, 6.50" DIAMETER: IRON	131.000.427
14*	SHAFT SLEEVE, STAINLESS	110.000.192
25	WEAR RING, STEEL	103.000.152
26*	IMPELLER RETAINER, STAINLESS	118.000.163A
38*	O-RING, SHAFT, VITON	116.000.105
40*	FLINGER	104.000.165
71	ADAPTER, IRON	132.000.202X1
73*	GASKET, CASE	116.000.157
89*	1½" SEALS: TYPE 21, VN-CARB/CM	101.000.191
	89A*	SEAL RETAINER
	BEARING FRAME ASS'Y CONSISTING OF:	JM140 118.000.213X
6+	SHAFT, ASS'Y	135.000.180X
16	BEARING (2 REQ'D)	103.000.146
19	SHELL	110.000.231
31	END BRACKET (2 REQ'D)	132.000.232
32*†	KEY	102.000.102
44†	KEY	102.000.194
193	RETAINER	110.000.244
--	REPAIR KITS: VN-CARB/CM SEAL	118.000.344A


+ INCLUDES STEEL WEAR RING  
 \* DENOTES COMPONENTS INCLUDED IN REPAIR KIT.  
 † DENOTES COMPONENTS INCLUDED WITH SHAFT ASSEMBLY

E056FPJM140

E15

P056JM140-A

# FPS 556 • Iron • 1 1/8" Shaft • JM140

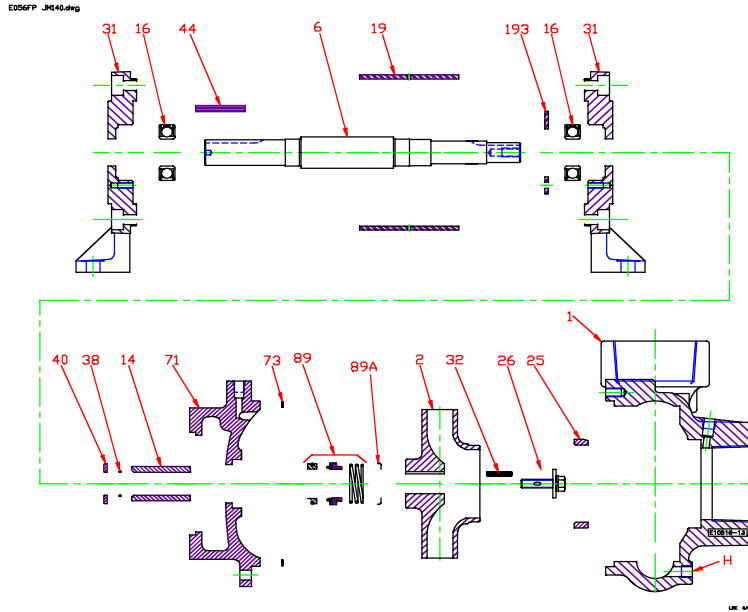

CONSTRUCTION OPTIONS		
KEY NO.	PART NAME	ALL IRON
1	Case	Iron
2	Impeller	Iron
6	Shaft Ass'y	Steel
14	Shaft Sleeve	Stainless
19	Shell	Iron
25	Wear Ring	Steel
26	Impeller Retainer	Stainless
32	Key	Stainless
38	O-ring, Shaft	Viton
40	Flinger	Stainless
44	Key	Stainless
71	Adapter	Iron
73	Gasket, Case	Fiber
89	Mechanical Seal, Type 21 VN-CARB/CM	Stainless
89A	Seal Retainer	Stainless
193	Retainer	Steel

E056JM140

D15

C056JM140-A