
Model 9204C

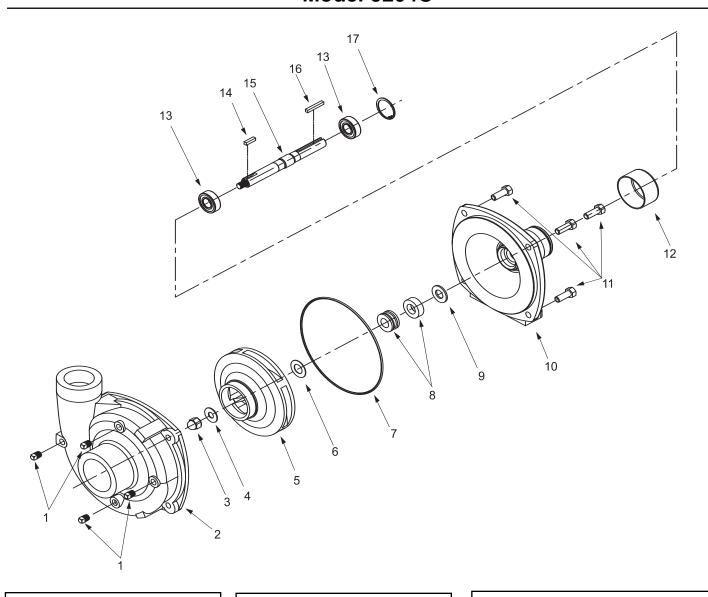

Seal Kit No. 3430-0332 for 9204C (Std.) consists of:

(1) Ref. 6 Gasket(1) Ref. 7 O-ring

(1) Ref. 8 Mechanical Seal

Seal Kit No. 3430-0589 (Silicon Carbide) consists of:

(1) Ref. 7 O-ring

(1) Ref. 8 Mechanical Seal


Note: When ordering parts, give quantity, part number, description and complete model number. Reference numbers are used ONLY to identify parts in the drawing and NOT to be used as order numbers.

| Ref. No. | Qty. Req'd. | Part No. | Description |
|-------------|----------------|-------------|--|
| 1 | 4 | 2406-0007 | Drain Plug |
| 2 | 1 | 0151-9200C | Pump Casing (includes SS wear ring) |
| 3 | 1 | 2253-0002 | Impeller Nut |
| 4 | 1 | 2270-0071 | Washer |
| 5 | 1 | 0401-9200P2 | Impeller (Nylon) |
| 6 | 1 | 1700-0100 | Gasket |
| 7 | 1 | 1720-0083 | O-ring |
| 8 | 1 | 2120-0008 | Mechanical Seal (Buna-N - Optional) |
| 8 | 1 | 2120-0009 | Mechanical Seal (Viton - Standard) |
| 8 | 1 | 3430-0589 | Mechanical Seal (Silicon Carbide-Opt.) |

| Ref. | | | | | | | |
|------|--------|-------------|------------------|--|--|--|--|
| No. | Req'd. | Part No. | Description | | | | |
| 9 | 1 | 1410-0056 | Slinger Ring | | | | |
| 10 | 1 | 0750-9200C3 | Mounting Flange | | | | |
| 11 | 4 | 2210-0020 | Bolt | | | | |
| 12 | 1 | 2300-0025 | Protective Cover | | | | |
| 13 | 2 | 2000-0010 | Ball Bearing | | | | |
| 14 | 1 | 1610-0053 | Key | | | | |
| 15 | 1 | 0505-9200 | Pump Shaft | | | | |
| 16 | 1 | 1610-0004 | Key | | | | |
| 17 | 1 | 1820-0013 | Bearing Retainer | | | | |

| 9204C | | GPM at | HP | GPM at | HP | GPM at | HP | GPM at | HP | GPM at | HP | GPM at | HP | GPM at | HP |
|-------|------|---------------|-----|--------|-----|--------|------|--------|------|--------|------|--------|------|--------|-----|
| | RPM | 10 PSI | | 20 PSI | | 30 PSI | | 40 PSI | | 50 PSI | | 60 PSI | | 70 PSI | |
| | 2400 | 155 | 2.5 | 100 | 2.2 | | | | | | | | | | |
| | 3600 | 190 | 6.3 | 190 | 6.9 | 188 | 7.1 | 170 | 6.9 | 100 | 5.6 | | | | |
| | 4200 | 190 | 9.1 | 190 | 9.2 | 190 | 10.0 | 190 | 10.4 | 187 | 10.5 | 165 | 10.0 | 115 | 8.3 |

| 9204C | | LPM at | HP | LPM at | HP | LPM at | HP | LPM at | HP | LPM at | HP | LPM at | HP | LPM at | HP |
|-------|------|---------|-----|---------|-----|---------|------|---------|------|---------|------|---------|------|---------|-----|
| | RPM | 0.7 BAR | | 1.4 BAR | | 2.1 BAR | | 2.8 BAR | | 3.4 BAR | | 4.1 BAR | | 4.8 BAR | |
| | 2400 | 578 | 2.5 | 379 | 2.2 | | | | | | | | | | |
| | 3600 | 719 | 6.3 | 719 | 6.9 | 712 | 7.1 | 644 | 6.9 | 379 | 5.6 | | | | |
| | 4200 | 719 | 9.1 | 719 | 9.2 | 719 | 10.0 | 719 | 10.4 | 708 | 10.5 | 625 | 10.0 | 435 | 8.3 |

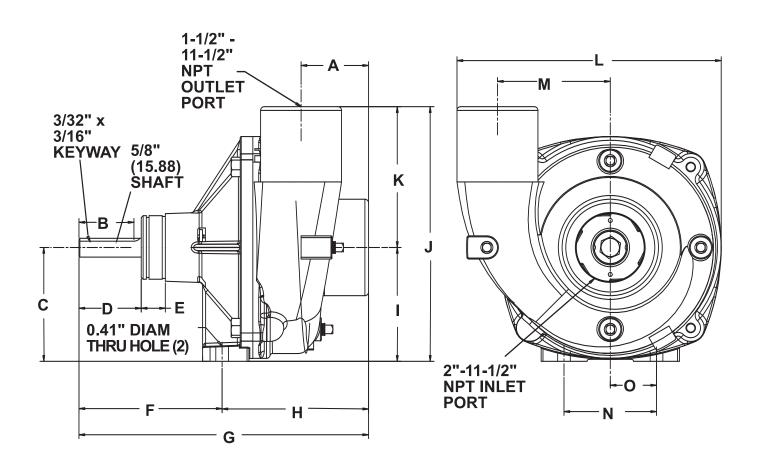

9204C **Dimensions** C G В Ε Н K L 0 Α D F M Ν Inches 2.19 1.78 3.69 2.02 8.25 4.56 3.66 0.78 | 4.64 | 9.39 | 4.75 | 3.69 | 8.56 1.5 55.6 45.2 93.7 51.3 | 19.8 | 118 239 121 93.7 210 116 38.1 217 93 76.2 mm