



## PW4000 Trigger Guns

**Spraying Systems PW4000 Trigger Gun.**

**Standard Features:** Bottom trigger pivot to reduce operator fatigue • Shut-off valve location designed to reduce heat build-up in handle • Packing screw accessible without separating handle halves • Handle is made of high strength polycarbonate construction.

**Specifications:** Inlet is 3/8" FPT • Outlet is 1/4" FPT • Maximum operating pressure is 4,000 PSI • Maximum operating temperature is 300° F. • Maximum flow rate is 10 GPM.

Part No.	Max. Flow	Max. Pressure
SS PW4000A	10 GPM	4000 PSI
<b>10% Discount on 5 or more guns</b>		



## Trigger Guns



Heavy-Duty design to withstand high impact and rough use. Smooth and easy to operate. Trigger lock retracts flush in handle. Stainless steel shut-off needle. Bronze-filled Teflon seat. **Note:** Weep style seat for freeze protection is available.

**Series 30:** Pressures to 1500 PSI, Maximum Temperature 200° F, Maximum Flow 5 GPM, Buna stem seal. Inlet is 1/4" FPT. Outlet is 1/4" FPT.

**Series 60:** Pressures to 2500 PSI, Maximum Temperature - 300° F, Maximum flow is 6 GPM, Viton® stem seal. Inlet is 3/8" FPT. Outlet is 1/4" FPT.

Part No.	Seat	Inlet	Outlet	PSI
SS 30-1/4	Zero Leak	1/4" FPT	1/4" FPT	1500
SS 60-3/8	Zero Leak	3/8" FPT	1/4" FPT	2500
SS AB30KIT	Repair Kit for 30-1/4 GunJets .....			
SS AB60KIT	Repair Kit for 60-3/8 GunJets .....			



## Fire Foam Trigger Guns



**Fire Foam Trigger Wands** are adjustable between **Straight** stream mist for rinsing and a **Fog** stream for creating excellent foam when used with foaming chemical products. An ideal choice for fire-fighting systems. Quick conversion from straight stream to fog stream by simply rotating the lance. Rated to 1500 PSI. 3/4" FPT inlet port. 13" Overall length. Weight is 4.8 lbs.

Part No.	Max. GPM	Max. PSI
CC 8400.060	3.5	1500
CC 8400.120	7.0	1500
CC 8400.160	9.0	1500
CC 8400.170	10	1500
CC 8400.300	17	1500

### SERVICE & REPAIRS


**Did you know?** We can service almost every brand of pump we sell in our catalog.

Call us at **1-800-228-9666** (Omaha, NE) for a quote!



Viton® is a registered trademark of DuPont Performance Elastomers

## GunJet Spray Guns

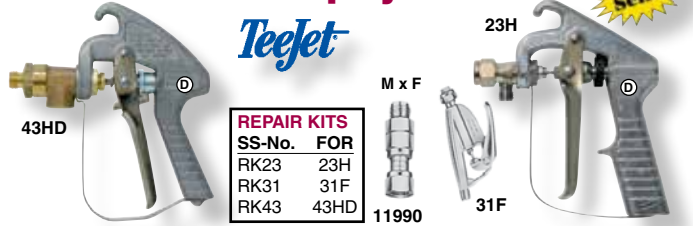

SS-No.	FOR
RK23	23H
RK31	31F
RK43	43HD

**23H GunJet:** Light-Duty, less spray tip. For use with interchangeable TeeJet spray tips. Brass inlet body, aluminum alloy handle. Pressures to 1000 PSI. Flow to 5-GPM. 1/4" MPT inlet connection. Stainless steel valve stem. Nickel plated steel trigger. Teflon seat and packing with adjustable external packing nut.

**31F GunJet:** For pressures to 500 PSI and flow rates to 5-GPM. A comfortable palm fitting gun for use with any TeeJet spray tip. Spray tip not included. Brass forged body. Nickel-plated trigger. Teflon seat and packing. Adjustable external packing nut. Stainless steel valve stem. 1/4" FPT inlet.

**43HD GunJet:** Heavy-Duty and used with interchangeable spray tips. Handles pressures to 800-PSI on flow rates to 20-GPM. 1/2" FPT Inlet. Stainless steel valve stem. Nylon seat and thermo leather packing with external adjustable packing nut. Brass inlet body. Aluminum alloy handle. Trigger action control valve has trigger lock. Less spray tip and cap.

Part No.	SS 23H	SS 31F	SS 43HD	SS 11990-12	SS 11990-19	SS RK23	SS RK31	SS RK43
----------	--------	--------	---------	-------------	-------------	---------	---------	---------


## Lawn Spray Guns



**Model 25660** is constructed of nylon with Viton® O-rings and Stainless Steel springs. **Features:** Interchangeable nozzle tips that are color coded for easy identification of tip size • "Shower head" spray pattern • Convenient trigger lock for continuous spraying • Maximum operating pressure of 200 PSI.

Part No.	Tip Color	GPM@ 20 PSI
SS 25660-0	Spray Gun Only	-
SS 25670-1.5NY	Nozzle Tip	4.0
SS 25670-3.0NY	Nozzle Tip	5.6
SS 25670-4.0NY	Nozzle Tip	6.4
SS 25990	Hose Shank Swivel, 1/2" Shank	
SS 25657NYB	Adapter	
SS 22665-15PP	15" Extension	
SS 22665-24PP	24" Extension	
SS CP22673PP	45° Adapter, 11/16" mm	
SS CP22664PP	Straight Adapter, 11/16" mm	

## Hand Spray Gun Extensions for Spraying Systems Guns

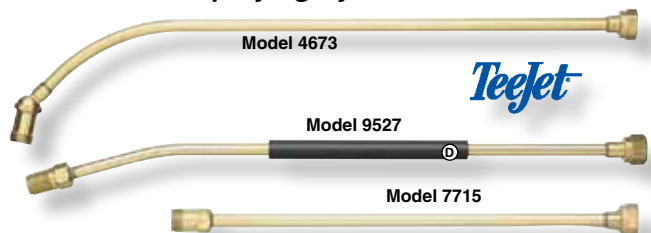

**Curved Brass Hand Gun Extensions** are lightweight for pressure up to 1000-PSI. Fits 11/16" outlet connections on GunJet Spray Guns 23H, 31F & 43HD. Brass extension with rubber covered section for hand protection while spraying hot liquids on **Model 9527**. **NOTE:** Model 4673 is curved with a swivel body.

Part No.	Style	Length	Max. Pressure
SS 4673-24	Curved	24"	125
SS 4673-36	Curved	36"	125
SS 9527-18	Curved	18"	1000
SS 9527-48	Curved	48"	1000
SS 7715-8	Straight	8"	250
SS 7715-18	Straight	18"	250