

Mobile Trailer Pressure Washers



Mobile Trailer Pressure Washers

Simpson 9500 Series Trailer Washers for Pressure Washing and Cleaning applications. Designed for a variety of tough, commercial cleaning requirements. Perfectly suited for contract cleaners, auto dealers, municipalities, industrial locations and more. Hot or Cold water as listed. All models have LED running lights and are NATM certified for over-the-road use. All models can be easily pulled by pickups, tractors or large All-Terrain vehicles.

Standard features include: 2" coupler ball hitch • Swivel tongue jack • Heavy-duty, welded steel frames with powder-coated finish • Manual hose reels • Low oil shutdown protection on all engines • 100-200 gallon water supply tanks • 50' or 100' high pressure hoses with quick couplers, trigger wand and extension.



Model 95000 (Cold Water)



95000

Features: Cat pump rated to 2.8 GPM @ 3200 PSI. Honda GX200 rope pull engine, 100 gallon water tank. 2000 lb. axle rating, 12", 6-Ply tires. 50' hose, NATM certified, overall length is 7'.

Model 95000

Part No.	Output	Engine	Tank	Wt.
FN 95000	2.8 GPM @ 3200 PSI	Honda GX200	100 Gal.	750 lbs.

Model 95001 (Cold Water)



95001

Features: Cat pump rated to 3.5 GPM @ 3800psi. Honda GX270 rope pull engine, 150 gallon water tank. 2000 lb. axle rating, 12", 6-ply tires. 100' hose, NATM certified, overall length is 9'.

Model 95001

Part No.	Output	Engine	Tank	Wt.
FN 95001	3.5 GPM @ 3800 PSI	Honda GX270	150 Gal.	900 lbs.



This Was My First Order ...

"This was my first order with you and you came through in these uncertain times of Covid, I thank you and will be using you again soon."

Anthony Collins


Model 95002 (Cold Water)



Features: Cat pump rated to 4.0 GPM @ 4200 PSI. Honda GX390 rope pull engine, 150 gallon water tank, 2000 lb. axle rating, 12", 6-ply tires, 100' hose, NATM certified, overall length is 9'.

Model 95002

Part No.	Output	Engine	Tank	Wt.
FN 95002	4.0 GPM @ 4200 PSI	Honda GX390	150 Gal.	900 lbs.

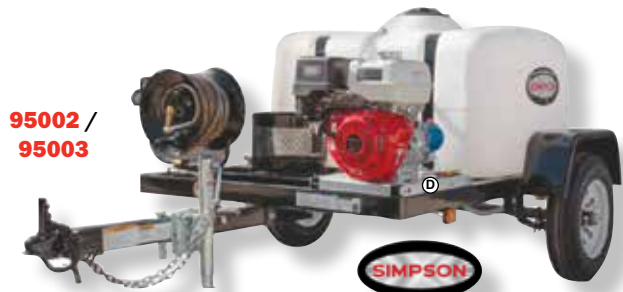

95002 / 95003



Model 95003 (Cold Water)

Features: Cat pump rated to 4.0 GPM @ 4200 PSI. Honda GX390 gas engine with electric start, 150 gallon water tank, 2000 lb. axle rating, 12" 6-Ply tires, 100' hose, NATM certified, overall length is 9'

Model 95003

Part No.	Output	Engine	Tank	Wt.
FN 95003	4.0 GPM @ 4000 PSI	Honda GX390	150 Gal.	900 lbs.

Model 95005 (Hot Water)

Features: Commercial Grade Comet pump rated to 4.0 GPM @ 4000 PSI. Honda GX390 Gas engine with electric start, 200 gallon water tank, 3500 lb. axle rating, 13", 6-Ply tires, 100' hose, NATM certified. Overall length is 9'. Includes 6 gallon gasoline tank and 11 gallon burner fuel tank. Also includes additional 75' hose and reel for filling water tank.



95005

Model 95005

Part No.	Output	Engine	Tank	Wt.
FN 95005	4.0 GPM @ 4000 PSI	Honda GX390	200 Gal.	1300 lbs.